



EC Building Supply is a professional building materials supplier based in Long Island, New York. Founded by a team with extensive experience in construction and engineering, our mission is to provide high-quality and reliable building materials and solutions for contractors, developers, and property management companies across the region.

Since our establishment, we have adhered to the principles of integrity, quality, and service excellence. By maintaining long-term partnerships with trusted manufacturers and suppliers, we ensure that every client receives dependable products at competitive prices.

From residential and commercial projects to large-scale developments, EC Builder Supply is your trusted partner for all construction needs.




Hospitality Lighting

2025

Catalog



Project Cases

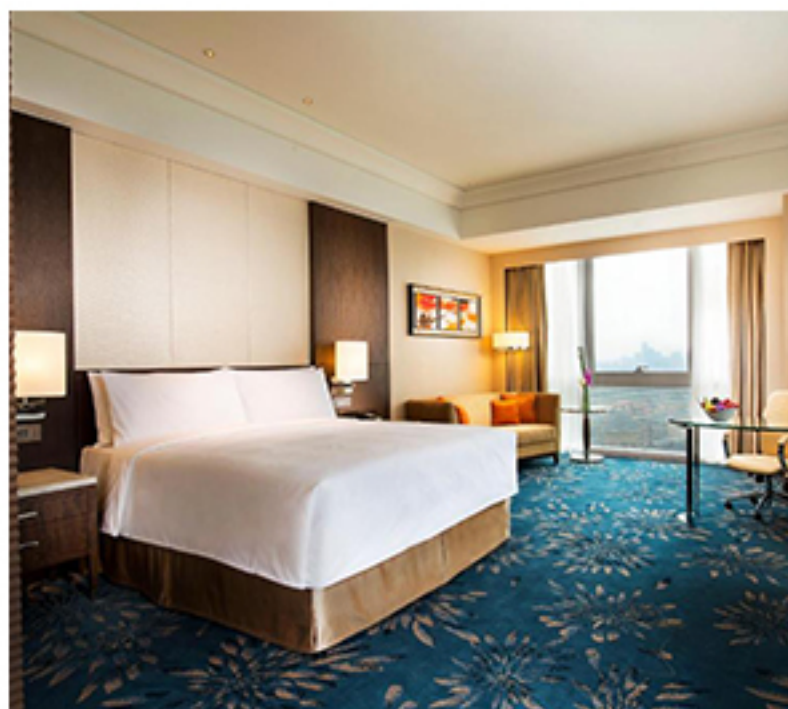



Hampton Kinetic



FORMULA BLUE COLLECTION



(Ceiling Light)



(Desk)



(Pendant)



(Single Wall)



(Double Wall)

DAWN

COLLECTION



(Single Wall)



(Double Wall)



(Floor Lamp)



(Single Table)



(Twin Table)



(Ceiling Light)

HOME 2 COLLECTION



CITY SEA SUN COLLECTION



NEW

SLEEP INN



NEW


COUNTRY INN



Holiday Inn H-5



Fairfield Inn
& Suits

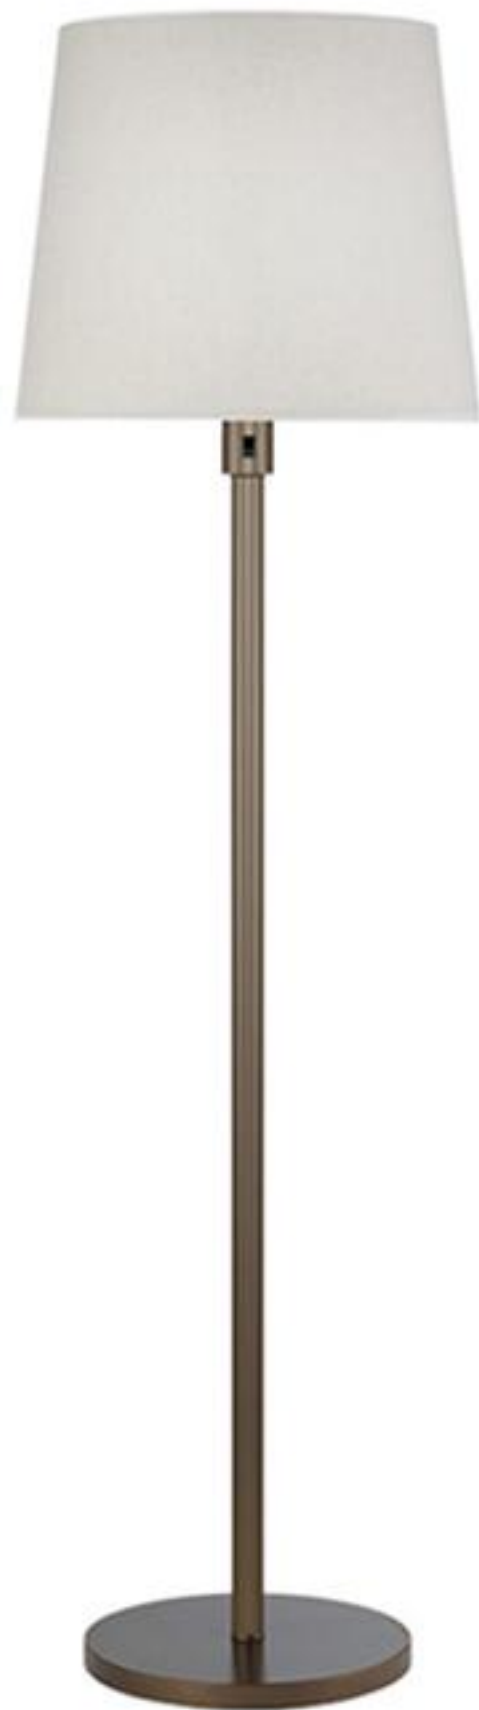

HOLIDAY INN

COLLECTION



Americinn



LA
QUINTA



GATSBY

COLLECTIONS



(Desk)



(Single Table)



(Twin Table)



(Floor)



(Single Wall)



(Double Wall)



(Desk)



(Desk)



(Vanity)



(Wall Sconce)

GEMINI

COLLECTIONS

Staybridge Next Gen 7.0



Hilton Garden Inn Bloom



Hilton Garden Inn Revive



Courtyard




Best Western
Executive Residency



SpringHill

Suties

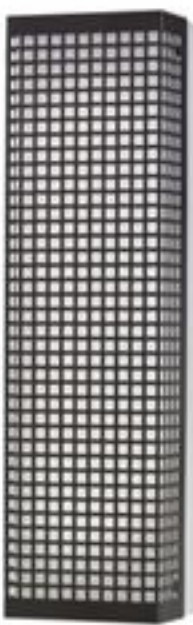

Crowne Plaza Worklife



TRULY URS

COLLECTION



(Desk)



(Side Table)



(Single Table)




(Twin Table)



(Single Wall)



(Double Wall)

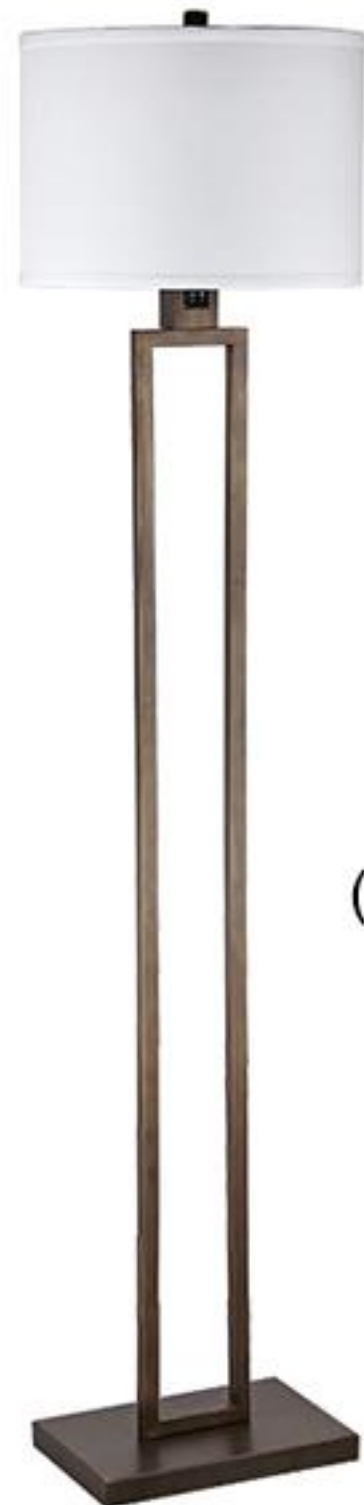

(Floor)

Super 8

- Innov8te scheme



CONFIDENT
COLLECTION



CORBEL

COLLECTIONS



(Single Wall)



(Double Wall)



(Single Table)



(Twin Table)



(Desk)



(Floor)

PRESTIGE COLLECTION



(Single Wall)



(Double Wall)



(Desk)



(Single Table)



(Twin Table)




(Floor)

CONTEMPORARY COLLECTIONS



(Single Wall)

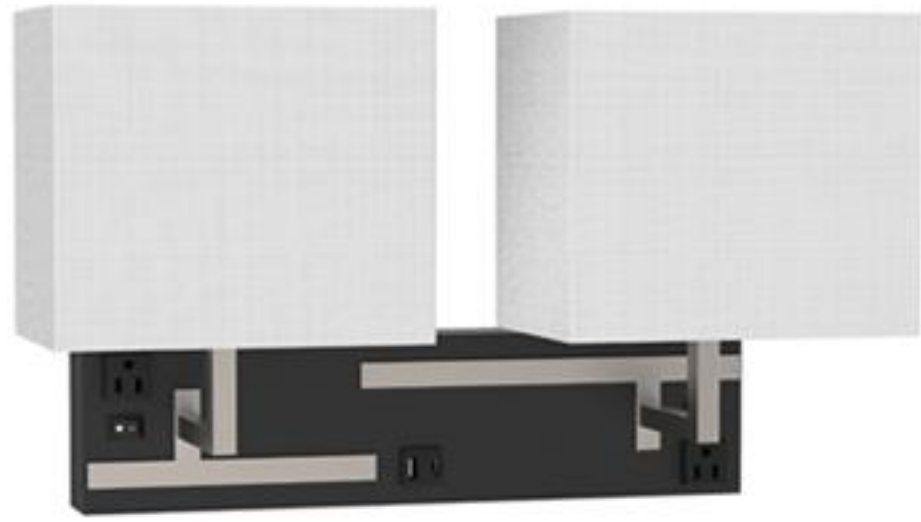

(Double Wall)



(Twin Table)



(Single Table)




(Floor)

ANDAAZ

COLLECTION



(Single Wall)

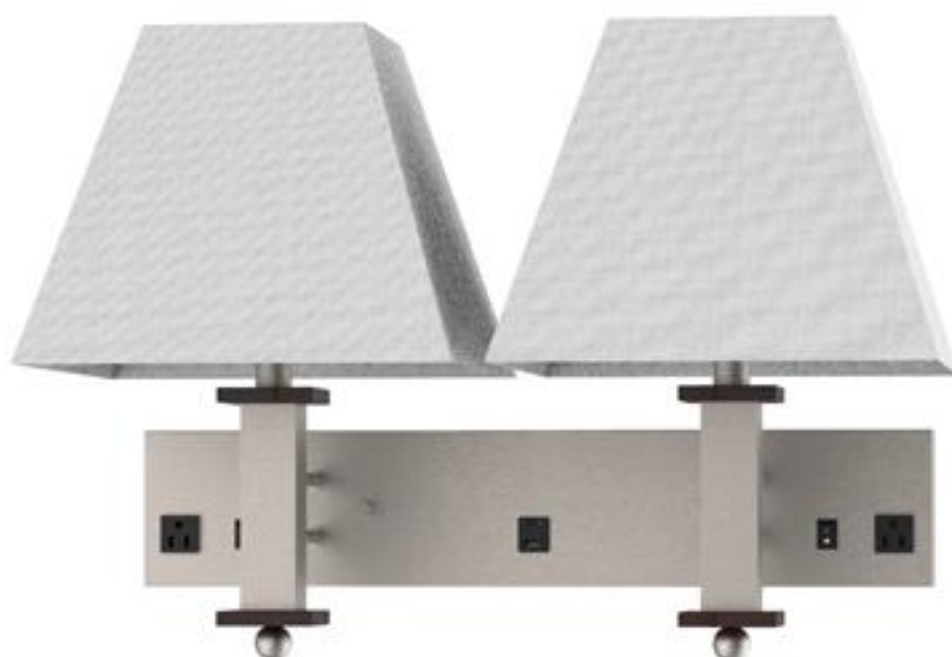

(Double Wall)




(Twin Table)



(Single Table)



(Desk)

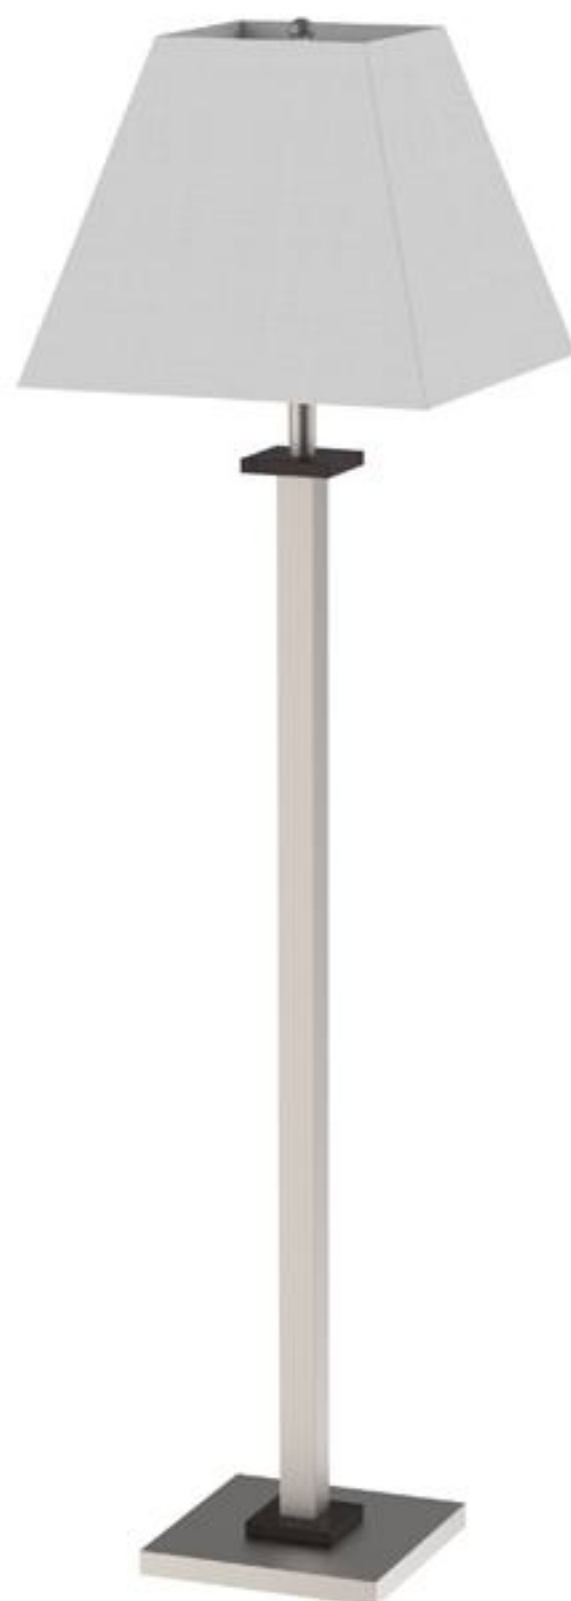

(Floor)

Hampton

Inn Casual



Carefree



Towneplace Suites

Real Living




Home2

Suites-Chelsea



Microtel by Wyndham



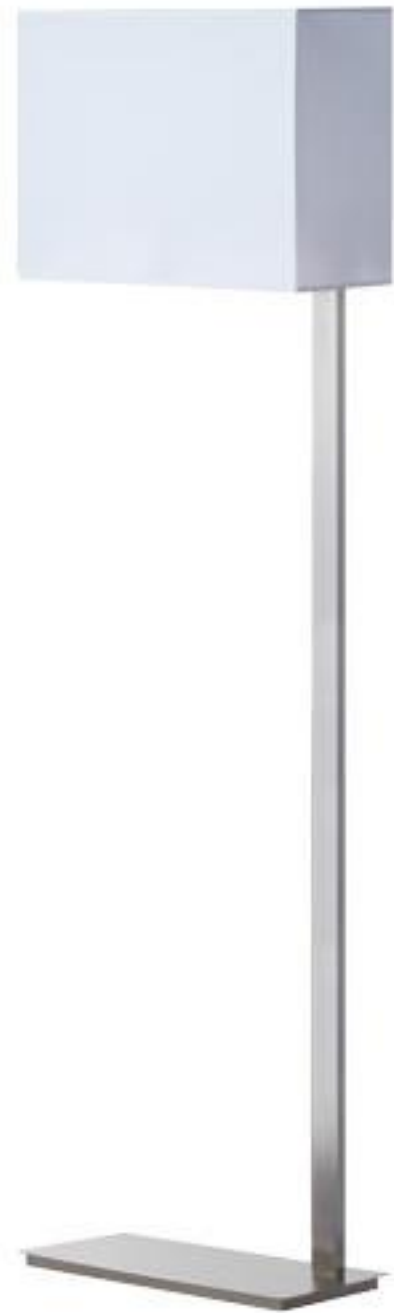

Hawthorn



Acrylic Headboard Sconce



Hallway Sconce

COLLECTION




Hallway Sconce

COLLECTION






Bath Vanity Light

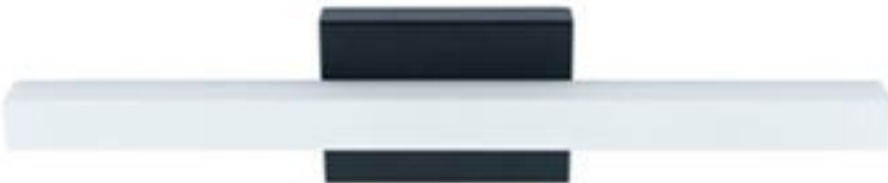

LED Mirror


COLLECTION

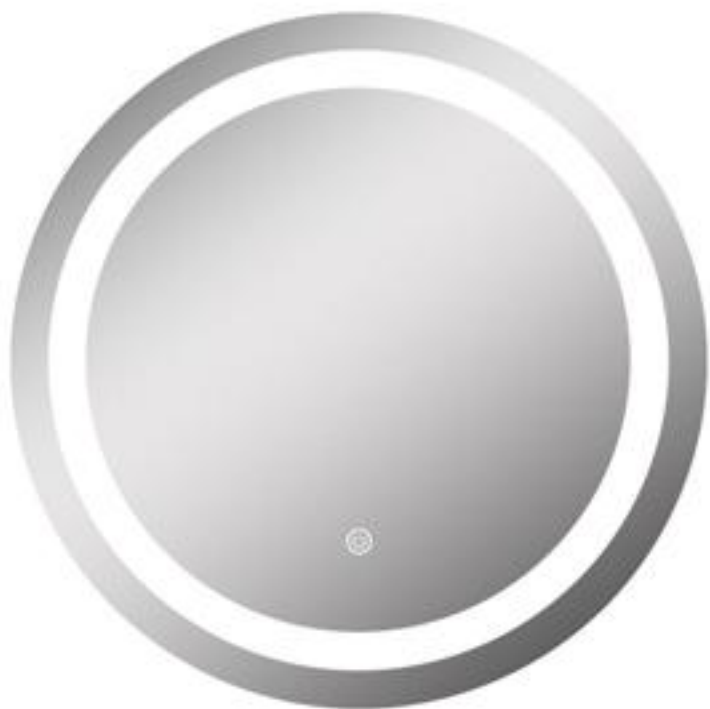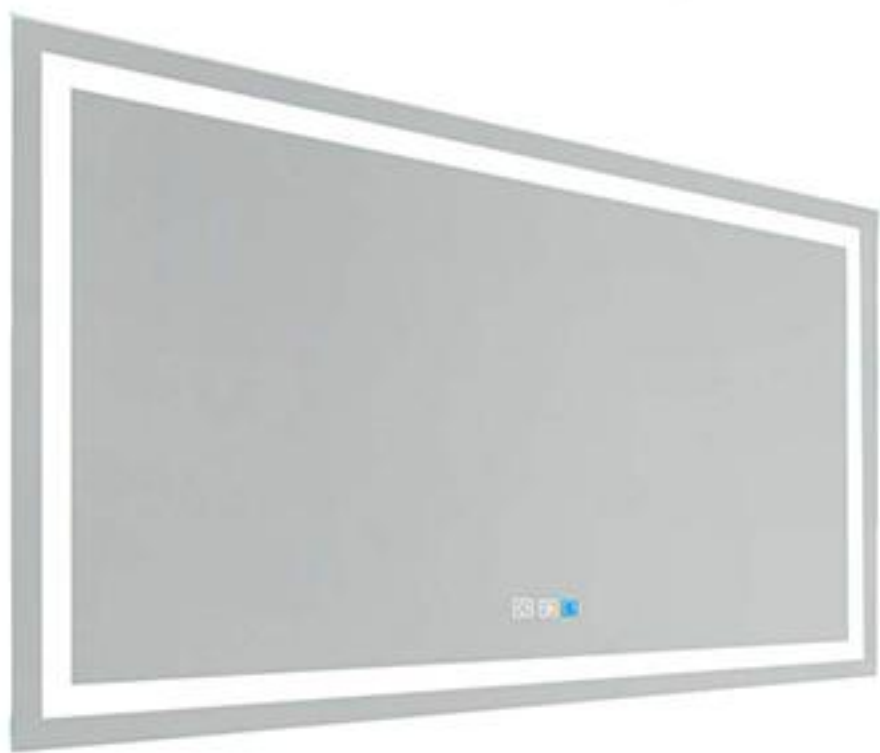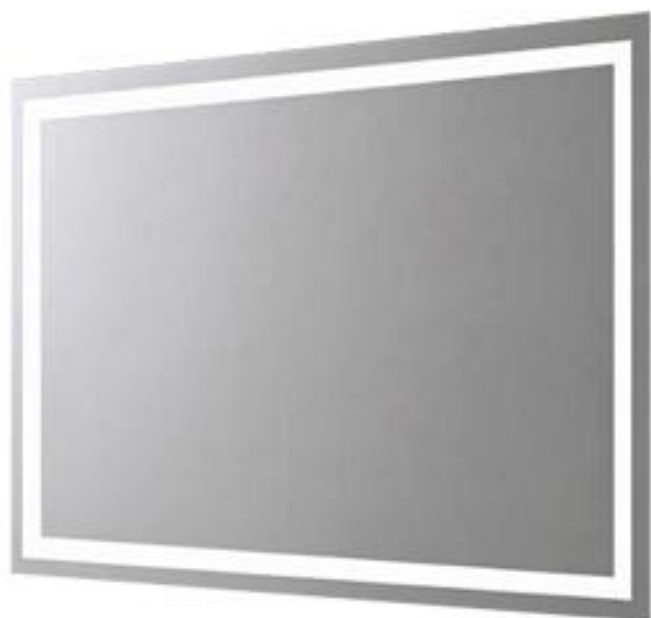


Testing Equipment



Integral Sphere Test

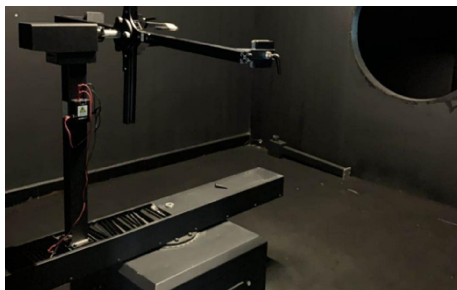

GMP-Goniophotometer

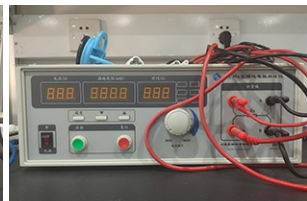

Assembly Workshop & Aging



Assembly Workshop



Finished Product 8 Hours Aging Test



Power Supply Production & Aging



Fully Automatic PCB Loader



LED Driver 8 Hours Aging Test



SMT Workshop



Die Casting Workshop



Finished Product Warehouse & Shipping Operations



TABLE OF CONTENTS


Product Categories

- SQUARE LED PANEL LIGHT 2
- LED SLIM PANEL LIGHT 3
- SLIM LED NIGHTLIGHT 5
- FIRE RATED LED PANEL LIGHT 6
- LED DOWNLIGHT 7
- FLUSH MOUNT CEILING LIGHT 13
- BACKLIT PANEL LIGHT 15
- LED LINEAR STRIP LIGHT 18
- T5 INTEGRATED TUBE LIGHT 21
- T8 INTEGRATED TUBE LIGHT 23
- WALL PACK LIGHT 25
- UFO HIGHBAY 27
- AREA LIGHT 30



SQUARE LED PANEL LIGHT

4" SQUARE LED PANEL LIGHT - 5 CCT SELECT

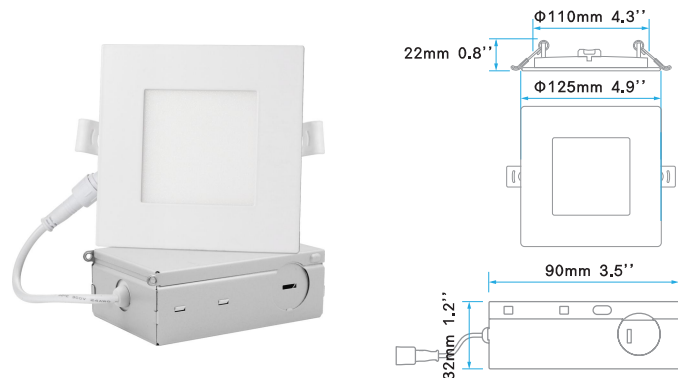

CUTOUT
4.3"
110mm

4"

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
820 LUMENS

DIMMABLE

TRIAC

0-10V


Product Model

A1QKF-9W-ETL



9W

6" SQUARE LED PANEL LIGHT - 5 CCT SELECT

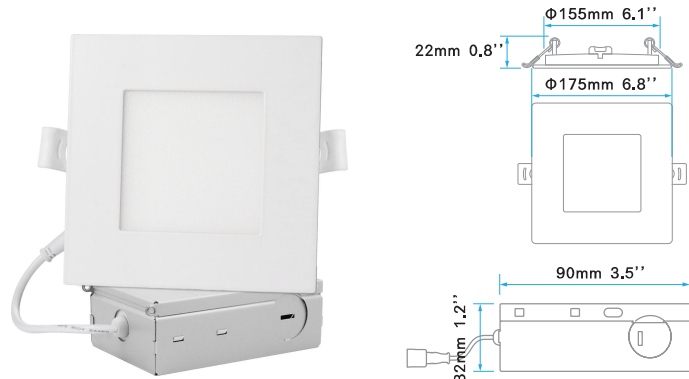

CUTOUT
6.1"
155mm

6"

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
1200 LUMENS

DIMMABLE

TRIAC

0-10V

Product Model

A1QKF-12W-ETL




12W



LED SLIM PANEL LIGHT

3" LED SLIM PANEL LIGHT - 5 CCT SELECT

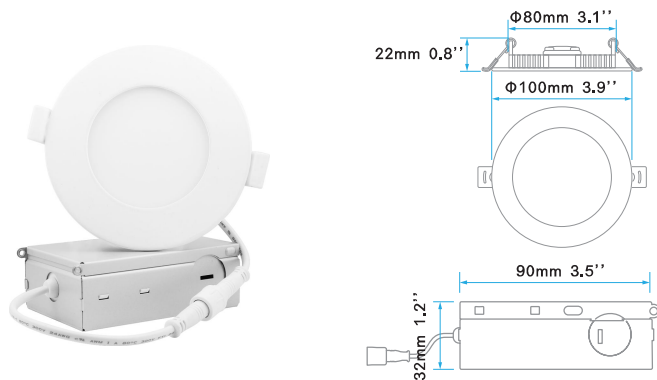

CUTOUT
3.1"
80mm

3"

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
440 LUMENS

DIMMABL
TRIAC

0-10V


Product Model
A1QK-6W-ETL



6W

LED SLIM PANEL LIGHT

4" LED SLIM PANEL LIGHT - 5 CCT SELECT

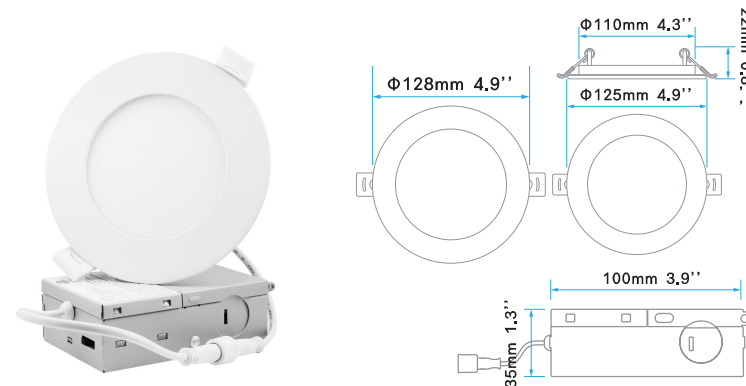

CUTOUT
4.3"
110mm

4"

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
750 LUMENS

DIMMABL
TRIAC


0-10V

Product Model
A1QK-9W-ETL



9W

6" LED SLIM PANEL LIGHT - 5 CCT SELECT

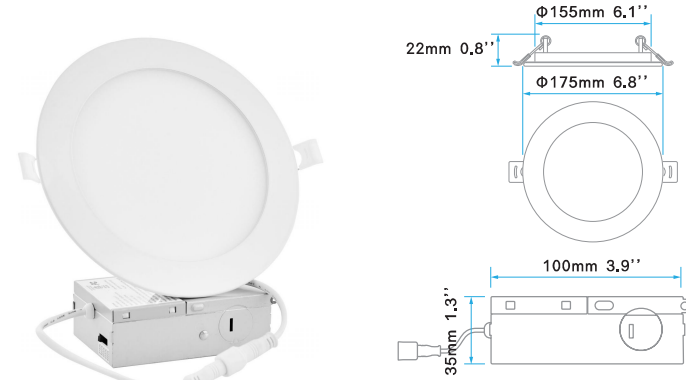

CUTOUT
6.1"
155mm

6"

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
1050 LUMENS

DIMMABL
TRIAC

0-10V


Product Model
A1QK-12W-ETL



12W

SLIM LED NIGHTLIGHT

4'' LED SLIM NIGHTLIGHT - 5 CCT SELECT

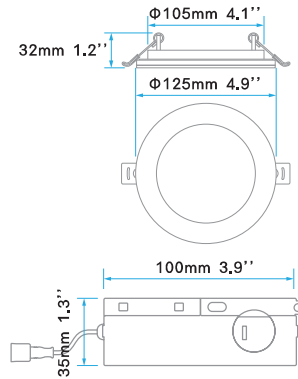

CUTOUT
4.1''
105mm


4''

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
750 LUMENS

DIMMABLE
TRIAC



Product Model
QK-YD9-5C-W



DIMMABLE
TRIAC
0-10V

120°

CRI
80


LIFE^{HR}
50,000

5
YEAR
WARRANTY

AC
120V

9W
+3W

6'' LED SLIM NIGHTLIGHT - 5 CCT SELECT

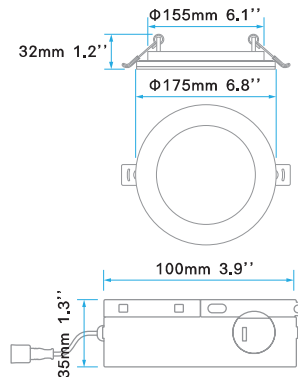

CUTOUT
6.1''
155mm


6''

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
1200 LUMENS

DIMMABLE
TRIAC



Product Model
QK-YD12-5C-W



DIMMABLE
TRIAC
0-10V

120°

CRI
80

LIFE^{HR}
50,000

5
YEAR
WARRANTY

AC
120V


12W
+3W

FIRE RATED LED PANEL LIGHT

4'' FIRE RATED LED PANEL LIGHT - 5 CCT SELECT



2 HOUR FIRE RATING
TESTED TO COMPLY WITH UL 263
ASTM E119 & CAN ULC S101

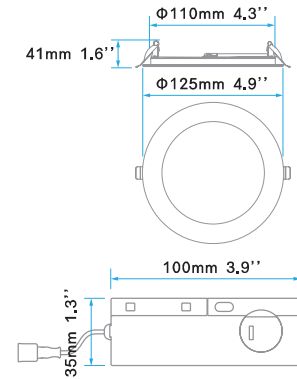

CUTOUT
4.3''
110mm

4''

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
750 LUMENS

DIMMABLE
TRIAC

Product Model
10X-FR-5CCT



DIMMABLE
TRIAC
0-10V

120°

CRI
80

LIFE^{HR}
50,000

5
YEAR
WARRANTY


AC
120-277V

10W

6'' FIRE RATED LED PANEL LIGHT - 5 CCT SELECT



2 HOUR FIRE RATING
TESTED TO COMPLY WITH UL 263
ASTM E119 & CAN ULC S101

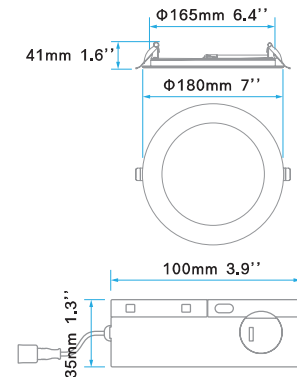

CUTOUT
6.4''
165mm

6''

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
1050 LUMENS

DIMMABLE
TRIAC

Product Model
12X-FR-5CCT



DIMMABLE
TRIAC
0-10V

120°

CRI
80

LIFE^{HR}
50,000


5
YEAR
WARRANTY

AC
120-277V

12W

LED DOWNLIGHT

3" LED DOWNLIGHT - 5 CCT SELECT 15° TILT

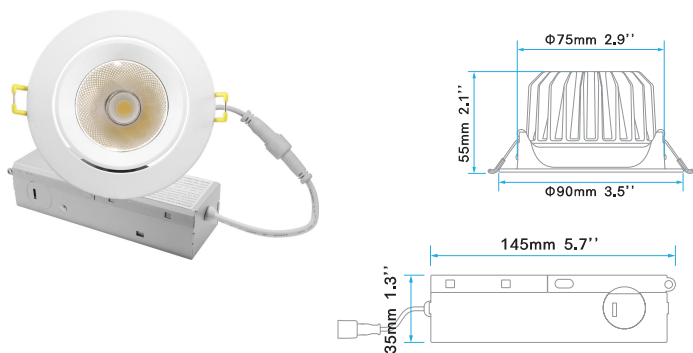

CUTOUT
2.9" 75mm

3"

5 COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
744 LUMENS

DIMMABL
TRIAC

0-10V


15° TILT

Product Model
QK-BM9W-5C-W



9W

4" LED DOWNLIGHT - 5 CCT SELECT 15° TILT

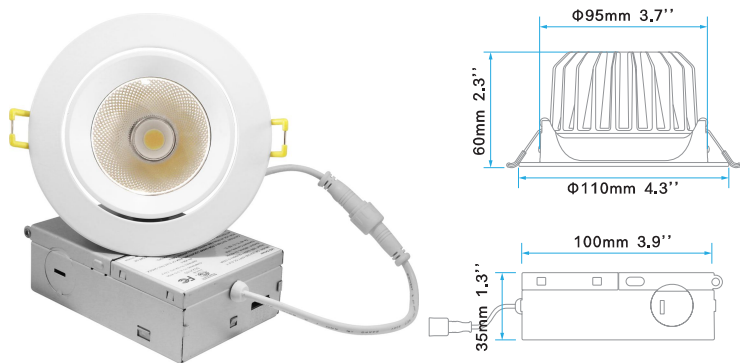

CUTOUT
3.7" 95mm

4"

5 COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
1200 LUMENS

DIMMABL
TRIAC

0-10V

15° TILT


Product Model
QK-BM-12W-A-5C



12W

LED DOWNLIGHT

4" LED GIMBAL LIGHT - 5 CCT SELECT 90° TILT 360° ROTATION

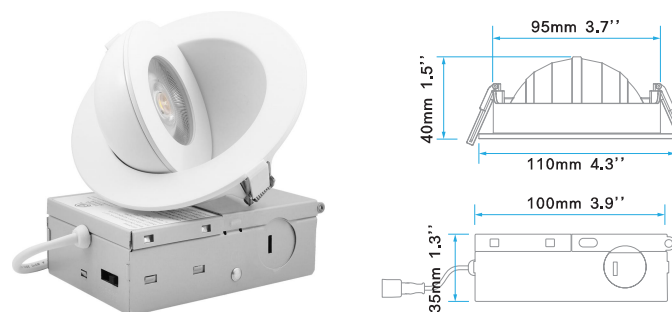

CUTOUT
3.7" 95mm

4"

5 COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
1100 LUMENS

DIMMABL
TRIAC

0-10V


90° TILT
360° ROTATION

Product Model
Q-A4-8-12W-XX



12W

4" LED DOWNLIGHT - 5 CCT SELECT

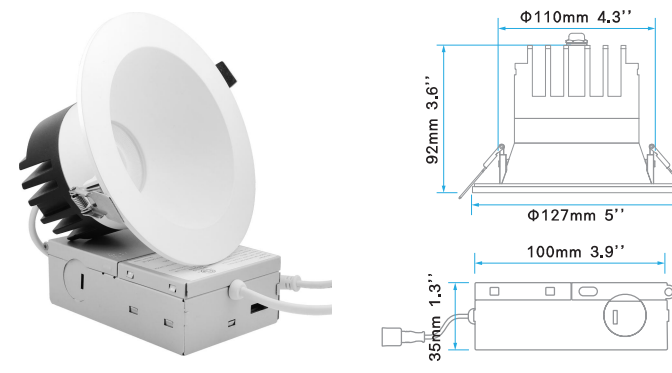

CUTOUT
4.3" 110mm

4"

5 COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
1200 LUMENS

DIMMABL
TRIAC

0-10V

Product Model
Q-A3-8-12W-XX



12W

LED DOWNLIGHT



LED DOWNLIGHT - 5 CCT SELECT

3" 4" 5" 6"


0-10V

5 COLOR SELECTABLE


DIMMABLE

2700K 3000K 3500K 4000K 5000K

TRIAC



SIZE

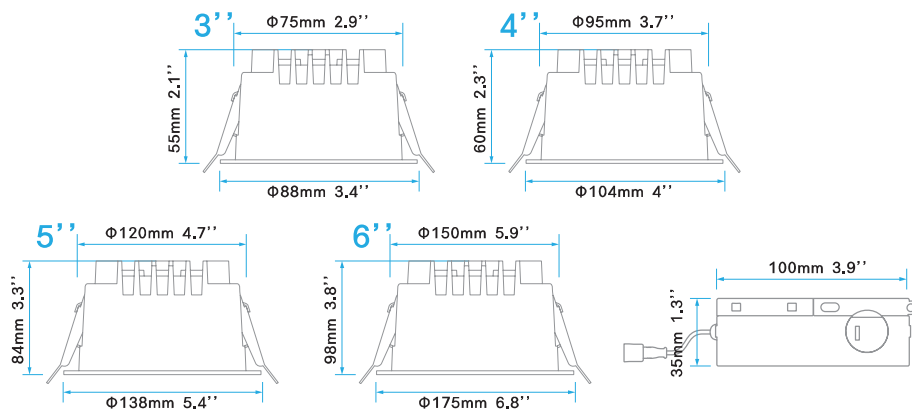

PRODUCT PARAMETER

SIZE	MODEL	INPUT VOLTS	WATTAGE	LUMEN	CUTOUT
3"	QK-JD-9W-A-XX	AC 120-277	9W	720	2.9" 75mm
4"	QK-JD-12W-A-XX	AC 120-277	12W	1100	3.7" 95mm
5"	QK-JD-24W-A-XX	AC 120-277	24W	2100	4.7" 120mm
6"	QK-JD-30W-A-XX	AC 120-277	30W	2750	5.9" 150mm

LED DOWNLIGHT



LED DOWNLIGHT - 5 CCT SELECT

3" 4" 5"


0-10V

5 COLOR SELECTABLE


DIMMABLE

2700K 3000K 3500K 4000K 5000K

TRIAC



SIZE

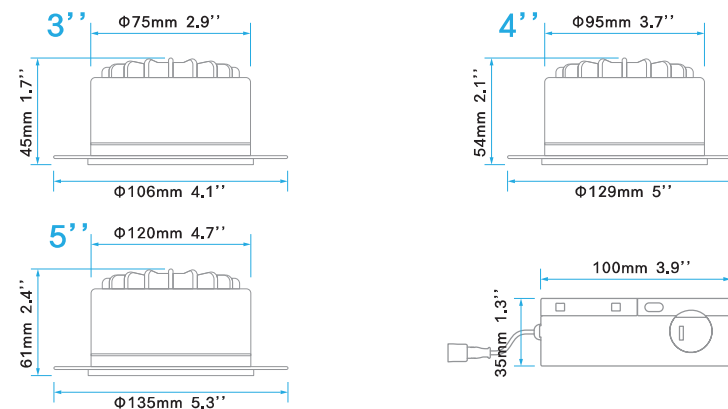

PRODUCT PARAMETER

SIZE	MODEL	INPUT VOLTS	WATTAGE	LUMEN	CUTOUT
3"	QK-75COB-JM-QR	AC 120-277	9W	720	2.9" 75mm
4"	QK-95COB-JM-QR	AC 120-277	15W	1350	3.7" 95mm
5"	QK-120COB-JM-QR	AC 120-277	24W	2160	4.7" 120mm

LED DOWNLIGHT



LED DOWNLIGHT - 5 CCT SELECT

3" 4" 5"

0-10V





5 COLOR SELECTABLE

DIMMABLE
TRIAC

2700K 3000K 3500K 4000K 5000K



SIZE



PRODUCT PARAMETER

SIZE	MODEL	INPUT VOLTS	WATTAGE	LUMEN	CUTOUT
3"	QK-75SMD-SCJ	AC 120-277	9W	990	2.9" 75mm
4"	QK-95SMD-SCJ	AC 120-277	15W	1650	3.7" 95mm
5"	QK-120SMD-SCJ	AC 120-277	24W	2640	4.7" 120mm

LED DOWNLIGHT



LED DOWNLIGHT - 5 CCT SELECT

3" 4" 5"

0-10V





5 COLOR SELECTABLE

DIMMABLE
TRIAC

2700K 3000K 3500K 4000K 5000K



SIZE




PRODUCT PARAMETER

SIZE	MODEL	INPUT VOLTS	WATTAGE	LUMEN	CUTOUT
3"	QK-LQ3-9W-WB-CCT	AC 120-277	9W	900	3.1" 80mm
4"	QK-LQ4-12W-WB-CCT	AC 120-277	12W	1350	3.9" 100mm
5"	QK-LQ5-15W-WB-CCT	AC 120-277	15W	1800	5.1" 130mm



FLUSH MOUNT CEILING LIGHT

9" FLUSH MOUNT CEILING LIGHT



9"

5 COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
2200 LUMENS

DIMMABL
TRIAC

0-10V


Product Model
QK-CL9



20W

FLUSH MOUNT CEILING LIGHT

12" FLUSH MOUNT CEILING LIGHT



22mm 0.8"

12"

5 COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
2750 LUMENS


DIMMABL
TRIAC

Product Model
QK-CL12



25W

16" FLUSH MOUNT CEILING LIGHT



22mm 0.8"

16"

5 COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
3850 LUMENS

DIMMABL
TRIAC

Product Model
QK-CL16




30W



BACKLIT PANEL LIGHT

1X4 BACKLIT PANEL LIGHT - 5 CCT & 3 WATTAGE SELECT

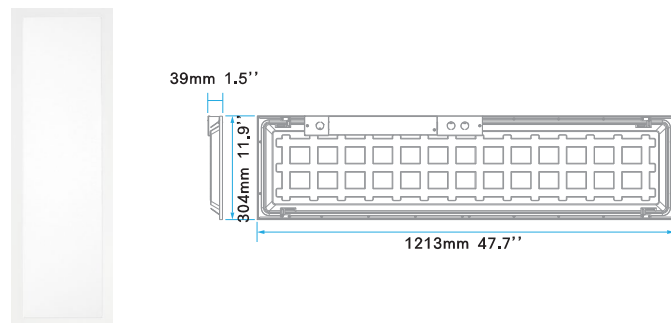

1X4ft

WATTAGE SELECTABLE
30W | 40W | 50W

3 COLOR SELECTABLE
3500K | 4000K | 5000K

BRIGHTNESS
3300/4400/5500 LUMENS

DIMMABLE
0-10V

Product Model
OK-BPLA-1*4-30W-50W-C-XXX-XX



Single Color | 120° | CRI 80 | LIFE 50,000 | 5 YEARS WARRANTY | 120-347V


Product Model
OK-BPLA-1*4-30W-50W-3C-XXX-XX



3 CCT | 120° | CRI 80 | LIFE 50,000 | 5 YEARS WARRANTY | 120-347V

BACKLIT PANEL LIGHT

2X2 BACKLIT PANEL LIGHT - 3 CCT & 3 WATTAGE SELECT

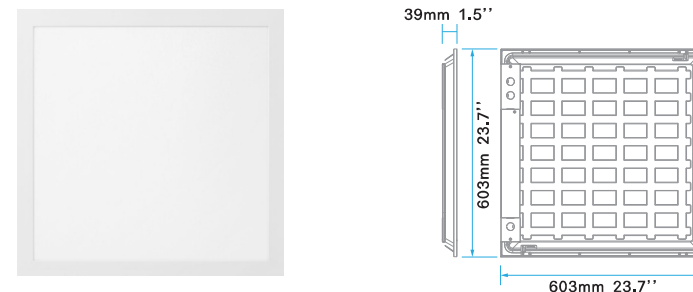

2X2ft

WATTAGE SELECTABLE
30W | 40W | 50W

3 COLOR SELECTABLE
3500K | 4000K | 5000K

BRIGHTNESS
3300/4400/5500 LUMENS

DIMMABLE
0-10V

Product Model
QK-BPLA-2*2-30W-50W-CXXX-XX




Single Color | 120° | CRI 80 | LIFE 50,000 | 5 YEARS WARRANTY | 120-347V

Product Model
QK-BPLA-2*2-30W-50W-3CXXX-XX



3 CCT | 120° | CRI 80 | LIFE 50,000 | 5 YEARS WARRANTY | 120-347V

2X4 BACKLIT PANEL LIGHT - 3 CCT & 3 WATTAGE SELECT

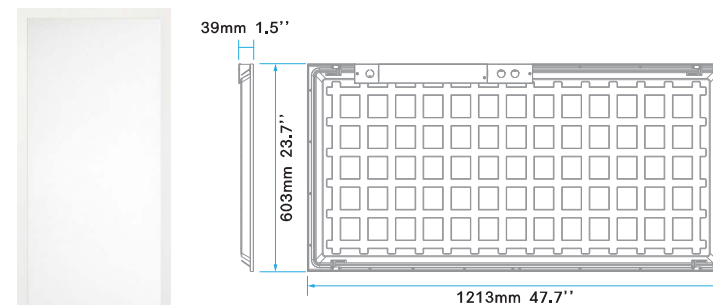

2X4ft

WATTAGE SELECTABLE
40W | 50W | 60W

3 COLOR SELECTABLE
3500K | 4000K | 5000K

BRIGHTNESS
4400/5500/6600 LUMENS

DIMMABLE
0-10V

Product Model
QK-BPLA-2*4-40W-60W-C-XXX-XX



Single Color | 120° | CRI 80 | LIFE 50,000 | 5 YEARS WARRANTY | 120-347V

Product Model
QK-BPLA-2*4-40W-60W-3C-XXX-XX



3 CCT | 120° | CRI 80 | LIFE 50,000 | 5 YEARS WARRANTY | 120-347V




LED LINEAR STRIP LIGHT

LED LINEAR STRIP LIGHT

2FT

BRIGHTNESS
170 LUMENS/W

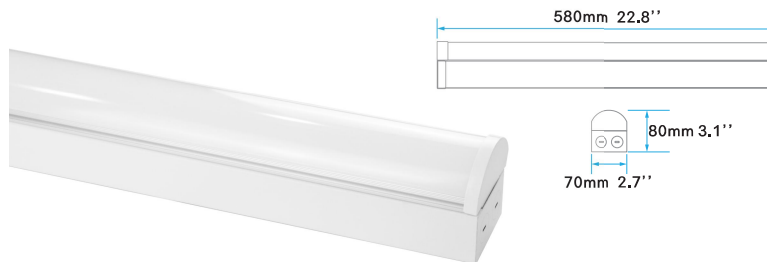

Product Model

QK-ST4-2FT30W-XXK



LED LINEAR STRIP LIGHT - 3 CCT & 3 WATTAGE SELECT

2FT

WATTAGE SELECTABLE
10W | 20W | 30W

3 COLOR SELECTABLE
3500K | 4000K | 5000K

BRIGHTNESS
170 LUMENS/W

DIMMABLE
0-10V




Product Model

QK-ST4-2FT30W-CCT



LED LINEAR STRIP LIGHT

LED LINEAR STRIP LIGHT

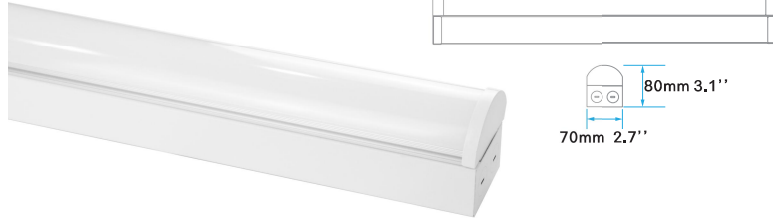

4FT

BRIGHTNESS
170 LUMENS/W

Product Model
QK-ST4-4FT60W-XXK



Single Color
120°
CRI 80
LIFETM 50,000
5 YEARS WARRANTY
120-347V
40W

LED LINEAR STRIP LIGHT - 3 CCT & 5 WATTAGE SELECT



4FT

WATTAGE SELECTABLE
30W, 35W, 40W, 50W, 60W

3 COLOR SELECTABLE
3500K 4000K 5000K

BRIGHTNESS
170 LUMENS/W

DIMMABLE
0-10V


Product Model
QK-ST4-4FT60W-CCT



120°
CRI 80
LIFETM 50,000
5 YEARS WARRANTY
120-347V

LED LINEAR STRIP LIGHT

LED LINEAR STRIP LIGHT



8FT


BRIGHTNESS
170 LUMENS/W

Product Model
QK-ST4-8FT80W-XXK



Single Color
120°
CRI 80
LIFETM 50,000
5 YEARS WARRANTY
120-347V
80W

LED LINEAR STRIP LIGHT - 3 CCT & 5 WATTAGE SELECT



8FT

WATTAGE SELECTABLE
60W, 70W, 80W

3 COLOR SELECTABLE
3500K 4000K 5000K

BRIGHTNESS
170 LUMENS/W

DIMMABLE
0-10V

Product Model
QK-ST4-8FT80W-CCT



120°
CRI 80
LIFETM 50,000
5 YEARS WARRANTY
120-347V



T5 INTEGRATED TUBE LIGHT

T5 INTEGRATED TUBE LIGHT - 5 CCT SELECT




5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K



T5 INTEGRATED TUBE LIGHT

SIZE

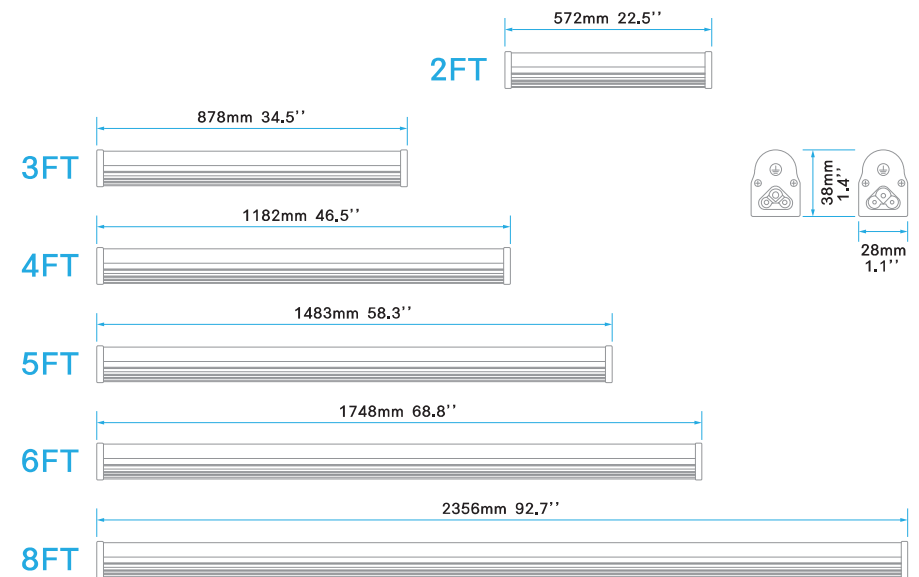

PRODUCT PARAMETER

SIZE	MODEL	INPUT VOLTS	WATTAGE	LUMEN
1FT	QK-T5DL300-4W	AC 120-277	5W	480
2FT	QK-T5DL600-7W	AC 120-277	10W	840
3FT	QK-T5DL900-12W	AC 120-277	15W	1440
4FT	QK-T5DL1200-15W	AC 120-277	20W	2400
5FT	QK-T5DL1500-20W	AC 120-277	25W	2400
6FT	QK-T5DL1800-22W	AC 120-277	30W	2640
8FT	QK-T5DL2400-30W	AC 120-277	40W	3600




T8 INTEGRATED TUBE LIGHT

T8 INTEGRATED TUBE LIGHT - 5 CCT SELECT




5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K



T8 INTEGRATED TUBE LIGHT

SIZE

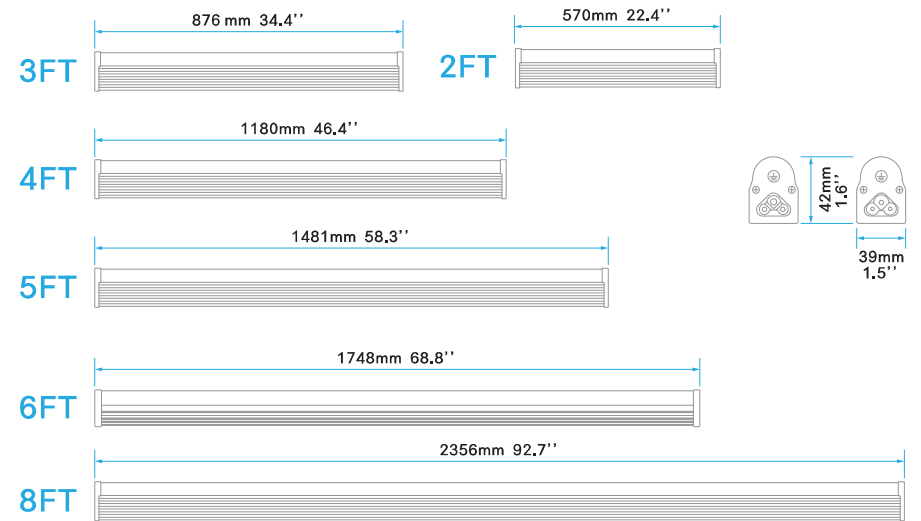


PRODUCT PARAMETER

SIZE	MODEL	INPUT VOLTS	WATTAGE	LUMEN
2FT	QK-T85DL600-10W	AC 120-277	10W	840
3FT	QK-T8DL900-15W	AC 120-277	15W	1440
4FT	QK-T8DL1200-20W	AC 120-277	20W	2400
5FT	QK-T8DL1500-25W	AC 120-277	25W	2400
6FT	QK-T8DL1800-30W	AC 120-277	30W	3000
8FT	QK-T8DL2400-40W	AC 120-277	40W	3600



WALL PACK LIGHT

80W WALL PACK LIGHT



80W

BRIGHTNESS
125 LUMENS/W


DIMMABL

0-10V

Product Model
QK-WP11GM-80W



100W WALL PACK LIGHT



100W

BRIGHTNESS
125 LUMENS/W


DIMMABL

0-10V

Product Model
QK-WP11GM-100W



120W WALL PACK LIGHT



120W

BRIGHTNESS
125 LUMENS/W

DIMMABL

0-10V


Product Model
QK-WP11GM-120W





UFO HIGHBAY

100W UFO HIGHBAY - 5 CCT SELECT



100W

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
15000 LUMENS

DIMMABL
0-10V

WORKS WITH


SMART SENSOR US RINGS US HOOK

Product Model
QKUFO-100W



UFO HIGHBAY

150W UFO HIGHBAY - 5 CCT SELECT



150W

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
22500 LUMENS

DIMMABL
0-10V


WORKS WITH

SMART SENSOR US RINGS US HOOK

Product Model
QKUFO-150W



200W UFO HIGHBAY - 5 CCT SELECT



200W

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
30000 LUMENS

DIMMABL
0-10V

WORKS WITH


SMART SENSOR US RINGS US HOOK

Product Model
QKUFO-200W



UFO HIGHBAY

240W UFO HIGHBAY - 5 CCT SELECT



240W

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
36000 LUMENS

DIMMABL
0-10V


WORKS WITH

SMART SENSOR US RINGS US HOOK

Product Model
QKUFO-240W



320W UFO HIGHBAY - 5 CCT SELECT



320W

5 COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

BRIGHTNESS
45000 LUMENS

DIMMABL
0-10V


WORKS WITH

SMART SENSOR US RINGS US HOOK

Product Model
QKUFO-320W



100W AREA LIGHT



100W

3 COLOR SELECTABLE

3500K 4000K 5000K

BRIGHTNESS
13000 LUMENS

DIMMABL
0-10V


Product Model
QK-SL0810-100W



AREA LIGHT

AREA LIGHT

150W AREA LIGHT

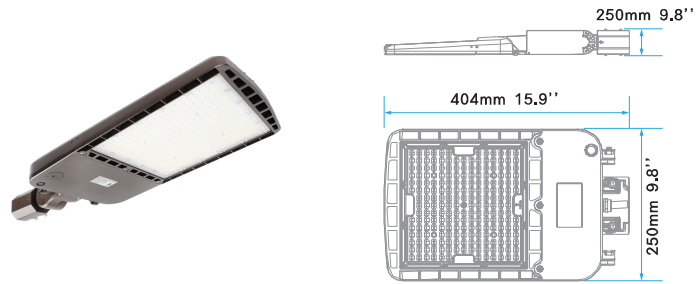

150W

3 COLOR SELECTABLE

3500K 4000K 5000K

BRIGHTNESS
19500 LUMENS


DIMMABL
0-10V

Product Model
QK-SL0815-150W



AREA LIGHT

240W AREA LIGHT

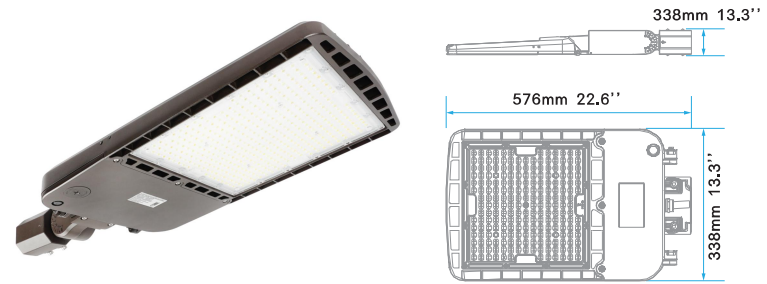

240W

3 COLOR SELECTABLE

3500K 4000K 5000K


BRIGHTNESS
31200 LUMENS

DIMMABL
0-10V

Product Model
QK-SL0824-240W



200W AREA LIGHT

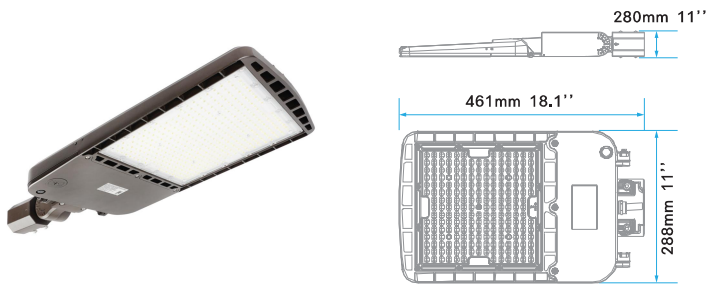

200W

3 COLOR SELECTABLE

3500K 4000K 5000K


BRIGHTNESS
26000 LUMENS

DIMMABL
0-10V

Product Model
QK-SL0820-200W



300W AREA LIGHT

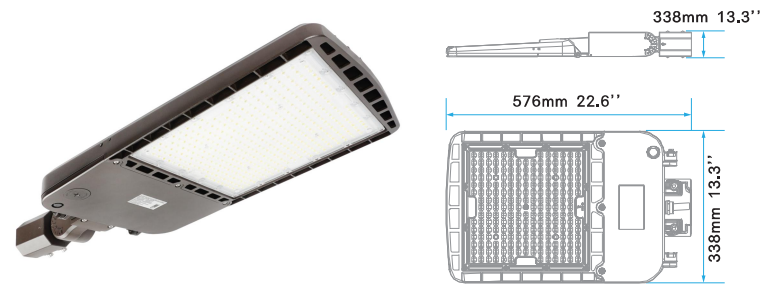

300W

3 COLOR SELECTABLE

3500K 4000K 5000K

BRIGHTNESS
39000 LUMENS

DIMMABL
0-10V

Product Model
QK-SL0830-300W





EC MATERIALS

**TABLE
OF
CONTENTS**



INDOOR LIGHTING

LED Slim Panel Light Series	01-04
Anti-glare Downlight Series	05-07
Commercial Downlight Series	08-10
Gimbal Downlight Series	11-20
LED Modular Downlight Series	21-23
LED Linear Recessed Downlight Series	24-26



OUTDOOR LIGHTING

LED Wall Light Series	27-40
LED Landscape Light Series	41-48
LED Hardscape Light Series	49-54

LED SLIM PANEL LIGHT SERIES

Smart dimming



4" & 6"



APP CONTROL



VOICE CONTROL



GROUP CONTROL



APP DIMMER



MUSIC SYNC



16 MILLION COLORS



COOL & WARM



TIMER

KEY FEATURES

Ultra Slim Led Panel Light

- * 1/2" Thin: fits in tight ceiling space.
- * Air tight & IC rated: for insulated ceiling.
- * Suitable for damp locations.
- * Fast & easy installation: save labor cost.
- * No housing required.
- * 5CCT tunable.

2700K
3000K
3500K
4000K
5000K



Dimensions



Trim Color



White



Brushed Nickel



Black

Junction Box

3"



Triac Dimmable
120V AC

4" & 6" & 8"



SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-TZ03-T7W-5CCT	120V AC Dimmable	7W	500LM	5CCT Tunable	Ø 70MM	85X11.5MM
JXL-TZ04-T10W-5CCT	120V AC Dimmable	10W	700LM	5CCT Tunable	Ø 108MM	122X11.5MM
JXL-TZ04-T12W-5CCT	120V AC Dimmable	12W	1100LM	5CCT Tunable	Ø 108MM	122X11.5MM
JXL-TZ06-T12W-5CCT	120V AC Dimmable	12W	1100LM	5CCT Tunable	Ø 158MM	173X11.5MM
JXL-TZ06-T15W-5CCT	120V AC Dimmable	15W	1500LM	5CCT Tunable	Ø 158MM	173X11.5MM
JXL-TA08-T18W-5CCT	120V AC Dimmable	18W	1600LM	5CCT Tunable	Ø 208MM	223X11.5MM
JXL-CA03-T07W-5CCT	120V AC Dimmable	7W	500LM	5CCT Tunable	Ø 70MM	85X11.5MM
JXL-CA04-T10W-5CCT	120V AC Dimmable	10W	900LM	5CCT Tunable	Ø 108MM	122X11.5MM
JXL-CA06-T12W-5CCT	120V AC Dimmable	12W	1100LM	5CCT Tunable	Ø 158MM	173X11.5MM
JXL-CA08-T25W-5CCT	120V AC Dimmable	25W	2000LM	5CCT Tunable	Ø 208MM	223X11.5MM



2700K
3000K
3500K
4000K
5000K



KEY FEATURES


Ultra Slim Led Panel Light

- * 1/2" Thin: fits in tight ceiling space.
- * Air tight & IC rated: for insulated ceiling.
- * Suitable for damp locations.
- * Fast & easy installation: save labor cost.
- * No housing required.
- * 5CCT tunable.


Dimensions



Junction Box



Flat (TZ Series)
3" & 4" & 6" & 8"

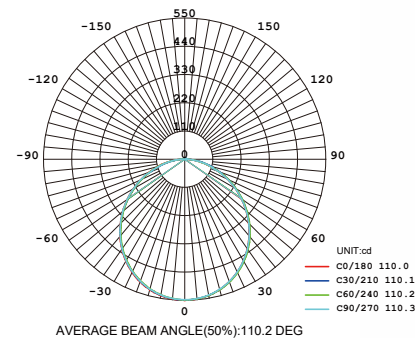


KEY FEATURES


Ultra Slim Led Panel Light

- * Wi-Fi & bluetooth connected to smart tuya App, compatible with Alexa and Google Assistant..
- * Brightness & color temperature dimmable RGB +C +W , 16 million colors.
- * Voice control & group control & timer.
- * Memory function & music sync.

16 Million colors can be easily constructed



Flat (TZ Series)
4" & 6"



Baffle (CA Series)
4" & 6"

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-TZ04-T10W-RGBCW	120V AC Dimmable	10W	600LM	RGBCW	Ø 108MM	122X11.5MM
JXL-TZ06-T12W-RGBCW	120V AC Dimmable	12W	850LM	RGBCW	Ø 158MM	173X11.5MM
JXL-CA04-T10W-RGBCW	120V AC Dimmable	10W	600LM	RGBCW	Ø 108MM	122X11.5MM
JXL-CA06-T12W-RGBCW	120V AC Dimmable	12W	850LM	RGBCW	Ø 158MM	173X11.5MM



Dimensions




Junction Box




ANTI-GLARE DOWNLIGHT SERIES




- 2700K
- 3000K
- 3500K
- 4000K
- 5000K



Smooth
2" & 4" & 6"



Baffle
2" & 4" & 6"



SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-COB02-R9W-5CCT	120V AC Dimmable	9W	650LM	5CCT Tunable	Ø 70MM	80X67MM
JXL-COB04-R12W-5CCT	120V AC Dimmable	12W	1000LM	5CCT Tunable	Ø 108MM	122X77MM
JXL-COB04-R15W-5CCT	120V AC Dimmable	15W	1200LM	5CCT Tunable	Ø 108MM	122X77MM
JXL-COB06-R18W-5CCT	120V AC Dimmable	18W	1500LM	5CCT Tunable	Ø 140MM	180X85MM
JXL-COB06-R20P-5CCT	100-277V AC Dimmable	10/15/20W Power Selectable	1800LM	5CCT Tunable	Ø 140MM	180X85MM


KEY FEATURES

- ★ 5CCT Tunable, 27K/30K/35K/40K/50K in one fixture.
- ★ Voltage: 100-130V AC , triac dimming.
- ★ CRI 90+ , beam angle 36° degree.
- ★ Anti-glare design, no harm to eyes.
- ★ Airtight & IC rated, no housing required.
- ★ Suitable for damp locations.
- ★ Having smooth & baffle design for choice, easy DIY change the design.

Trim Color



Junction Box

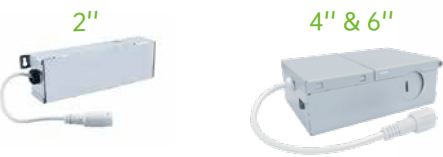

KEY FEATURES

- ★ 5CCT Tunable, 27K/30K/35K/40K/50K in one fixture.
- ★ Voltage: 100-130V AC , triac dimming.
- ★ CRI 90+ , beam angle 36° degree.
- ★ Anti-glare design, no harm to eyes.
- ★ Airtight & IC rated, no housing required.
- ★ Suitable for damp locations.
- ★ Having smooth & baffle design for choice, easy DIY change the design.

Trim Color





Junction Box




SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-COB02-S9W-5CCT	120V AC Dimmable	9W	650LM	5CCT Tunable	Ø 70MM	80X80X57MM
JXL-COB04-S12W-5CCT	120V AC Dimmable	12W	1000LM	5CCT Tunable	Ø 108MM	122X122X64MM
JXL-COB04-S15W-5CCT	120V AC Dimmable	15W	1200LM	5CCT Tunable	Ø 108MM	122X122X64MM
JXL-COB06-S18W-5CCT	120V AC Dimmable	18W	1500LM	5CCT Tunable	Ø 140MM	173X173X85MM
JXL-COB06-S20P-5CCT	100-277V AC Dimmable	10/15/20W Power Selectable	1800LM	5CCT Tunable	Ø 140MM	173X173X85MM


- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

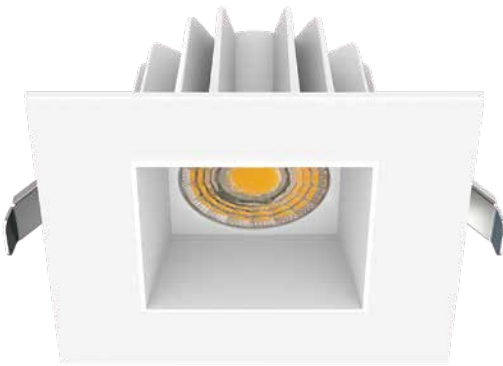

Smooth
2" & 4" & 6"



Baffle
2" & 4" & 6"

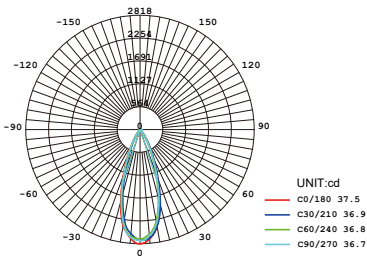




2700K
3000K
3500K
4000K
5000K



KEY FEATURES

- * Featured narrow frame and deep low glare design.
- * High CRI>90 with optical lens, accurate color representation.
- * Durable Aluminium material with metal spring.
- * 5CCT in One design, ETL listed.

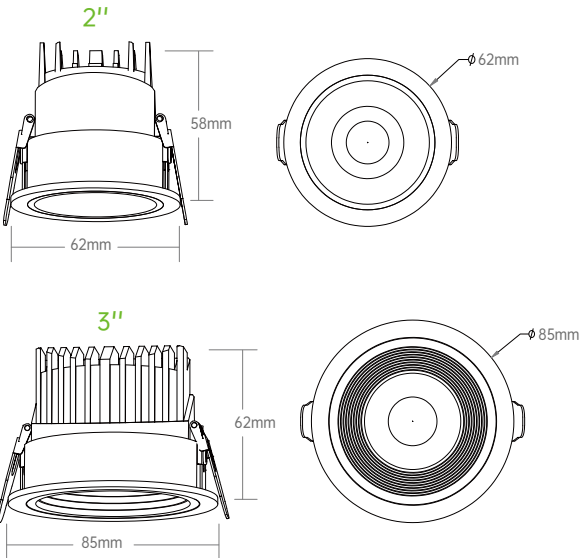

Beam Angle



Junction Box



SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-COB02-T05W-5CCT	120V AC Dimmable	5W	400LM	5CCT Tunable	Ø 54MM	62X58MM
JXL-COB03-T09W-5CCT	120V AC Dimmable	9W	700LM	5CCT Tunable	Ø 76MM	85X62MM

COMMERCIAL DOWNLIGHT SERIES

KEY FEATURES

- * Architectural design, commercial grade quality.
- * Direct lighting design with high illuminance.
- * Anti-glare design, without hosting.
- * 5CCT tunable & power selectable.




Beam Angle



Junction Box

4" & 6" & 8"

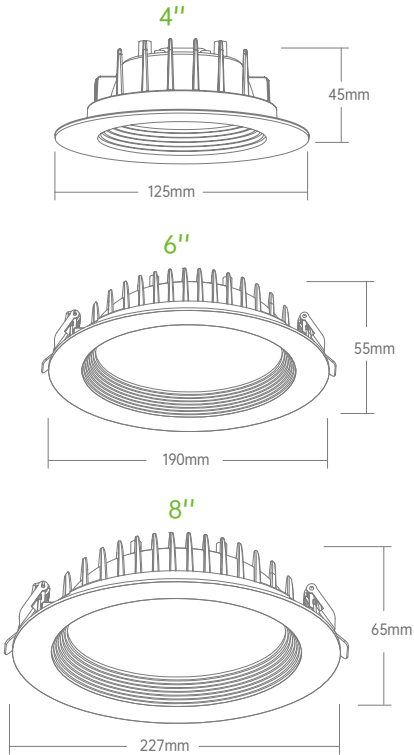

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-TE04-T15W-5CCT	AC100-277V	9W/12W/15W	950LM	5CCT Tunable	Ø 102MM	125X45MM
JXL-TE06-T20W-5CCT	AC100-277V	10W/15W/20W	1600LM	5CCT Tunable	Ø 165MM	190X55MM
JXL-TE08-T25W-5CCT	AC100-277V	15W/20W/25W	2000LM	5CCT Tunable	Ø 195MM	227X65MM




4 IN 1

UGR <19


2700K
3000K
3500K
4000K
5000K

COB 0-10V & Triac Dimming
Power Selectable & 5CCT Tunable

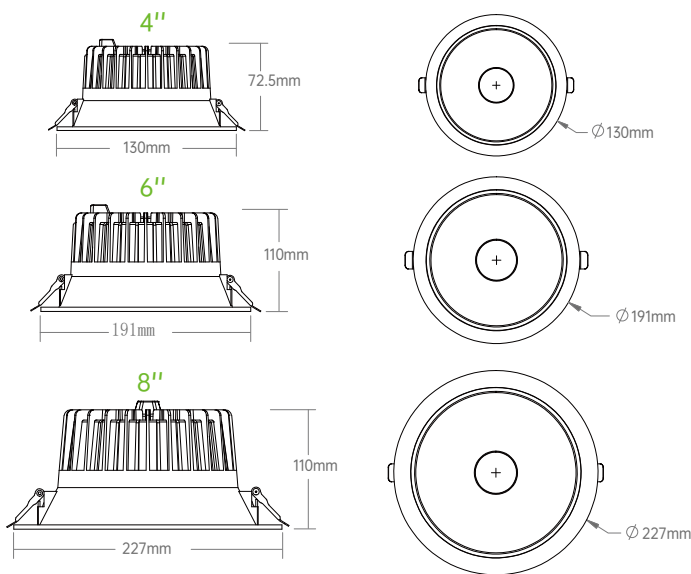

Junction Box

4" & 6" & 8"



SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-COB04-F15W-41	AC100-277V	9W/12W/15W	1200LM	5CCT Tunable	Ø 108MM	130X72.5MM
JXL-COB06-F28W-41	AC100-277V	18W/23W/28W	2000LM	5CCT Tunable	Ø 165MM	191X110MM
JXL-COB08-F38W-41	AC100-277V	28W/33W/38W	2800LM	5CCT Tunable	Ø 195MM	227X110MM

KEY FEATURES

- * Premium reflector with anodic oxidation treatment, and accurate beam angle.
- * Unique structure ensure product high end and gorgeous design.
- * Die-casting aluminum heat sink, better heat radiation, ensure the performance and long life span.
- * High performance & brightness LED chip, CRI>90Ra.
- * 0-10V & triac dimming in one fixture.
- * Power selectable & 5CCT tunable.

KEY FEATURES

- * Premium reflector with anodic oxidation treatment, and accurate beam angle.
- * Unique structure ensure product high end and gorgeous design.
- * Die-casting aluminum heat sink, better heat radiation,ensure the performance and long life span.
- * span.
- * High performance & brightness LED chip.
- * 0-10V & triac dimming in one fixture.
- Power selectable & 5CCT tunable.



4 IN 1

UGR <19



2700K
3000K
3500K
4000K
5000K

SMD 0-10V & Triac Dimming
Power Selectable & 5CCT Tunable



Junction Box

4" & 6" & 8"

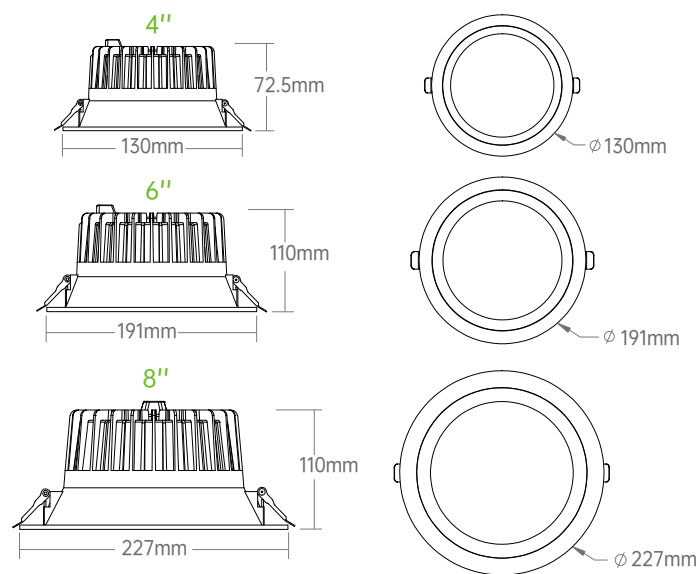

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-SMD04-E15W-41	AC100-277V	9W/12W/15W	1200LM	5CCT Tunable	Ø 108MM	130X72.5MM
JXL-SMD06-E28W-41	AC100-277V	18W/23W/28W	2000LM	5CCT Tunable	Ø 165MM	191X110MM
JXL-SMD08-E38W-41	AC100-277V	28W/33W/38W	2800LM	5CCT Tunable	Ø 195MM	227X110MM



GIMBAL DOWNLIGHT SERIES



2700K
3000K
3500K
4000K
5000K



COB

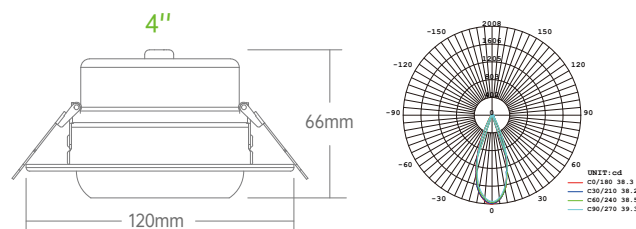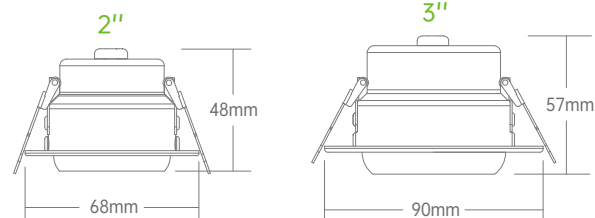


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-COB02B-T05W-5CCT	120V AC Dimmable	5W	450LM	5CCT Tunable	Ø 57MM	68X48MM
JXL-COB03B-T07W-5CCT	120V AC Dimmable	7W	650LM	5CCT Tunable	Ø 78MM	90X57MM
JXL-COB04B-T12W-5CCT	120V AC Dimmable	12W	1000LM	5CCT Tunable	Ø 108MM	120X66MM

KEY FEATURES

- ★ Vertical rotation angle: 30 degrees.
- ★ Ideal for high ceiling and focused area illumination.
- ★ Features high-brightness COB chip and external driver with durable aluminium material.
- ★ 5CCT selectable in one fixture, 5%-100% triac dimmable.
- ★ Easy installation and user-friendly.

Function

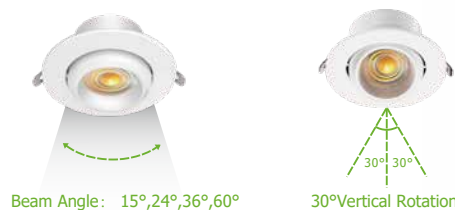

Beam Angle: 15°,24°,36°,60°

30°Vertical Rotation

Trim Color



White

Black

Nickel

Junction Box



2" & 3"

4"

Triac Dimmable
120V AC

KEY FEATURES

- ★ Vertical rotation angle: 30 degrees.
- ★ Ideal for high ceiling and focused area illumination.
- ★ Features high-brightness SMD chip and external driver with durable aluminium material.
- ★ 5CCT selectable in one fixture, 5%-100% triac dimmable.
- ★ Easy installation and user-friendly.

2700K
3000K
3500K
4000K
5000K



SMD

Function



100°Beam Angle

30°Vertical Rotation

Trim Color



White

Black

Junction Box



2" & 3"

4" & 6"

Triac Dimmable
120V AC

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-SMD02-T05W-5CCT	120V AC Dimmable	5W	400LM	5CCT Tunable	Ø 57MM	68X42MM
JXL-SMD03-T07W-5CCT	120V AC Dimmable	7W	550LM	5CCT Tunable	Ø 78MM	90X48MM
JXL-SMD04-T12W-5CCT	120V AC Dimmable	12W	1000LM	5CCT Tunable	Ø 108MM	120X54MM
JXL-SMD06-T15W-5CCT	120V AC Dimmable	15W	1350LM	5CCT Tunable	Ø 158MM	180X52MM





2700K
3000K
3500K
4000K
5000K

KEY FEATURES

- * Regressed LED gimbal downlight, low glare design.
- * High CRI provides true color rendering in area of illumination.
- * 5 color temperature in one.
- * Air-tight, IC-rated and suitable for damp location.



Function

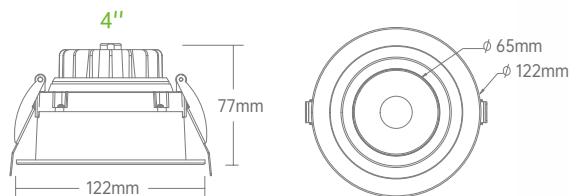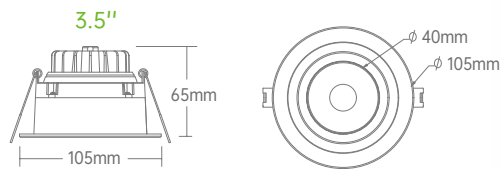

Junction Box



SPECIFICATION



Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-EB03-RR09W-5CCT	120V AC Dimmable	9W	700LM	5CCT Tunable	Ø 80MM	105X65MM
JXL-EB04-RR15W-5CCT	120V AC Dimmable	15W	1200LM	5CCT Tunable	Ø 108MM	122X77MM

KEY FEATURES

- * Regressed LED gimbal downlight, low glare design.
- * High CRI provides true color rendering in area of illumination.
- * 5 color temperature in one.
- * Air-tight, IC-rated and suitable for damp location.



Function

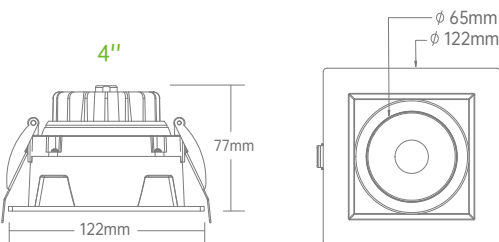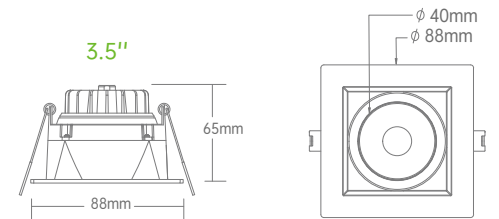

Junction Box





SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-EB03-RS09W-5CCT	120V AC Dimmable	9W	700LM	5CCT Tunable	Ø 80MM	88X88X65MM
JXL-EB04-RS15W-5CCT	120V AC Dimmable	15W	1200LM	5CCT Tunable	Ø 108MM	122X122X77MM




2700K
3000K
3500K
4000K
5000K

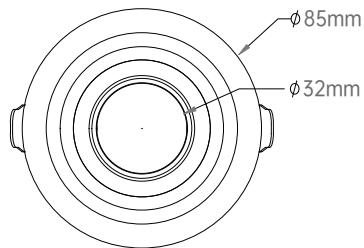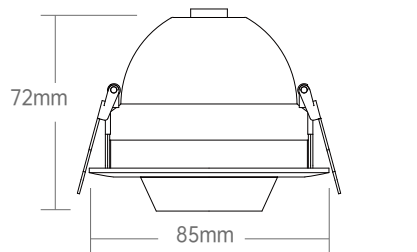

KEY FEATURES

- ★ Featured 55° anti-glare angle gimbal recessed eyeball downlight.
- ★ 355° horizontal rotation and a vertical tilt of 25°, ideal for focus illumination.
- ★ Narrow edge design, better decorative effect.
- ★ Air-tight, IC-rated and suitable for damp location.

Function

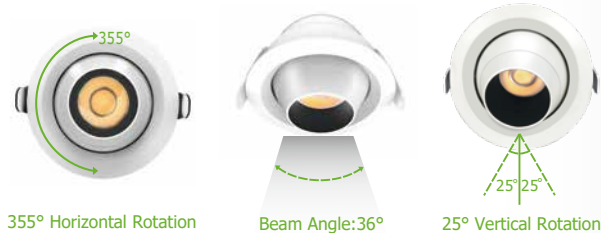

Junction Box




KEY FEATURES

- ★ Featured 55° anti-glare angle gimbal recessed eyeball downlight.
- ★ 355° horizontal rotation and a vertical tilt of 25°, ideal for focus illumination.
- ★ Narrow edge design, better decorative effect.
- ★ Air-tight, IC-rated and suitable for damp location.



2700K
3000K
3500K
4000K
5000K



Function

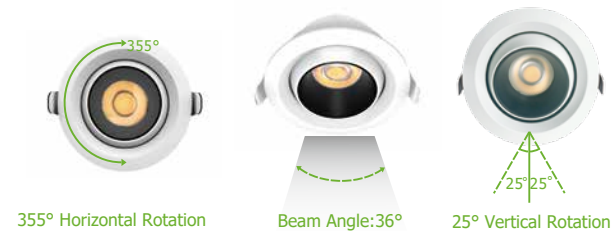

Junction Box

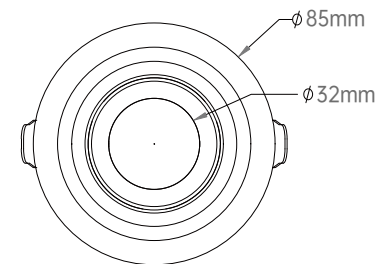

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-COB03-B09W-5CCT	120V AC Dimmable	9W	600LM	5CCT Tunable	Ø 75MM	85X72MM

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-COB03-A09W-5CCT	120V AC Dimmable	9W	600LM	5CCT Tunable	Ø 75MM	85X60MM




2700K
3000K
3500K
4000K
5000K

KEY FEATURES







- ★ 360°degree gimbal adjustment, switch lighting angles at will.
- ★ Ideal for higher ceilings or focused area illumination.
- ★ External driver, easy to install, user friendly.
- ★ 5CCT selectable in one fixture.
- ★ 5%-100% triac dimmable.



Function



Junction Box



KEY FEATURES

- ★ 360°degree gimbal adjustment, switch lighting angles at will.
- ★ Ideal for higher ceilings or focused area illumination.
- ★ External driver, easy to install, user friendly.
- ★ 5CCT selectable in one fixture.
- ★ 5%-100% triac dimmable.

2700K
3000K
3500K
4000K
5000K



Function



360° Horizontal Rotation






38° Beam Angle



30° Vertical Rotation

Junction Box

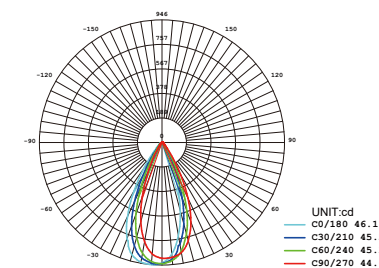

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-ZF03-T07W-5CCT	120V AC Dimmable	7W	650LM	5CCT Tunable	Ø 75MM	85X52MM

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-EB03-T07W-5CCT	120V AC Dimmable	7W	550LM	5CCT Tunable	Ø 75MM	85X42.5MM
JXL-EB04-T12W-5CCT	120V AC Dimmable	12W	900LM	5CCT Tunable	Ø 102MM	120X63MM
JXL-EB06-T18W-5CCT	120V AC Dimmable	18W	1500LM	5CCT Tunable	Ø 158MM	190X80MM



SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-FG0207W-5CCT	120V AC Dimmable	7W	600LM	5CCT Tunable	Ø 70MM	90X30MM
JXL-FG0309W-5CCT	120V AC Dimmable	9W	700LM	5CCT Tunable	Ø 90MM	110X32MM
JXL-FG0410W-5CCT	120V AC Dimmable	10W	900LM	5CCT Tunable	Ø 102MM	125X35MM
JXL-FG0615W-5CCT	120V AC Dimmable	15W	1200LM	5CCT Tunable	Ø 140MM	175X38MM
JXL-FG02M1-5CCT	120V AC Dimmable	7W	600LM	5CCT Tunable	Ø 70MM	90X90X30MM
JXL-FG04M1-5CCT	120V AC Dimmable	10W	900LM	5CCT Tunable	Ø 102MM	125X125X35MM
JXL-FG02M2-5CCT	120V AC Dimmable	14W	1200LM	5CCT Tunable	150X80MM	165X90X30MM
JXL-FG04M2-5CCT	120V AC Dimmable	20W	1600LM	5CCT Tunable	204X102MM	230X125X35MM
JXL-FG02M3-5CCT	120V AC Dimmable	20W	1800LM	5CCT Tunable	230X80MM	240X90X30MM

KEY FEATURES


Floating gimbal downlight

- * Adjustable directional lighting at 90° tilt and 360° rotation.
- * Bright Illumination with 5CCT selectable.
- * IC rated and air tight design, easy for installation.
- * More option: Round, Square and Multi-heads for option.

Function



Junction Box

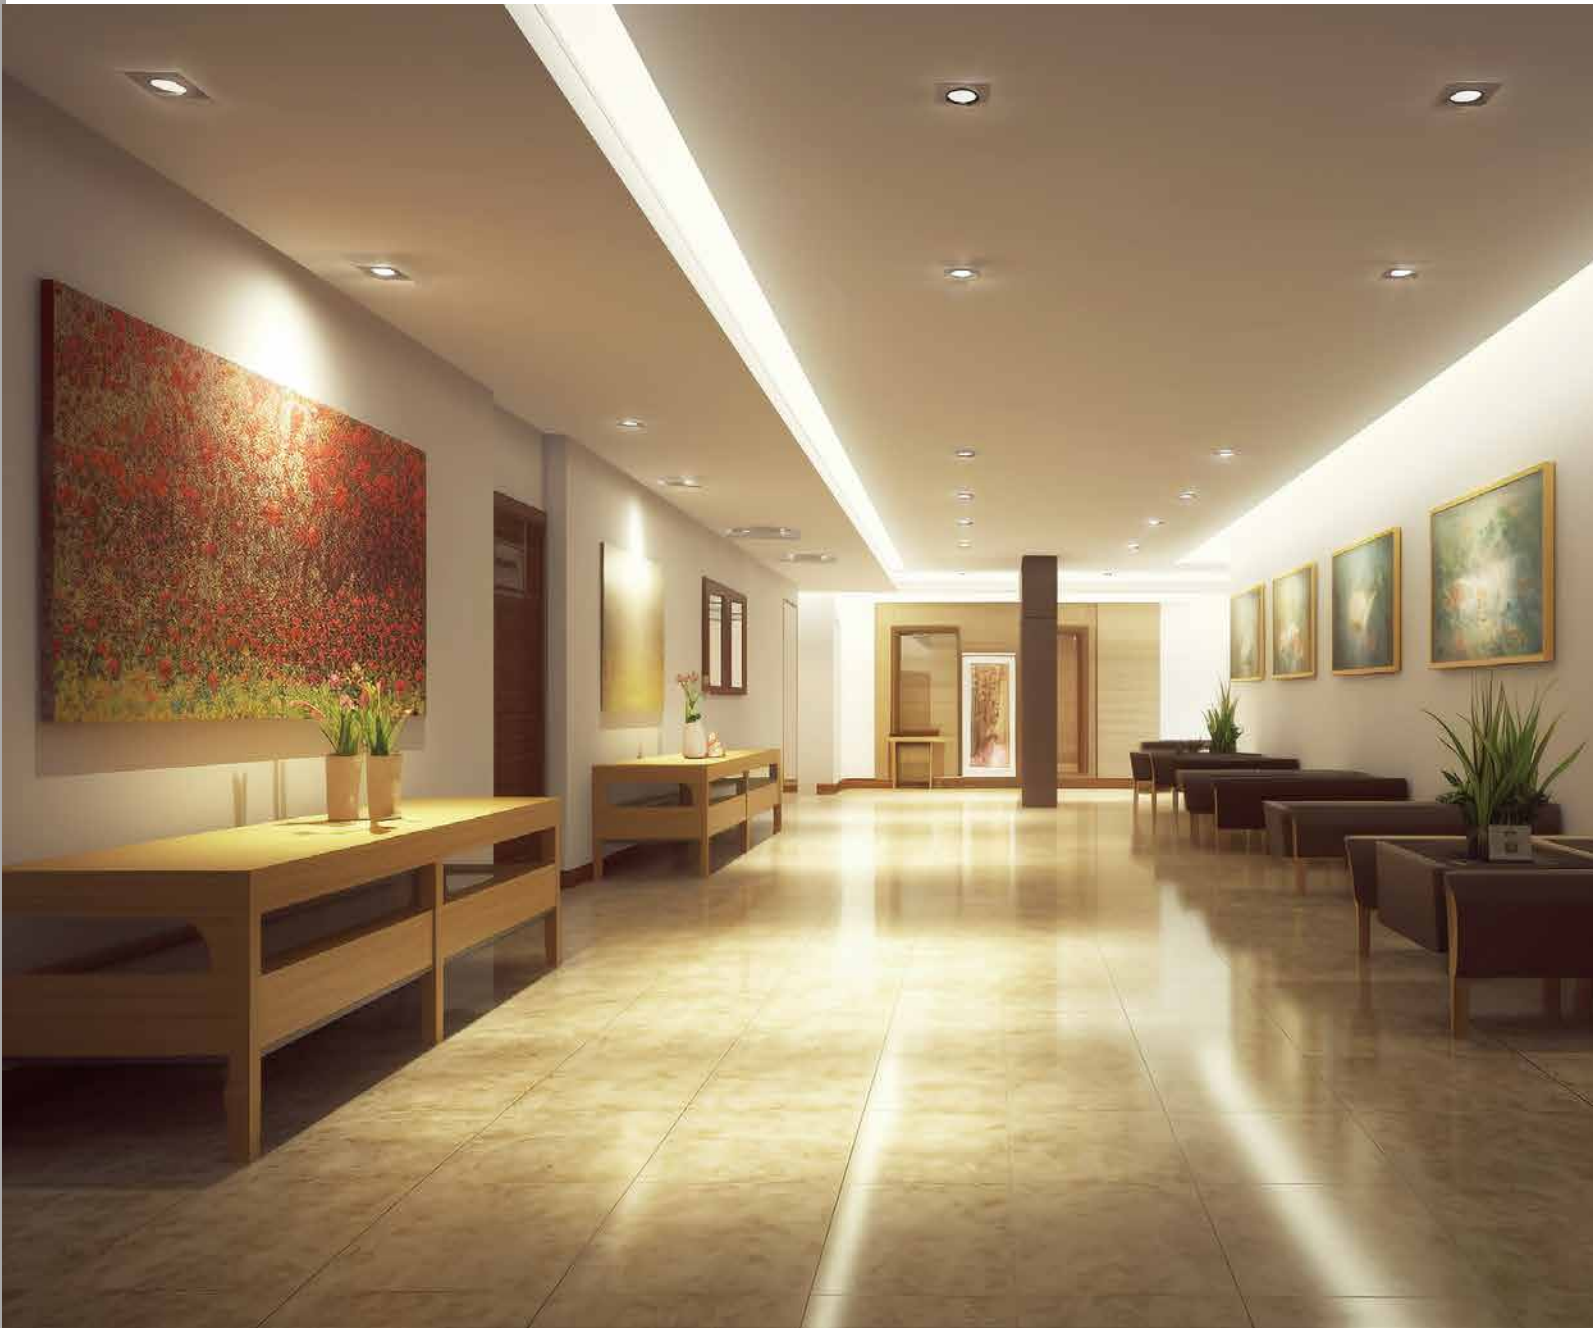

LED MODULAR DOWN LIGHT

KEY FEATURES

- * Each light engine compatible with multiple trim,each trim with multicolor.
- * Low profile design ,minimal heat emission.
- * Triac dimmable & type IC rated: no housing required.



Open 3" 4" Trim A



Pin Hole 3" 4" Trim B



Slot 3" 4" Trim C




SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Trim A/Trim B/Trim C (3")	Trim A/Trim B/Trim C (4")
JXL-C0804-T10W-5CCT	120V AC Dimmable	10W	800LM	5CCT Tunable	83X93MM	125X103MM

KEY FEATURES

- * Each light engine compatible with multiple trim,each trim with multicolor.
- * Low profile design ,minimal heat emission.
- * Suitable For Different Light Source.
- * Durable Aluminium Material Housing.
- * Features Anti-glare Design.



SPECIFICATION


Model		Voltage		Waterproof Rating		CCT	
JXL-C0804-T10W-5CCT		120V AC Dimmable		Damp Location		5CCT Tunable	
EBR	WTR (Cutout Size)	EBM1	WTM1 (Cutout Size)	EBM2	WTM2 (Cutout Size)	EBM3	WTM3 (Cutout Size)
3"	85X30MM (77MM)	85X85X30MM	(77X77MM)	170X85X30MM	(160X77MM)	252X85X30MM	(244X77MM)
4"	112X42MM (95MM)	112X112X42MM	(95X95MM)	210X112X42MM	(95X195MM)	282X112X42MM	(95X265MM)







2700K
3000K
3500K
4000K
5000K

KEY FEATURES

- * Round or square LED trimless downlight with integral driver in connection box.
- * Twist-lock design, easy replacement.
- * 30 degree tilt swivel design.
- * Low profile design ,minimal heat emission.

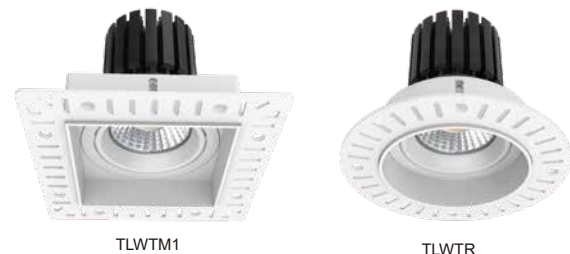

TWIST-LOCK DESIGN

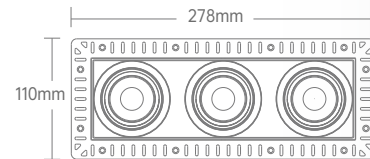

SPECIFICATION

Model	Voltage	Waterproof Rating	CCT
JXL-C0804-T10W-5CCT	120V AC Dimmable	Damp Location	5CCT Tunable
TLWTR (Cutout Size)	TLWTM1 (Cutout Size)	TLWTM2 (Cutout Size)	TLWTM3 (Cutout Size)
110X89MM (83MM)	110X110X89MM (83X83MM)	195X110X89MM (162X83MM)	278X110X89MM (246X83MM)

LED LINEAR RECESSED DOWN LIGHT



2700K
3000K
3500K
4000K
5000K

KEY FEATURES



- * Trimless Design blends into all ceilings, creating a clean sleek look,
- * Push in installation, easy replacement.
- * Beam angle of 15°/24°/36° available.
- * High CRI 90, with true color rendering.




Options (5 Cells & 10 Cells)



Junction Box

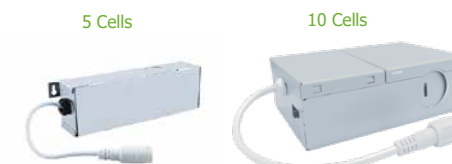

JXL-TXH05-TL10W-5CCT

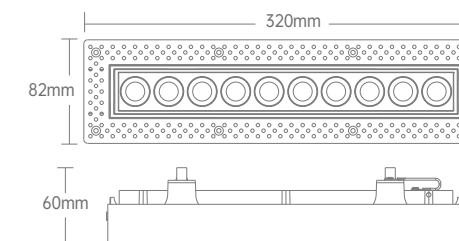

JXL-TXH10-TL20W-5CCT

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-TXH05-TL10W-5CCT	120V AC Dimmable	10W	660LM	5CCT Tunable	154X49MM	186X82X60MM
JXL-TXH10-TL20W-5CCT	120V AC Dimmable	20W	1200LM	5CCT Tunable	286X49MM	320X82X60MM




JXL-TXH05-G16W-5CCT



JXL-TXH01-GR03W-5CCT

JXL-TXH01-GS03W-5CCT

JXL-TXH02-G06W-5CCT

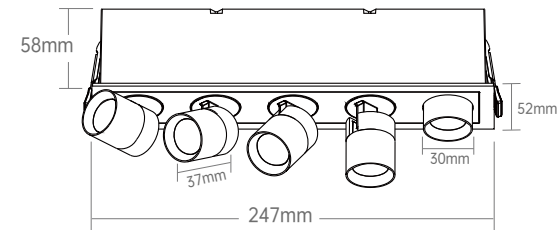


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-TXH01-GR03W-5CCT	120V AC Dimmable	3W	200LM	5CCT Tunable	Ø 55MM	58X52MM
JXL-TXH01-GS03W-5CCT	120V AC Dimmable	3W	200LM	5CCT Tunable	50X50MM	58X54X58MM
JXL-TXH02-G06W-5CCT	120V AC Dimmable	6W	600LM	5CCT Tunable	125X45MM	132X52X58MM
JXL-TXH05-G16W-5CCT	120V AC Dimmable	16W	1200LM	5CCT Tunable	240X45MM	247X52X58MM

KEY FEATURES

- * Mutiple pull-out spot light design, 355° horizontal rotation and a vertical tilt of 90°.
- * Narrow edge design, better decorative effect.
- * Die-cast aluminum body and heat sink ensure a long lifespan.
- * Air-tight, IC-rated and suitable for damp location.


Function

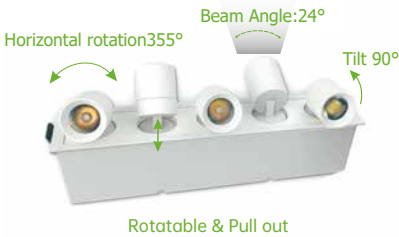

Options




Junction Box

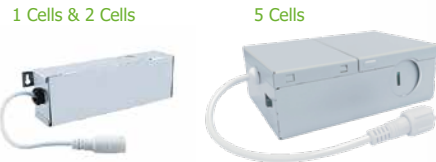


KEY FEATURES

- * Prized for classic good looks, performance and flexibility.
- * Beam angle of 15°/30°/45° available.
- * High CRI 90, with true color rendering.
- * UGR : The innovative black anti-glarscreen defines emission with luminance control low UGR.
- * Wider trim, easier installation.




JXL-TXH05-T11W-5CCT

Options (5 Cells & 10 Cells)

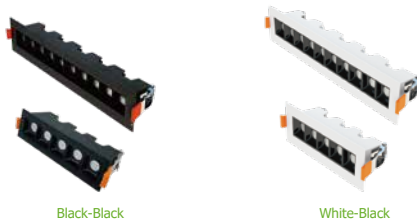


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	Cutout Size	Dimension(DxH)
JXL-TXH05-T11W-5CCT	120V AC Dimmable	11W	700LM	5CCT Tunable	139X36MM	163X60X50MM
JXL-TXH10-T18W-5CCT	120V AC Dimmable	18W	1200LM	5CCT Tunable	272X36MM	296X60X50MM

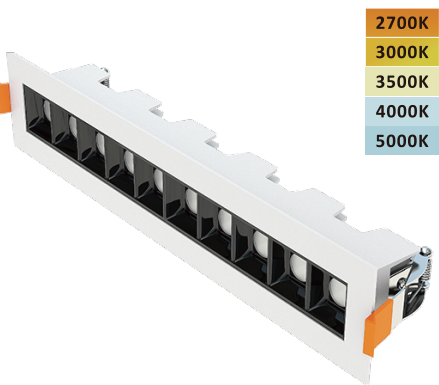

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

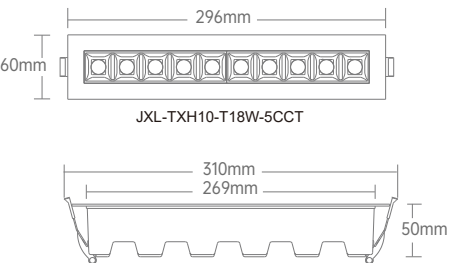

JXL-TXH10-T18W-5CCT

Junction Box



Triac Dimmable
120V AC

LED WALL LIGHT SERIES






14"




8"




JXL-BD08-WM15W-5CCT

KEY FEATURES


- * Modern & stylish design.
- * Double layer Japan imported high quality PC cover, anti-impact, anti-UV & anti-oxidant.
- * 5CCT selectable or RGB+C+W.
- * Photocell sensor for choice.



01



02

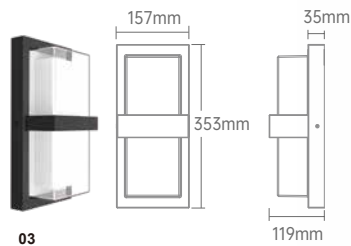

03

SPECIFICATION


Model	Voltage	Wattage	Lumens	CCT	CRI	Dimension
JXL-BD14-WM22W-5CCT-XX	AC100-277V	22W	1900LM	5CCT Tunable	80	157X353MM
JXL-BD14-WM22W-RGBCW-XX	AC100-277V	22W	1900LM	RGBCW	80	157X353MM
JXL-BD14-WM22W-D2D-XX	AC100-277V	22W	1900LM	5CCT + Dusk to Dawn	80	157X353MM
JXL-BD08-WM15W-5CCT	AC100-277V	15W	1200LM	5CCT Tunable	80	160X113MM

KEY FEATURES


- * Contemporary and stylish design.
- * Impact-resistant, anti-UV, anti-oxidant layer of high-quality PC cover.
- * 5CCT selectable or RGB+C+W.
- * Photocell sensor for choice.




12"



01



02



03

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Dimension
JXL-BD12-WM15W-5CCT-XX	AC100-277V	15W	1200LM	5CCT Tunable	80	126X310MM
JXL-BD12-WM18W-RGBCW-XX	AC100-277V	18W	1200LM	RGBCW	80	126X310MM
JXL-BD12-WM15W-D2D-XX	AC100-277V	15W	1200LM	5CCT + Dusk to Dawn	80	126X310MM

14"



10"



KEY FEATURES

- * Premium bubble glass and aluminum housing for modern style.
- * Weather-resistant materials rated for wet locations.
- * Compatible with an E26 bulb, easy to maintain.
- * Easy installation, perfect for garage, porch, patio, or walkways.




Black




ORB


E26 Bulb

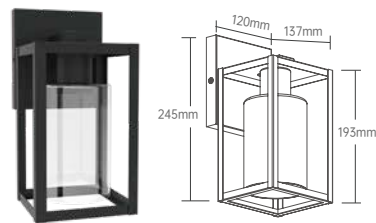

JXL-BD10-RM-XX

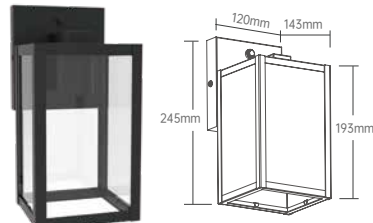

JXL-BD10-RN-XX

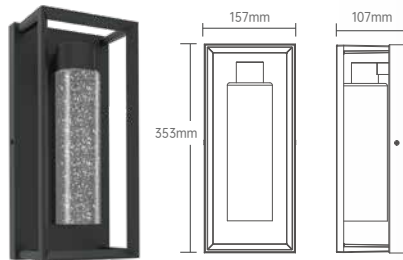

JXL-BD14-RM-XX

SPECIFICATION

Model	Power Source	Max Bulb Wattage	Waterproof	Dimension
JXL-BD10-RM-XX	Hardwired	60W	Wet location	245X120X137MM
JXL-BD10-RN-XX	Hardwired	60W	Wet location	245X120X143MM
JXL-BD14-RM-XX	Hardwired	60W	Wet location	353X157X107MM

KEY FEATURES

- * 5CCT tunable easy to keep inventory.
- * IP65 waterproof design.
- * Anti-rust & anti-corrosion aluminum & tempered glass cover to withstand bad conditions.
- * Photocell sensor version for choice.



Downward



Integrated light source




or


LED Bulbs (not included)




Up & Down




JXL-BD90-R12W-5CCT



JXL-BD90-R18W-5CCT
JXL-BD90-R18W-RGBCW



JXL-BD108-R12W-5CCT



JXL-BD108-R24W-5CCT


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-BD90-R12W-5CCT	AC100-277V	12W	1100LM	5CCT Tunable	80	65°	192X90X157MM
JXL-BD90-R18W-5CCT	AC100-277V	18W	1600LM	5CCT Tunable	80	65°	305X90X157MM
JXL-BD108-R12W-5CCT	AC100-277V	12W	1100LM	5CCT Tunable	80	65°	202X108X175MM
JXL-BD108-R24W-5CCT	AC100-277V	24W	1800LM	5CCT Tunable	80	65°	356X108X175MM
JXL-BD90-R18W-RGBCW	AC100-277V	24W	1800LM	RGBCW	80	65°	305X90X157MM



KEY FEATURES

- * Adjustable 5CCT or RGB+CW mode.
- * IP65 waterproof design.
- * Anti-rust & anti-corrosion aluminum, withstand outdoor conditions.
- * Acrylic lamp shade.

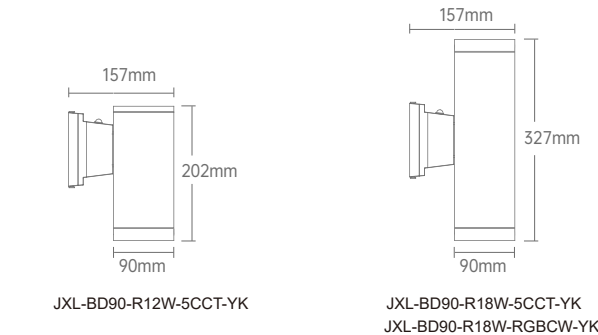


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-BD90-R12W-5CCT-YK	AC100-277V	12W	1000LM	5CCT Tunable	80	65°	202X90X157MM
JXL-BD90-R18W-5CCT-YK	AC100-277V	18W	1600LM	5CCT Tunable	80	65°	327X90X157MM
JXL-BD90-R18W-RGBCW-YK	AC100-277V	18W	1600LM	RGBCW	80	65°	327X90X157MM

KEY FEATURES

- * 5CCT tunable easy to keep inventory.
- * Built-in with photocell sensor, automatically turn on at dusk and off at dawn.
- * IP65 waterproof design.
- * Anti-rust & anti-corrosion aluminum & tempered glass cover to withstand outdoor bad conditions.





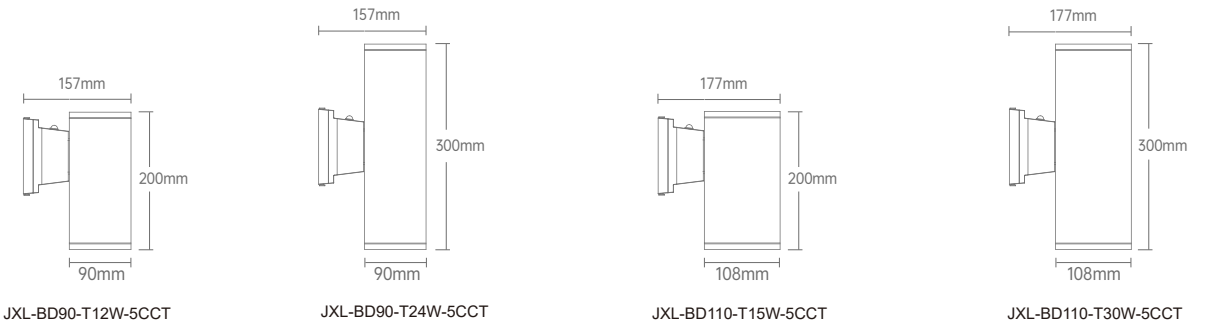


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-BD90-T12W-5CCT	AC100-277V	12W	1000LM	5CCT Tunable	80	60°	200X90X157MM
JXL-BD90-T24W-5CCT	AC100-277V	24W	2000LM	5CCT Tunable	80	60°	300X90X157MM
JXL-BD110-T15W-5CCT	AC100-277V	15W	1350LM	5CCT Tunable	80	60°	200X108X177MM
JXL-BD110-T30W-5CCT	AC100-277V	30W	2700LM	5CCT Tunable	80	60°	300X108X177MM

KEY FEATURES

- * 5CCT tunable easy to keep inventory.
- * Modern & stylish design.
- * IP65 waterproof design.
- * Anti-rust & anti-corrosion aluminum withstand outdoor bad conditions.

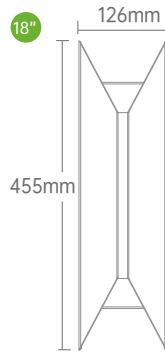

JXL-BD08-T12W-5CCT

JXL-BD14-T15W-5CCT

JXL-BD14-T22W-5CCT

JXL-BD12-MZ24W-5CCT-14

JXL-BD12-MZ24W-5CCT-18

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-BD08-T12W-5CCT	AC100-277V	12W	800LM	5CCT Tunable	80	65°	203X126X86MM
JXL-BD14-T15W-5CCT	AC100-277V	15W	1000LM	5CCT Tunable	80	65°	356X126X82MM
JXL-BD14-T22W-5CCT	AC100-277V	22W	1600LM	5CCT Tunable	80	65°	356X126X82MM
JXL-BD12-MZ24W-5CCT-14	AC100-277V	24W	1600LM	5CCT Tunable	80	65°	356X126X82MM
JXL-BD12-MZ24W-5CCT-18	AC100-277V	24W	1600LM	5CCT Tunable	80	65°	455X126X82MM

KEY FEATURES

- * 5CCT tunable easy to keep inventory.
- * Patent design,with separate light engine can be stock the light engine, up & down light. and the cover separately to multiple models.
- * IP65 waterproof design.
- * Anti-rust & anti-corrosion aluminum & metal withstand outdoor bad conditions.




Up & Down




Black




stainless steel




JXL-BD-FT-24W-5CCT




JXL-BD-RA-T24W-5CCT



JXL-BD-FT-24W-5CCT-01



JXL-BD-RA-T24W-5CCT-01




JXL-BD-RB-T24W-5CCT

SPECIFICATION


Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-BD-FT-24W-5CCT	AC100-277V	24W	1600LM	5CCT Tunable	80	65°	127X72X300MM
JXL-BD-FT-24W-5CCT-01	AC100-277V	24W	1600LM	5CCT Tunable	80	65°	127X72X300MM
JXL-BD-RA-T24W-5CCT	AC100-277V	24W	1600LM	5CCT Tunable	80	65°	127X72X300MM
JXL-BD-RA-T24W-5CCT-01	AC100-277V	24W	1600LM	5CCT Tunable	80	65°	127X72X300MM
JXL-BD-RB-T24W-5CCT	AC100-277V	24W	1600LM	5CCT Tunable	80	65°	127X72X245MM




Up & Down



JXL-BD06-MZ12W-5CCT-Q

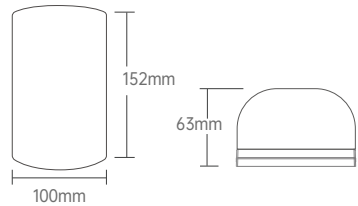

JXL-BD06-MZ12W-5CCT-R

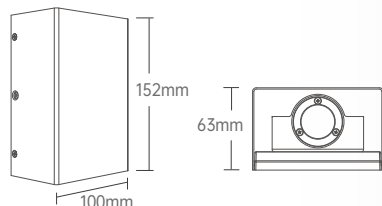

JXL-BD06-MZ12W-5CCT-S

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-BD06-MZ12W-5CCT-Q	AC100-277V / 12-24V	12W	600LM	5CCT Tunable	80	65°	100X152X63MM
JXL-BD06-MZ12W-5CCT-R	AC100-277V / 12-24V	12W	600LM	5CCT Tunable	80	65°	100X152X63MM
JXL-BD06-MZ12W-5CCT-S	AC100-277V / 12-24V	12W	600LM	5CCT Tunable	80	65°	100X152X63MM

KEY FEATURES

- * Modern & stylish design, up & down light.
- * 5CCT selectable, IP65 waterproof design.
- * Anti-rust & anti-corrosion aluminum & tempered PC cover to withstand outdoor bad conditions.

KEY FEATURES

- * Modern & stylish design, up & down light.
- * High Quality Wall Sconce & Easy to Install.
- * Built-in LED Beads with an average lifespan of 50,000 hours.
- * Double output light has high light transmittance, soft lighting and care of eyes health.
- * Applied both indoor and outdoor.



Trim Color



Black



White



Black



White

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-BD08-SM12W-5CCT	AC100-277V	12W	900LM	5CCT Tunable	80	100°	210X116X95MM
JXL-BD08-SF12W-5CCT	AC100-277V	12W	900LM	5CCT Tunable	80	100°	210X116X60MM
JXL-BD08-SM12W-RGBCW	AC100-277V	12W	900LM	RGBCW	80	100°	210X116X95MM
JXL-BD08-SF12W-RGBCW	AC100-277V	12W	900LM	RGBCW	80	100°	210X116X60MM


Up & Down





Bulb
or




Integrated light source



JXL-BD08-SM12W-5CCT
JXL-BD08-SM12W-RGBCW




JXL-BD08-SF12W-5CCT
JXL-BD08-SF12W-RGBCW



KEY FEATURES

- ★ 5CCT tunable or RGBCW.
- ★ Modern & stylish design with IP65 waterproof.
- ★ Material : aluminum + steel +PC
- ★ Anti-rust & anti-corrosion aluminum material with UV resistant surface treatment.
- ★ Photocell sensor version for choice.

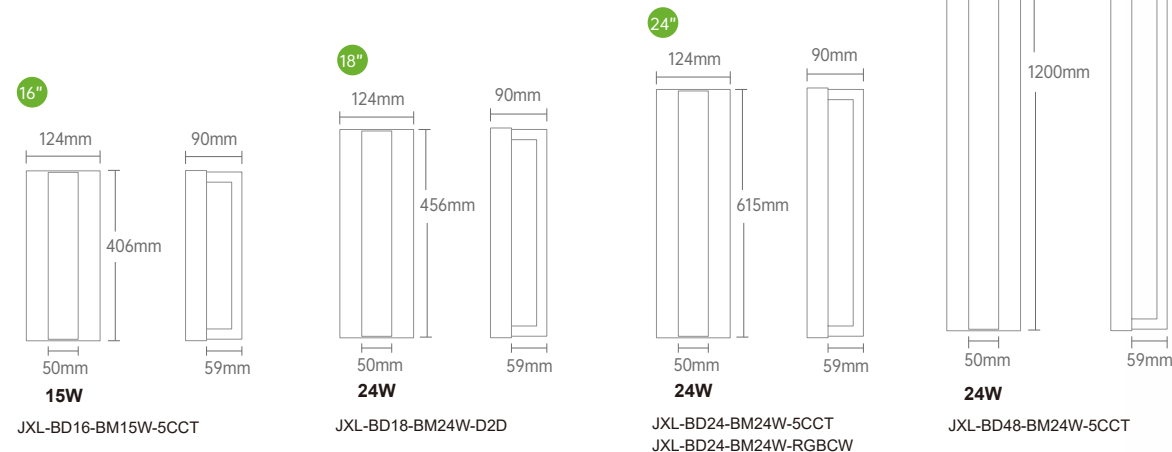


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Dimension
JXL-BD16-BM15W-5CCT	AC100-277V	15W	500LM	5CCT Tunable	80	406X124X90MM
JXL-BD24-BM24W-5CCT	AC100-277V	24W	700LM	5CCT Tunable	80	615X124X90MM
JXL-BD48-BM24W-5CCT	AC100-277V	24W	900LM	5CCT Tunable	80	1200X124X90MM
JXL-BD24-BM24W-RGBCW	AC100-277V	24W	700LM	RGBCW	80	615X124X90MM
JXL-BD18-BM24W-D2D	AC100-277V	24W	650LM	5CCT Tunable	80	456X124X90MM

KEY FEATURES

- ★ Premium bubble glass and aluminium housing for stylish style.
- ★ Constructed with IP65 waterproof rating for wet application.
- ★ Integrated 5CCT selectable LED light, energy savings.
- ★ Perfect decoration for porch, patio, yard, living room, bedrooms, hotel rooms etc.

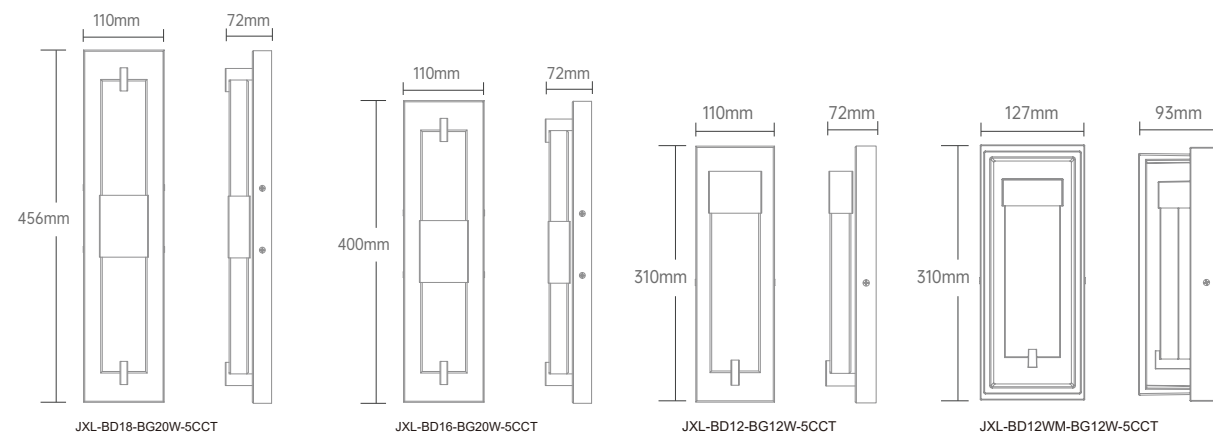

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Dimension
JXL-BD18-BG20W-5CCT	AC 120V	20W	800LM	5CCT Tunable	80	456X110X72MM
JXL-BD16-BG20W-5CCT	AC 120V	20W	800LM	5CCT Tunable	80	400X110X72MM
JXL-BD12-BG12W-5CCT	AC 120V	12W	420LM	5CCT Tunable	80	310X110X72MM
JXL-BD12WM-BG12W-5CCT	AC 120V	12W	420LM	5CCT Tunable	80	310X127X93MM






LED LANDSCAPE LIGHT SERIES

KEY FEATURES

- * Safe landscape lighting low voltage outdoor use.
- * IP65 weather resistant,cast-aluminum construction is good for heat dissipation and prolonged life span.
- * Ideal for patio, deck and garden decoration.
- * ETL listed for safety.

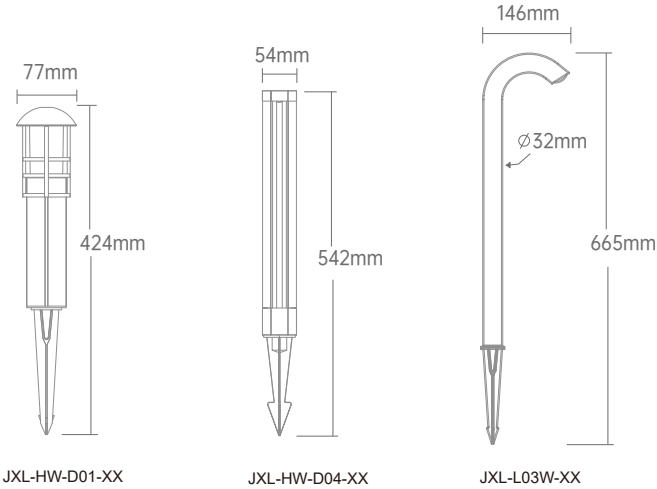


SPECIFICATION


Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-HW-D01-XX	AC/DC12-24V	3W	180LM	3000K-5000K	80	360°	77X424MM
JXL-HW-D04-XX	AC/DC12-24V	4W	150LM	3000K-5000K	80	360°	54X542MM
JXL-L03W-XX	AC/DC12-24V	3W	270LM	3000K-5000K	80	90°	32X146X665MM




or




JXL-HW-D02-XX



JXL-HW-D06-XX



JXL-HW-D05-BLK-XX
JXL-HW-D05-ABB-XX



JXL-SC-D02-XX


KEY FEATURES

- * Safe landscape lighting low voltage outdoor use.
- * Weather resistant, cast-aluminum construction is good for heat dissipation and prolonged life span.
- * Ideal for patio, deck and garden decoration.
- * ETL listed safe for surroundings.




SPECIFICATION


Model	Voltage	Wattage	Lumens	CCT	CRI	Dimension
JXL-HW-D02-XX	AC/DC12-24V	3W	160LM	5CCT Tunable	80	190X527MM
JXL-HW-D06-XX	AC/DC12-24V	3W	160LM	5CCT Tunable	80	188X526MM
JXL-HW-D05-BLK-XX	AC/DC12-24V	3W	160LM	5CCT Tunable	80	190X527MM
JXL-HW-D05-ABB-XX	AC/DC12-24V	3W	160LM	5CCT Tunable	80	190X527MM
JXL-SC-D02-XX	AC/DC12-24V	3W	160LM	5CCT Tunable	80	190X529MM




JXL-HW-S04-5CCT



JXL-HW-S06-5CCT



JXL-HW-S05-5CCT

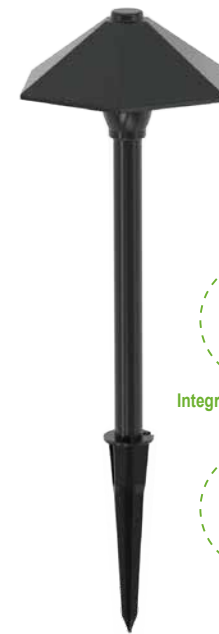

Integrated light source
or



G4 bulb


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Dimension
JXL-HW-S04-5CCT	AC/DC12-24V	3W	160LM	5CCT Tunable	80	157X60X505MM
JXL-HW-S06-5CCT	AC/DC12-24V	3W	160LM	5CCT Tunable	80	157X60X505MM
JXL-HW-S05-5CCT	AC/DC12-24V	3W	160LM	5CCT Tunable	80	150X60X505MM



KEY FEATURES

- ★ Adjustable head up and down in 135 degrees .
- ★ Durable die-casting aluminium fixture body with IP65 waterproof design.
- ★ Low Voltage & Easy Installation.

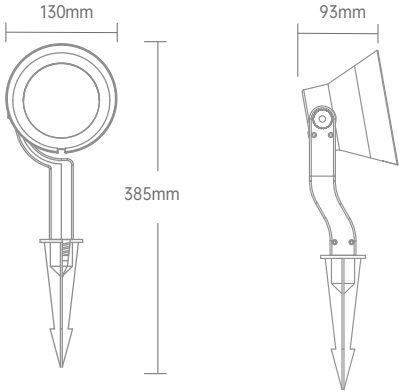

JXL-DD12W-UDN-XX
JXL-DD12W-RGBCW

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-DD12W-UDN-XX	AC/DC12-24V	4W/8W/12W	800LM	3000K	80	65°	385X130X93MM
JXL-DD12W-RGBCW	AC/DC12-24V	12W	800LM	RGBCW	80	65°	385X130X93MM




KEY FEATURES

- ★ Upgrade landscape lighting led light source & super bright.
- ★ AC/DC 12V low output voltage, safe for outdoor use.
- ★ Adjustable pathway lighting fixture,
- ★ 180 degree adjustable bracket.
- ★ Thick aluminum body and glass lens cover design, IP65 waterproof.
- ★ 5CCT available or RGB+CW colour selectable by smart APP.



Integrated light source

MR16 bulb




JXL-HW-D07-XX




JXL-HW-D08-5CCT
JXL-HW-D08-RGBCW




JXL-HW-D03-XX



JXL-HW-B07-XX



JXL-HW-B08-5CCT
JXL-HW-B08-RGBCW



JXL-HW-B03-XX

SPECIFICATION



Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-HW-D07-XX	AC/DC12-24V	5W	450LM	3000K/5000K	80	60°	72X298X101MM
JXL-HW-D08-5CCT(RGBCW)	AC/DC12-24V	12W	1000LM	5CCT(RGBCW)	80	65°	98X327X101MM
JXL-HW-D03-XX	AC/DC12-24V	5W	450LM	3000K/5000K	80	50°	77X298X121MM
JXL-HW-B07-XX	AC/DC12-24V	5W	450LM	3000K/5000K	80	60°	72X152X101MM
JXL-HW-B08-5CCT(RGBCW)	AC/DC12-24V	12W	1000LM	5CCT(RGBCW)	80	65°	98X181X101MM
JXL-HW-B03-XX	AC/DC12-24V	5W	450LM	3000K/5000K	80	50°	72X152X121MM



JXL-HW-D08-RGBCW



JXL-HW-D07-RGBCW

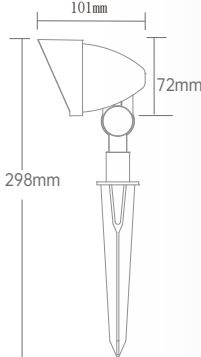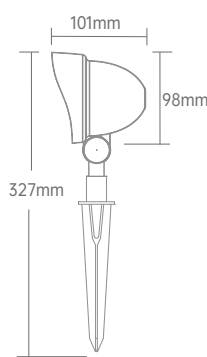

KEY FEATURES



- ★ Upgrade landscape lighting led light source & super bright.
- ★ AC/DC 12-24V low output voltage, safe for outdoor use.
- ★ Adjustable pathway lighting fixture, with 180 degree adjustable bracket.
- ★ Thick aluminum body and glass lens cover design, IP65 waterproof.
- ★ RF remote control: Brightness, color temperature adjustable, RGB+CCT mode.

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-HW-D08-RGBCW	AC/DC12-24V	12W	1000LM	RGBCW	80	60°	327X98X101MM
JXL-HW-D07-RGBCW	AC/DC12-24V	5W	450LM	RGBCW	80	60°	298X72X101MM




LED HARDSCAPE LIGHT SERIES

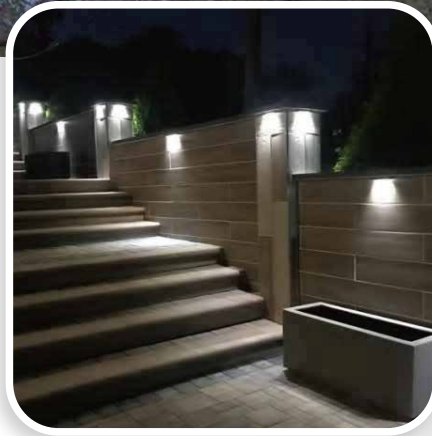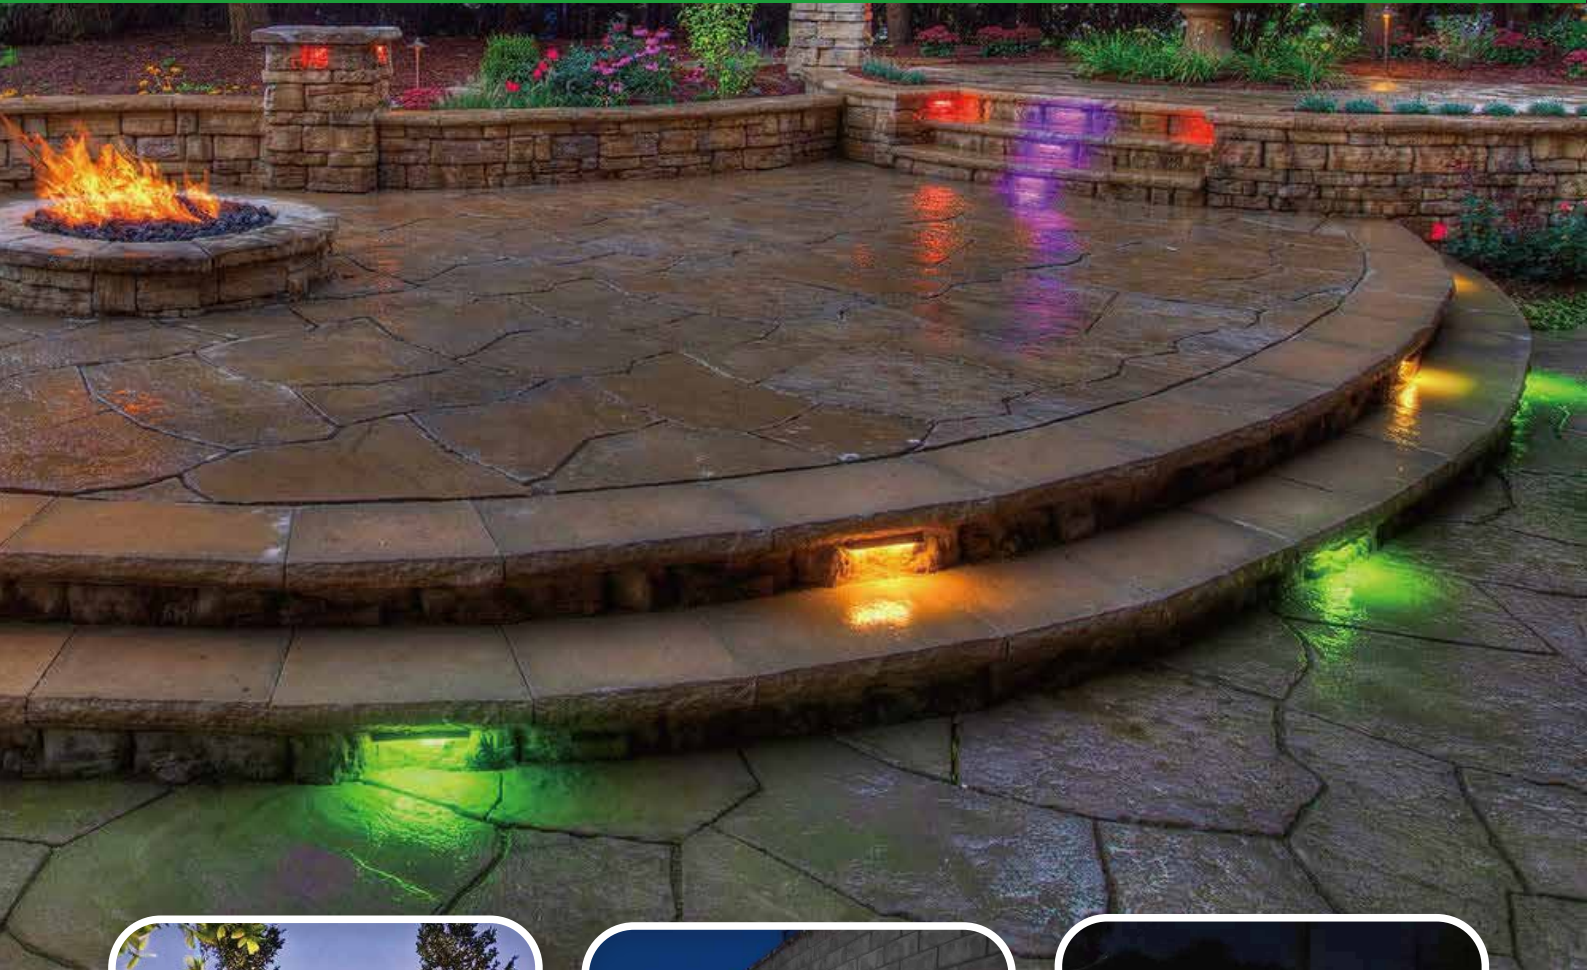


KEY FEATURES

- * With energy-saving LED chips, it has even and comfortable light distribution.
- * Aluminum housing and stainless steel plate protect against corrosion and rust.
- * Rotated 180° up and down that fits more applications.
- * RF remote control & Smart phone control brightness, color temperature adjustable, RGBCW+CCT mode.

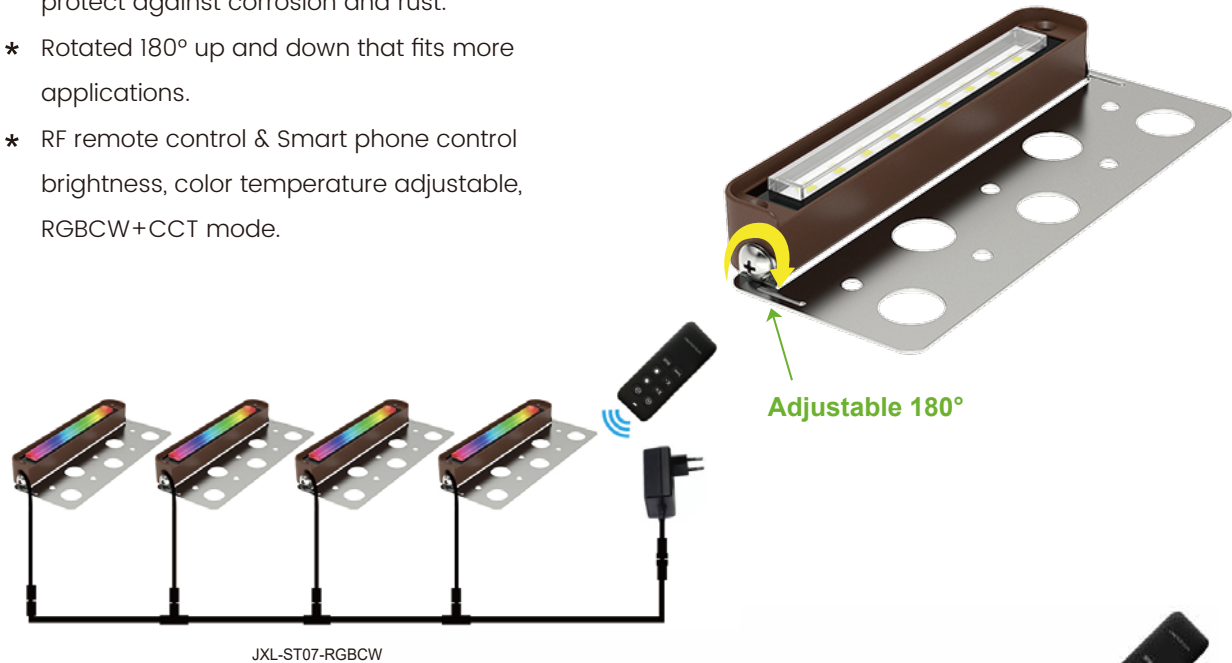


JXL-ST07-RGBCW

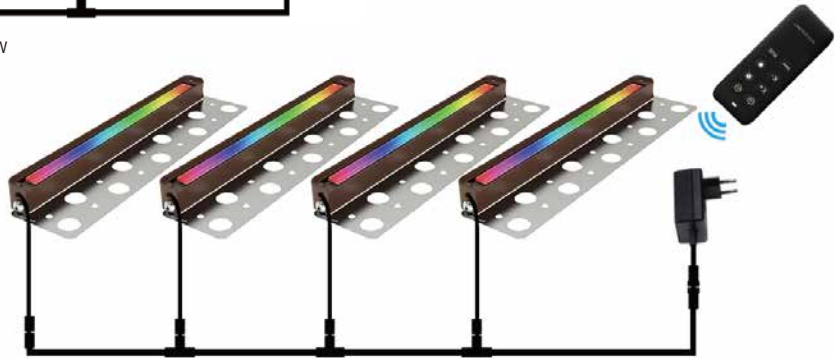

JXL-ST12-RGBCW


SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-ST07-RGBCW	AC/DC12-24V	5W	100LM	RGBCW	80	95°	173X74X23MM
JXL-ST12-RGBCW	AC/DC12-24V	7W	160LM	RGBCW	80	95°	300X74X23MM

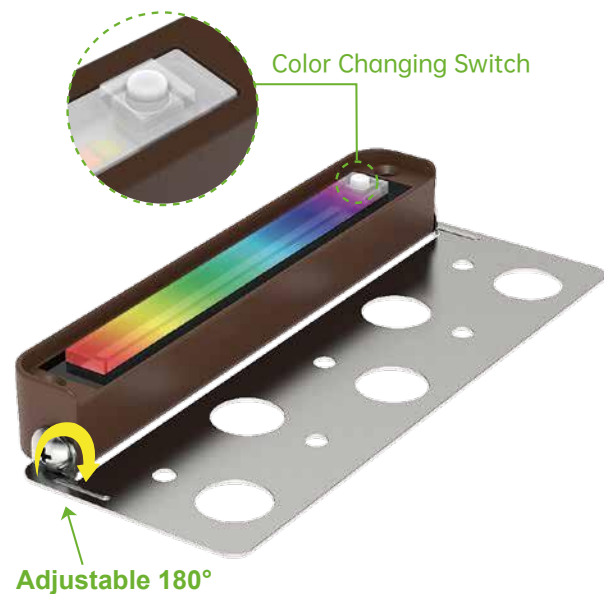

KEY FEATURES

- * With energy-saving LED chips, it has even and comfortable light distribution.
- * 5CCT/RGBW version available.
- * Aluminum housing and stainless steel plate protect against corrosion and rust.
- * Rotated 180° up and down, fits more applications.
- * Tuya smart & button control combined version for choice.

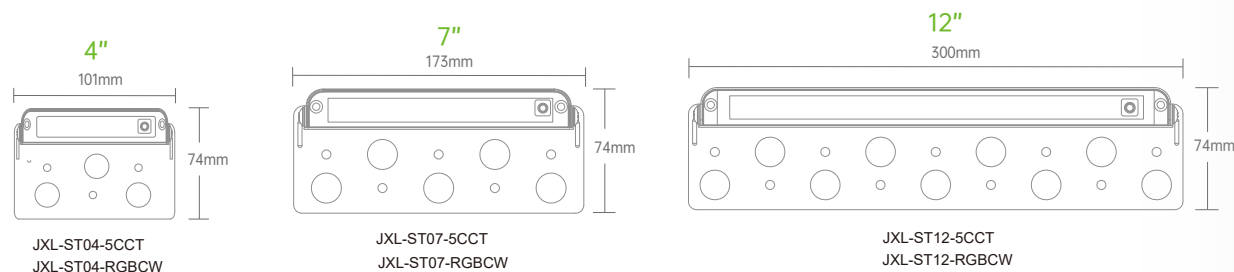

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-ST04-5CCT	AC/DC12-24V	2W	160LM	5CCT Tunable	80+	95°	101X74X23MM
JXL-ST07-5CCT	AC/DC12-24V	4.5W	360LM	5CCT Tunable	80+	95°	173X74X23MM
JXL-ST12-5CCT	AC/DC12-24V	7W	560LM	5CCT Tunable	80+	95°	300X74X23MM
JXL-ST04-RGBCW	AC/DC12-24V	1W	80LM	RGB+C+W	80+	95°	101X74X23MM
JXL-ST07-RGBCW	AC/DC12-24V	3W	100LM	RGB+C+W	80+	95°	173X74X23MM
JXL-ST12-RGBCW	AC/DC12-24V	5W	160LM	RGB+C+W	80+	95°	300X74X25MM


KEY FEATURES


- * L shape hardscape light, perfect for illuminating the corner.
- * Weather Resistance aluminium body and stainless steel pate.
- * 5 selectable color temperature meets different needs.
- * Low voltage input, safety for outdoor application.



SPECIFICATION


Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-SL07-5CCT	AC/DC12-24V	3W	180LM	5CCT	80+	120°	90X90X26MM

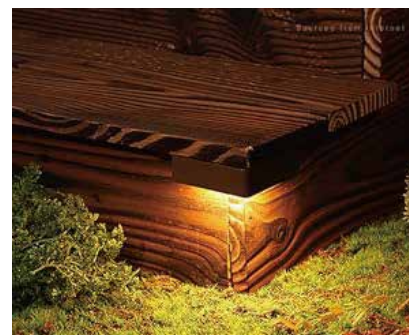

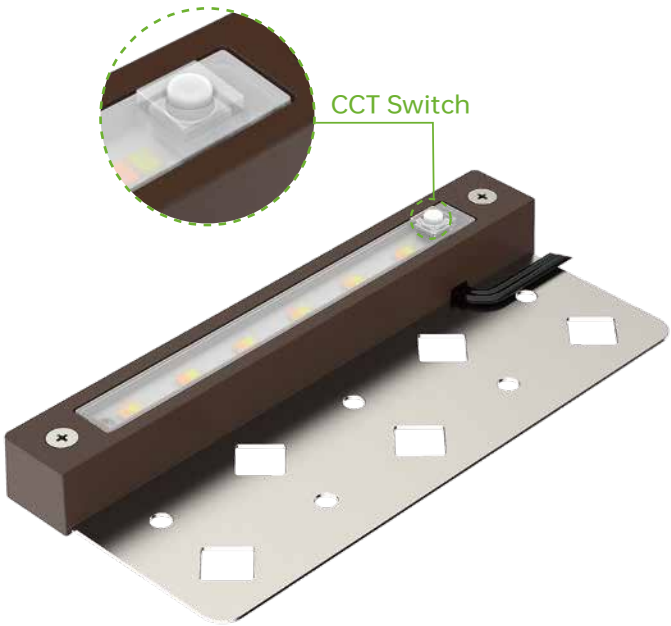


KEY FEATURES


- * Rated as IP65, protected from contact with harmful dust and is suitable for wet areas.
- * Durable powder coated die-cast aluminum housing.
- * Widely use in barbecue fire pits, landscape steps, retaining walls, decks, flowerbeds, and masonry walls.
- * 5CCT selectable.



JXL-ST0403-5CCT



JXL-ST0703-5CCT

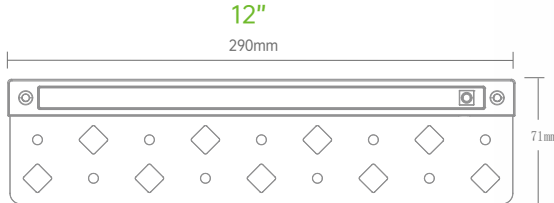

JXL-ST1203-5CCT

SPECIFICATION


Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-ST0403-5CCT	AC/DC12-24V	1.5W	120LM	5CCT Tunable	80+	110°	90X71X17MM
JXL-ST0703-5CCT	AC/DC12-24V	3W	270LM	5CCT Tunable	80+	110°	162X71X17MM
JXL-ST1203-5CCT	AC/DC12-24V	5W	450LM	5CCT Tunable	80+	110°	290X71X17MM

KEY FEATURES




- * Color selectable simply by touch switch on the light.
- * Replaceable light bar, easy for maintenance.
- * Weather Resistance metal body and stainless steel pate.
- * Low voltage input, safety for outdoor application.



Touch switch

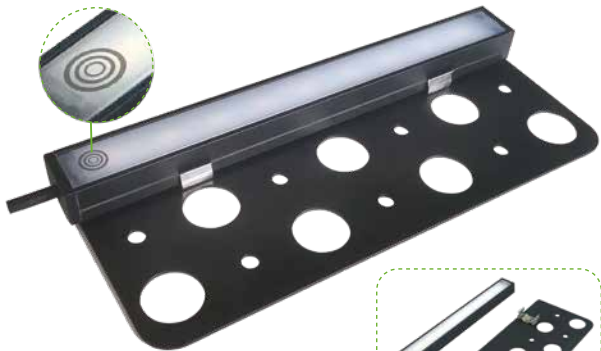

Replaceable

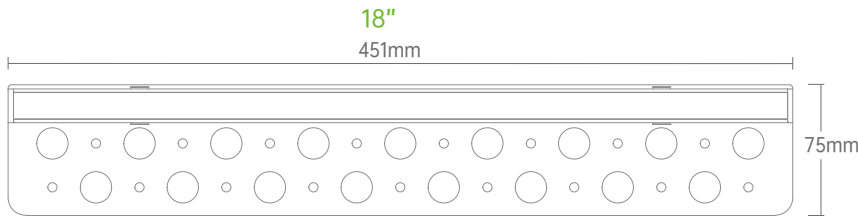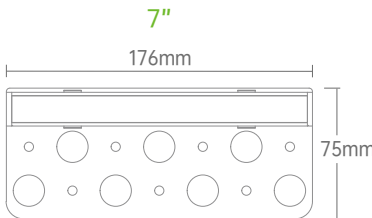

SPECIFICATION

Model	Voltage	Wattage	Lumens	CCT	CRI	Beam Angle	Dimension
JXL-ST0304-5CCT	AC/DC12-24V	2W	120LM	5CCT Tunable	80+	95°	76X75X17MM
JXL-ST0704-5CCT	AC/DC12-24V	4W	250LM	5CCT Tunable	80+	95°	176X75X17MM
JXL-ST1204-5CCT	AC/DC12-24V	5W	360LM	5CCT Tunable	80+	95°	300X75X17MM
JXL-ST1804-5CCT	AC/DC12-24V	7W	510LM	5CCT Tunable	80+	95°	451X75X17MM