




EC Building Supply is a professional building materials supplier based in Long Island, New York. Founded by a team with extensive experience in construction and engineering, our mission is to provide high-quality and reliable building materials and solutions for contractors, developers, and property management companies across the region.

Since our establishment, we have adhered to the principles of integrity, quality, and service excellence. By maintaining long-term partnerships with trusted manufacturers and suppliers, we ensure that every client receives dependable products at competitive prices.

From residential and commercial projects to large-scale developments, EC Builder Supply is your trusted partner for all construction needs.

Quick release heavy duty tubular leverset lock describe

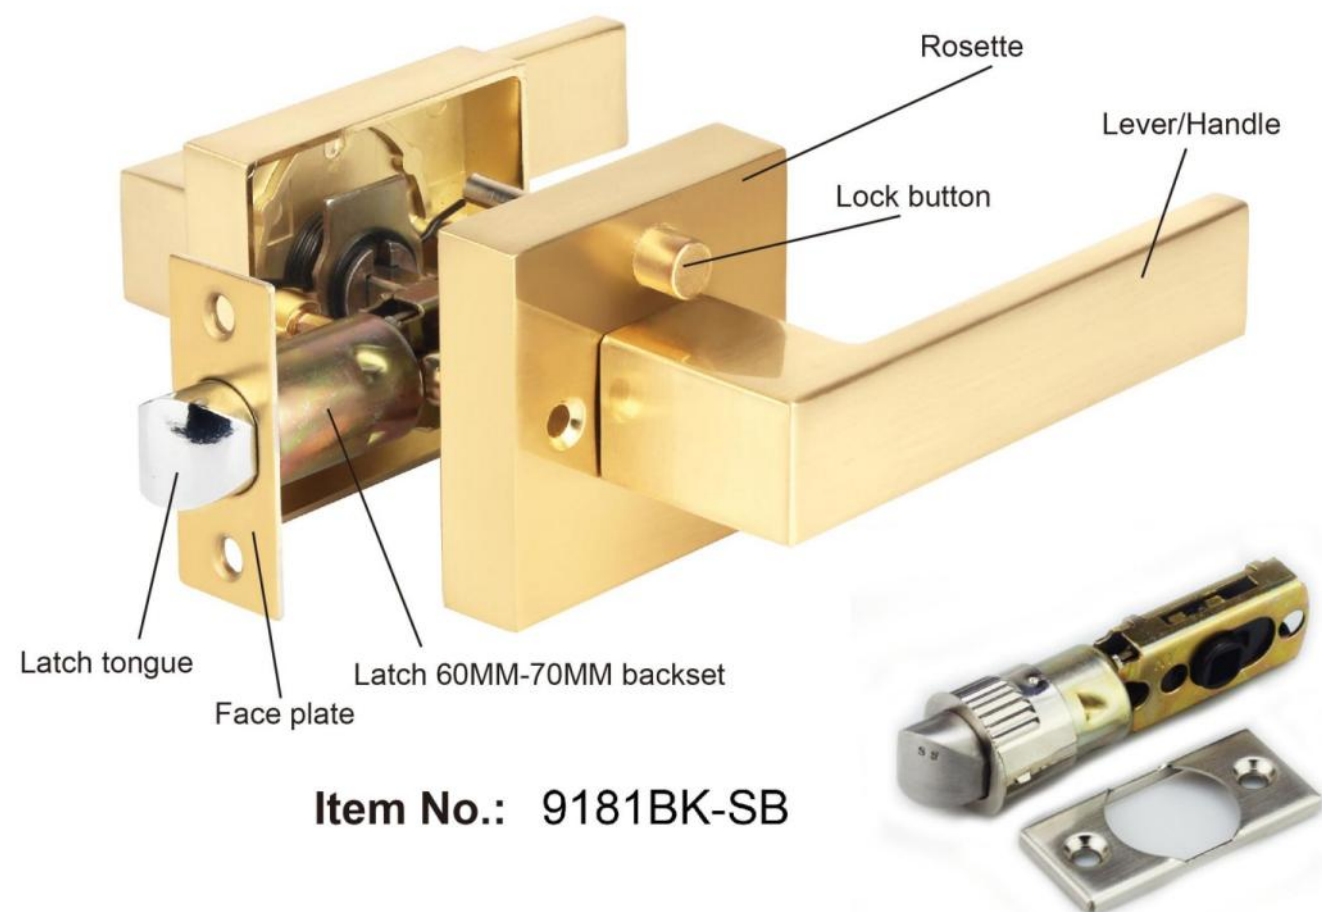

- Privacy, Passage and Dummy function are available.
- Fit all standard doors form 1-3/8" to 1-3/4"(35mm to 45mm) thickness. Also can fit 2"(50mm) thickness door upon request.
- Zinc alloy handle and aluminum handle can be selected.
- 65mm diameter SSS.201/304 rounded rosette or zinc alloy quadrate rosette are available.
- Adjust 2-3/8 and 2-3/4(60mm and 70mm) backset latch.zinc or SSS.304 tongue are available.
- All conventional style finishing(Satin nickel,Satin chrome,Polished brass,Polished chrome, Antique brass,Antique copper,Oil rubbed bronze) are available.
- Packing: Color box,Window box,Hot blister,Button blister and gift package.

Quick release heavy duty tubular leverset lock



9191BK-CP



9191PS-CP



9191BK-CP



9191PS-CP



9191PS-SN



9191BK-ORB



9191DUM-CP



9151PS-CP

Quick release heavy duty tubular leverset lock



9181BK-SB



9181BK-SN



9181DUM-SB



9172DUM-SB



9172BK-SB



9172PS-SB



9172BK-MB



9172DUM-MB

Quick release heavy duty tubular leverset lock



9171BK-SN



9171PS-SN



9171BK-MB



9171DUM-SN



9161BK-SN



9161PS-SN



9161PS-SN



9161DUM-SN

Quick release heavy duty tubular leverset lock



9120BK-CP



9120BK-SB



9120PS-SC



9120PS-MB



9120BK-MB



C593BK-PB




592PS-SN



M594BK-SN

Heavy duty tubular leverset lock describe

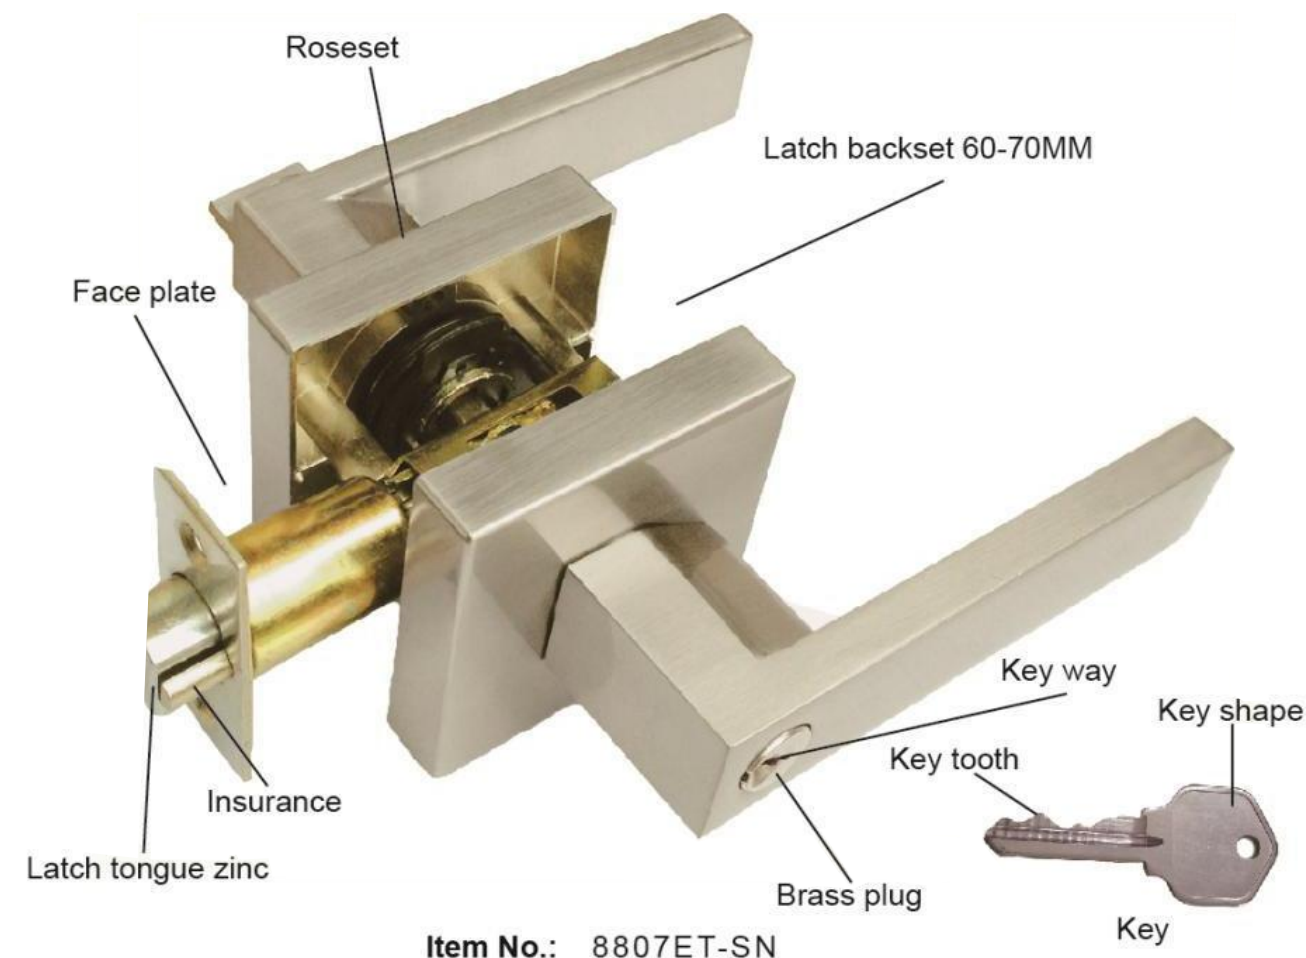

- ◎ Entrance, privacy, storeroom and passage function are available.
- ◎ Fit all standard doors form 1-3/8" to 1-3/4"(35mm to 45mm) thickness. Also can fit 2"(50mm) thickness door upon request.
- ◎ Zinc alloy handle and rosette , square shape or round shape are available.
- ◎ 65mm/70mm diameter rosette can be chosen.
- ◎ Fixed 2-3/8 or 2-3/4(60mm,70mm or 90mm) backset latch.
- ◎ All conventional style finishing(Satin nickel,Satin chrome,Satin stainless steel, Polished brass,Polished chrome,Antique brass,Antique copper,Oil rubbed bronze) are available.
- ◎ Brass cylinder with nickel plated brass keys and 5-pin tumbler mechanism.

Heavy duty tubular leverset lock



8834ET-MB



8834BK-MB



8834PS-MB



8834DUM-MB



8834ET-SN



8834BK-SN



8834PS-SN



8834DUM-SN

Heavy duty tubular leverset lock



8803ET-AC



8803ET-AB



8803ET-SN



8803PS-SN



8804ET-AC



8804ET-AB



8805ET-CP



8805BK-SN

Heavy duty tubular leverset lock




8805ET-ORB



8806ET-AC



8806ET-ORB

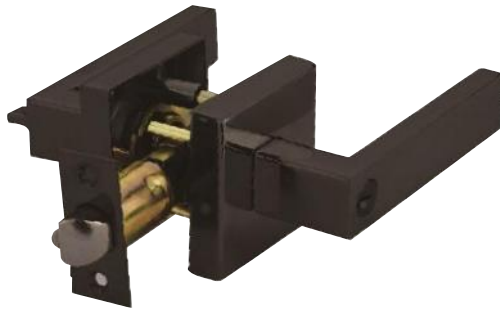

8807ET-BN



8807BK-ORB



8807PS-BN



8807ET-AB




8807ET-AC

Heavy duty tubular leverset lock



8807ET-PB

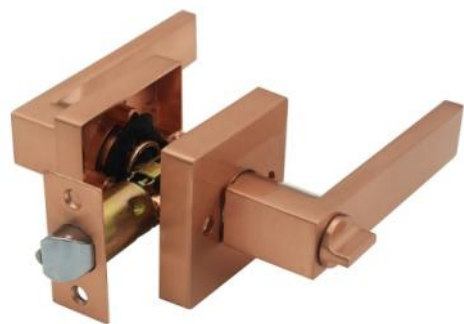

8807ET-RG



8807DUM-SN



8811BK-SN



8812BK-SN



8812BK-SN



8815ET-SN



8815BK-SN



Heavy duty tubular leverset lock



8815PS-SN



8816BK-SN



8816ET-PB



8817PS-SN



8818BK-SN



8819BK-SN



8819ET-AC



8821BK-SN



Heavy duty tubular leverset lock



8821ET-SN



8824ET-AB



8824BK-SN



8825ET-AB



8826ET-SN



8826ET-SN



8826PS-BN



8826ET-ORB



Heavy duty tubular leverset lock



8826ET-PB



8827ET-ORB



8832ET-ORB



8832BK-ORB



Heavy duty tubular leverset lock

- Stainless steel handle and rosette.
- Right and left handles can be universal or interchangeable.
- This series of structures can hide the screws required.



8901ET-SS



8902ET-SS



8903ET-SS



8605BK-SS



8607BK-SS




8617BK-SS



ZINC ALLOY KNOB
8501ET-SN

Tubular leverset lock describe

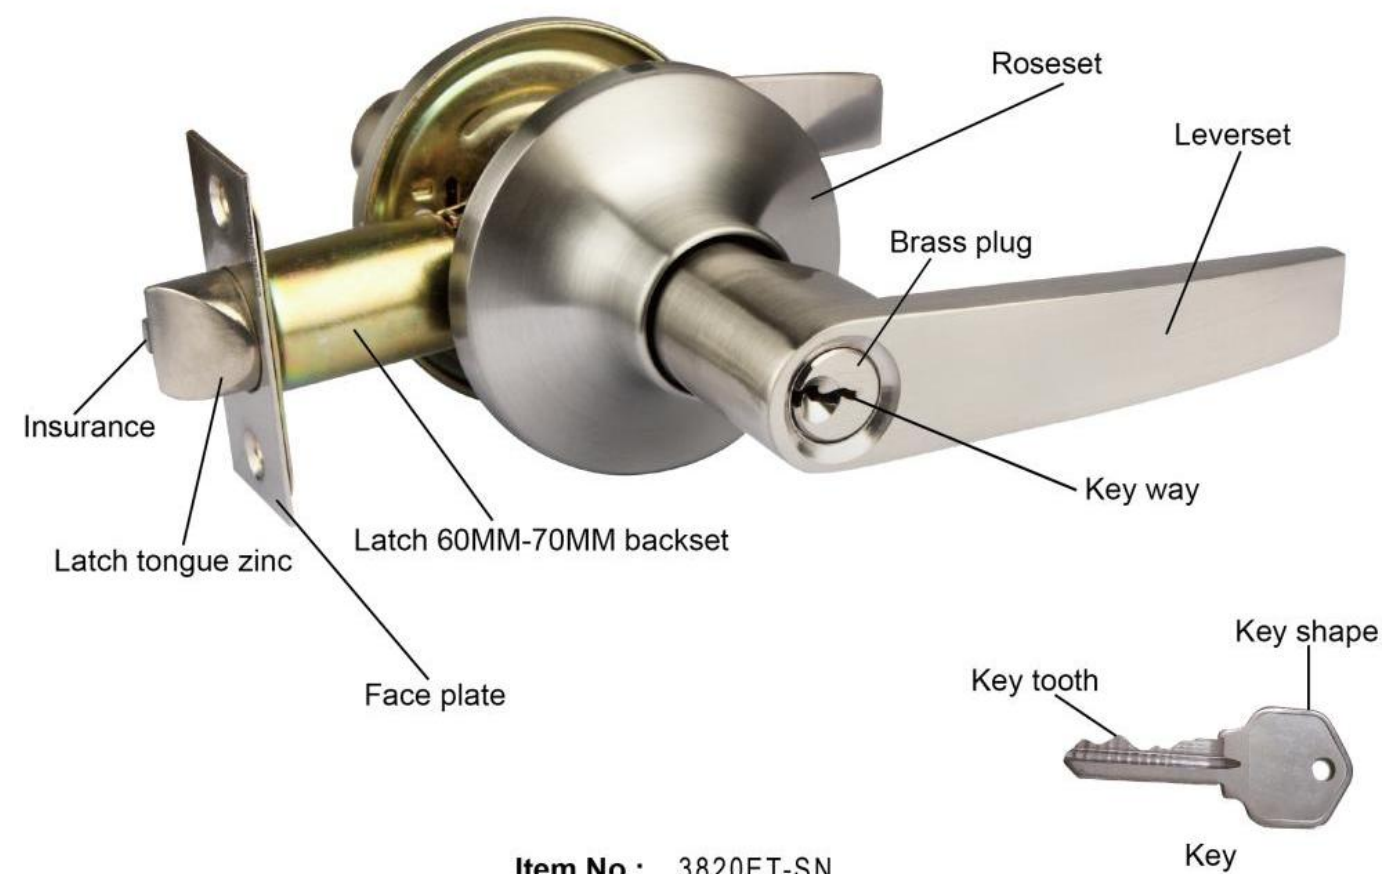

- Entrance, privacy, storeroom and passage function are available.
- Fit all standard doors form 1-3/8" to 1-3/4"(35mm to 45mm) thickness. Also can fit 2"(50mm) thickness door upon request.
- Stainless steel201/304 knob, brass knob, and wood knob are available.
- 65mm/75mm diameter rosette can be chosen.
- Adjust 2-3/8 and 2-3/4(60mm and 70mm) backset latch.
- All conventional style finishing(Satin nickel, Satin chrome, Polished brass, Polished chrome, Antique brass, Antique copper, Oil rubbed bronze) are available.
- Brass cylinder with nickel plating brass keys and 5-pin tumbler mechanism.
- Packing: Color box, Window box, Hot blister, Button blister and gift package

Tubular leverset lock



1809ET-MB



1810ET-AB



1820PS-SN



1820ET-PB



1830ET-PW



1840ET-PB



1850ET-SB



1860ET-AC



Tubular leverset lock



1863BK-SN



1863ET-SN



1870ET-AB



1880ET-AB



1890ET-PB



2700BK-SN



6491BK-MB



6491ET-SN



Tubular leverset lock



3820ET-MB



3820ET-MB



3820PS-MB



3820BK-SN



3820PS-SN



3820ET-SN



3820DUM-SN



3820DUM-MB

Tubular leverset lock



3880ET-SN



808ET-SC




809ET-SC



1610PS-SN

Tubular knobset door lock describe

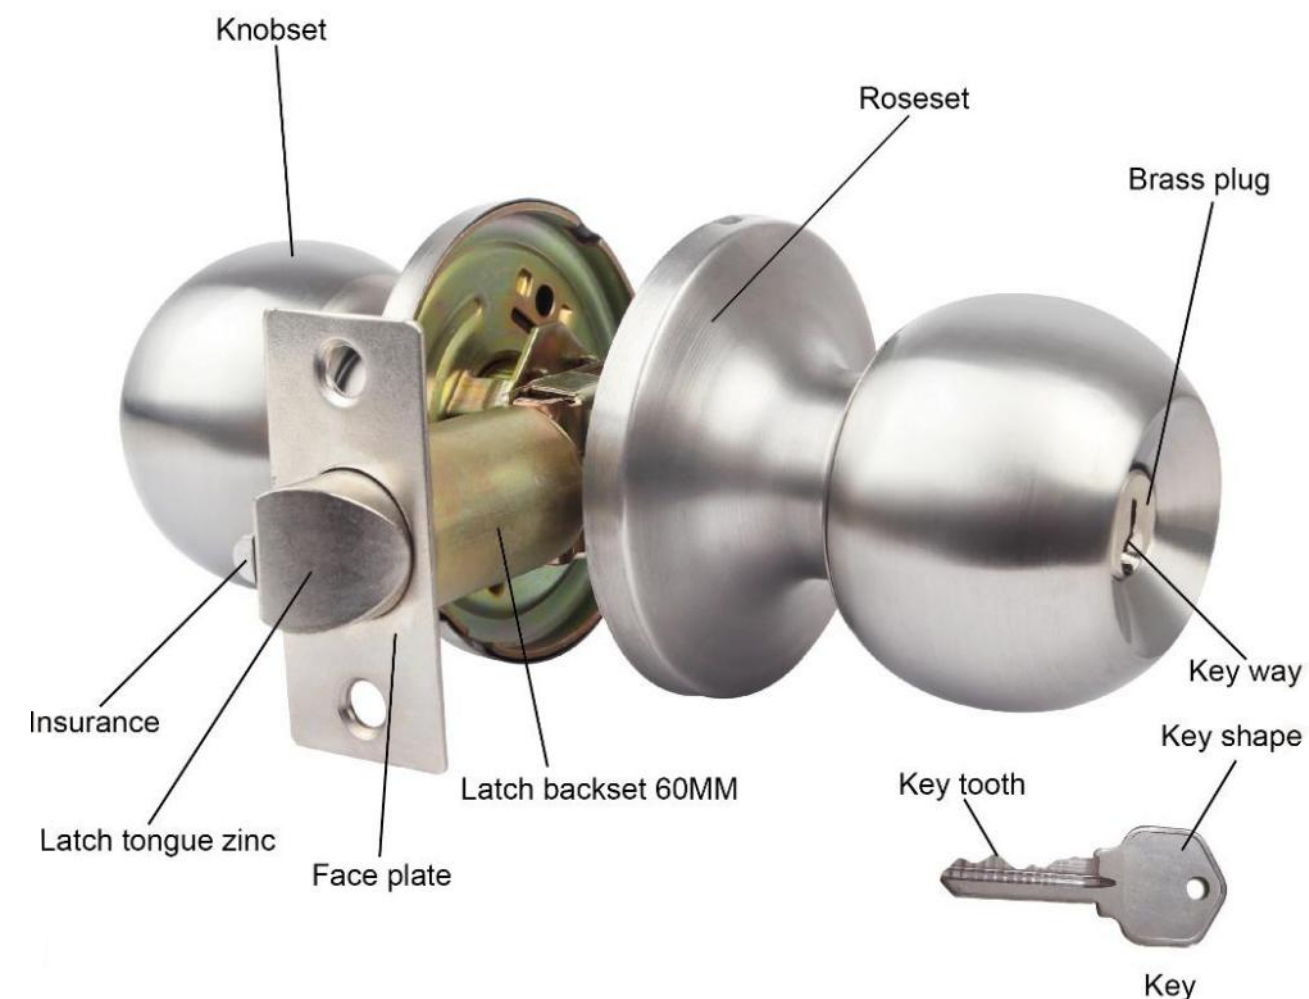

Item No.: KY587ET-SS

- Entrance, privacy, storeroom and passage function are available.
- Fit all standard doors from 1-3/8" to 1-3/4" (35mm to 45mm) thickness. Also can fit 2" (50mm) thickness door upon request.
- Brass knob, stainless steel 201/304 knob and wood knob are available.
- 65mm/75mm diameter rosette can be chosen.
- Fixed 2-3/8", 2-3/4" or 3-9/16" (60mm, 70mm or 90mm) backset.
- All conventional style finishing [Satin nickel (US15), Satin chrome (US26D), Satin stainless steel (US32D), Polished brass (US3), Polished chrome (US26), Antique brass (US5), Antique copper (US11), Oil rubbed bronze (US10B)] are available.
- Brass cylinder with nickel plated brass keys and 5-pin tumbler mechanism.



Tubular knobset door lock



KY570ET-PB



KY570ET-SS



KY570ET-SB



KY570ET-CP



KY570PS-SS



570DUM-PB



576ET-CP



576ET-MB



Tubular knobset door lock



576ET-PB



576ET-SN



576ET-SN



KY587ET-SS



KY587ET-CP



KY587PS-SS



KY587ET-MB



KY587BK-MB

Tubular knobset door lock



587PS-MB



KY587ET-PB



KY587ET-AB



587DUM-SN



587DUM-SS



587DUM-MB



KY590BK-SB



KY590ET-SS

Tubular knobset door lock



KY6121ET-SS



KY6121BK-AB



KY5831ET-SS



KY5835ET-SS



KY205PS-SS




KY5791ET-SS



5762ET-PB

Cylindrical leverset lock describe

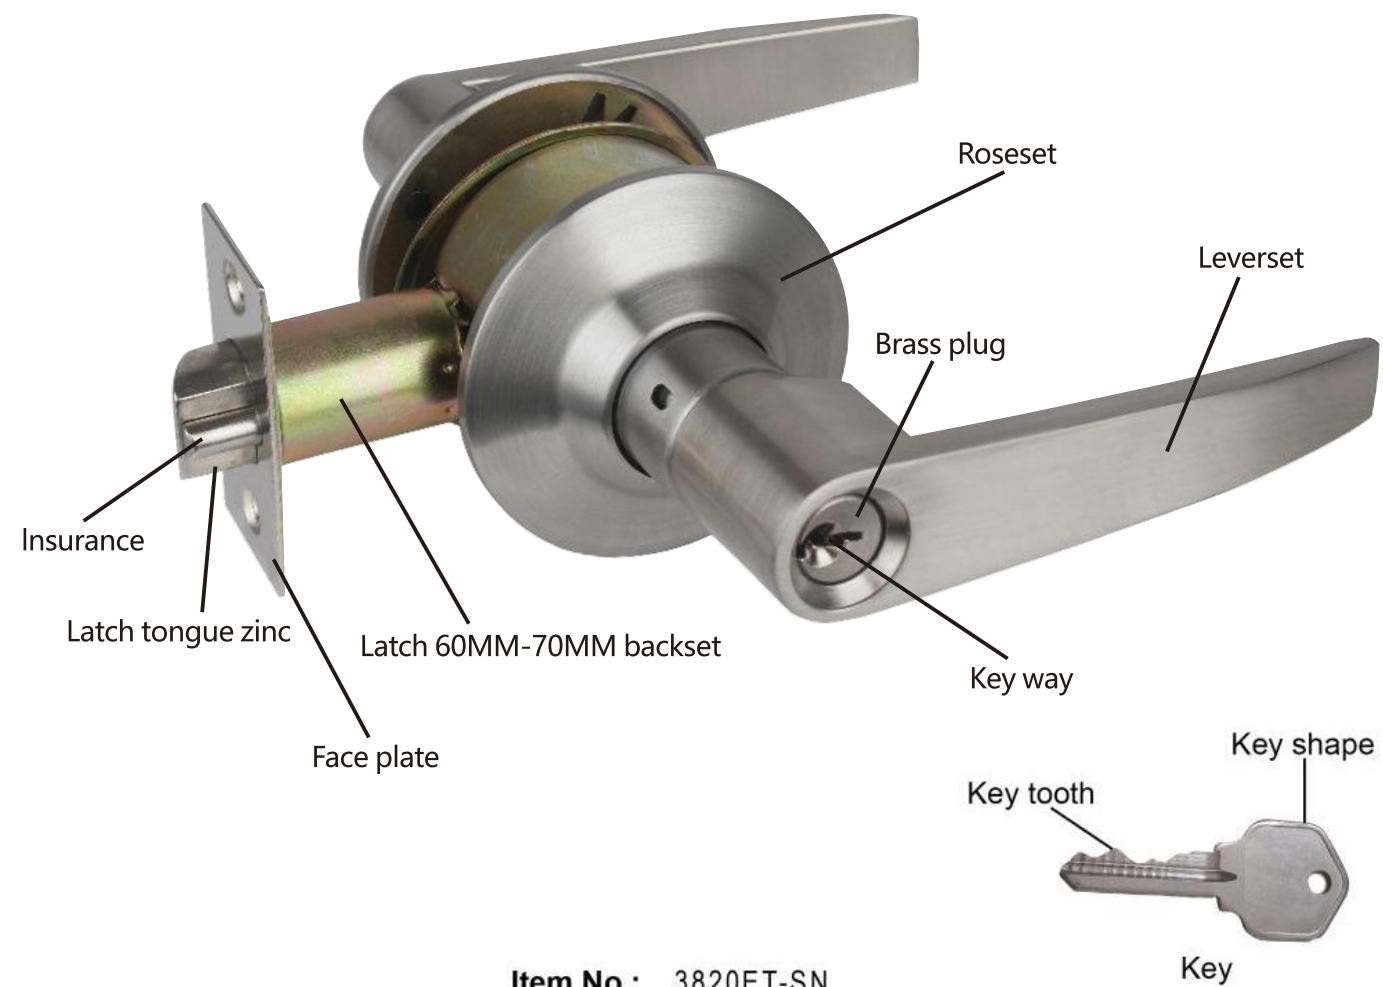


- Entrance, privacy, storeroom and passage function are available.
- Fit all standard doors form 1-3/8" to 1-3/4"(35mm to 45mm) thickness. Also can fit 2"(50mm) thickness door upon request.
- Stainless steel201/304 knob, brass knob, and wood knob are available.
- 65mm/75mm diameter rosette can be chosen.
- Adjust 2-3/8 and 2-3/4(60mm and 70mm) backset latch.
- All conventional style finishing(Satin nickel, Satin chrome, Polished brass, Polished chrome, Antique brass, Antique copper, Oil rubbed bronze) are available.
- Brass cylinder with nickel plating brass keys and 5-pin tumbler mechanism.
- Packing: Color box, Window box, Hot blister, Button blister and gift package

Cylindrical leverset lock



Cylindrical knobset door lock describe

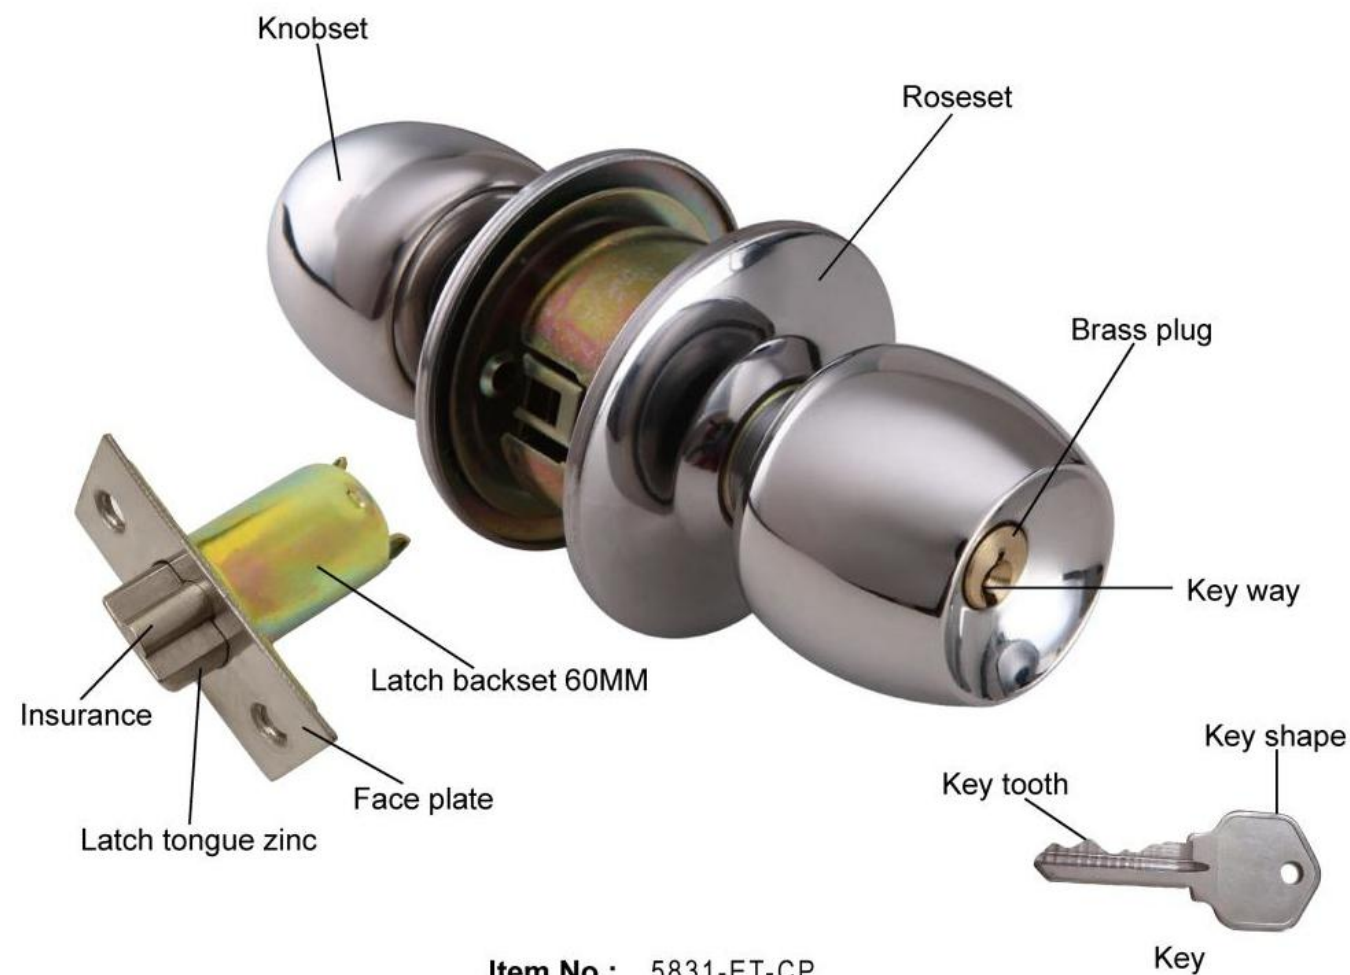

Item No.: 5831-ET-CP

- Entrance, privacy, storeroom and passage function are available.
- Fit all standard doors from 1-3/8" to 1-3/4" (35mm to 45mm) thickness. Also can fit 2" (50mm) thickness door upon request.
- Brass knob, stainless steel 201/304 knob and wood knob are available.
- 65mm/75mm diameter rosette can be chosen.
- Fixed 2-3/8 or 2-3/4 (60mm, 70mm or 90mm) backset latch.
- All conventional style finishing (Satin nickel, Satin chrome, Satin stainless steel, Polished brass, Polished chrome, Antique brass, Antique copper, Oil rubbed bronze) are available.
- Brass cylinder with nickel plated brass keys and 5-pin tumbler mechanism.

Cylindrical knobset door lock



5831ET-SS



5831PS-SS



5831ET-BS-RW



5831ET-SS



5831ET-BN



5831ET-PB



5831ET-WA-AC



5835ET-W-AC

Cylindrical knobset door lock



5835ET-WK-SB



5835ET-SB



5871ET-PB



5871ET-SSP



5871ET-AB



5871ET-AC



5871PS-SS



5871ET-MB

Cylindrical knobset door lock



5872ET-AB



5875ET-SS



5875ET-AB



5875BK-BN



5875ET-AB



5875ET-BN




5875ET-PB



5875ET-SS

Cylindrical knobset door lock

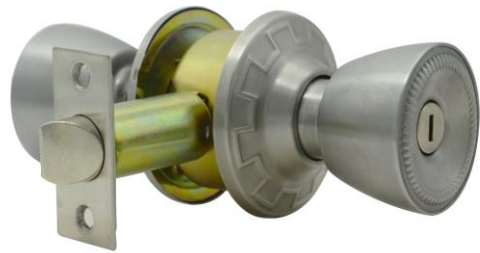

588BK-SS



588ET-AB



588ET-PB



588ET-SS



5885ET-SN



5895ET-BN/PB



5791ET-PB



570ET-PB

Cylindrical knobset door lock



590BK-PB



590ET-SS




0758BK-SS



0750BK-PB

Deadbolt lockset describe

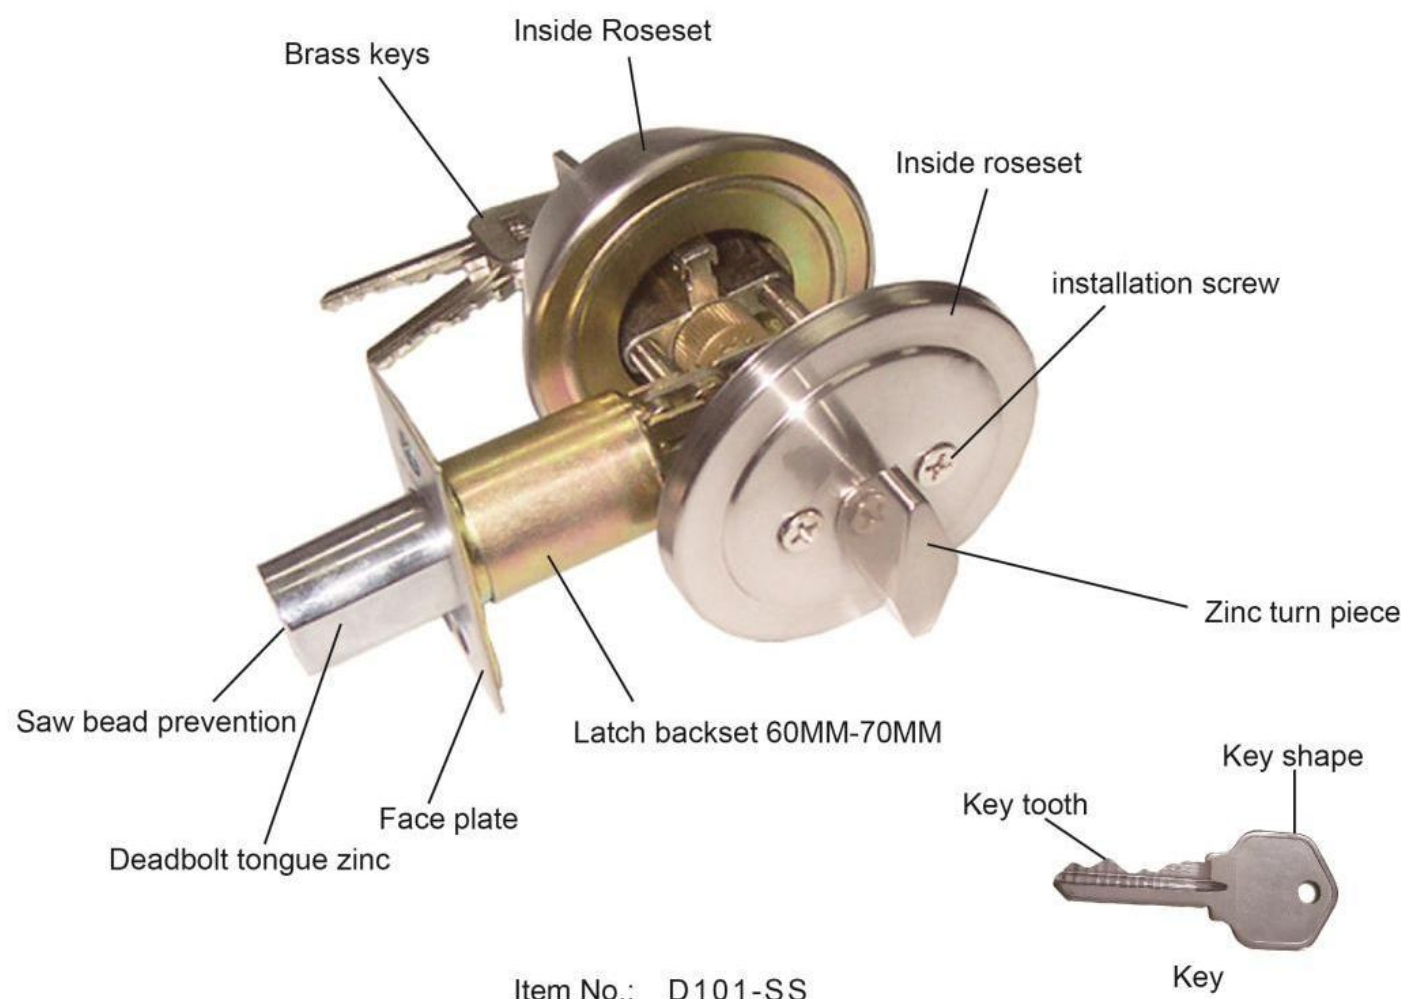

- ◎ Single cylinder, double cylinders, single side and dummy function are available.
- ◎ Fit all standard doors form 1-3/8" to 1-3/4"(35mm to 45mm) thickness. Also can fit 2"(50mm) thickness door upon request.
- ◎ Brass, stainless steel201/304, and steel rosette are available.
- ◎ 65mm diameter rosette are conventional.
- ◎ Adjust 2-3/8 to 2-3/4(60mm-70mm) backset.
- ◎ All conventional style finishing(Satin nickel,Satin chrome,Satin stainless steel, Polished brass,Polished chrome,Antique brass,Antique copper,Oil rubbed bronze) are available.
- ◎ Brass cylinder with nickel plated brass keys and 5-pin tumbler mechanism.

Deadbolt lockset



D101-SS



D101-AB



D101-AB



D101-AC



D102-SC



D102-PB



D102-ORB



D110-SC



Deadbolt lockset



D111-SS



D120-SS



DW01-CP



DW01-PB



SS102-SS



SS102-ORB



S101-SS



S102-SS



Deadbolt lockset



S105-SN



RS102-ORB



R101-SN



R103-SN



R105-SN



R105-SN




RS102-SS



RS102-CP

Handleset door lock describe

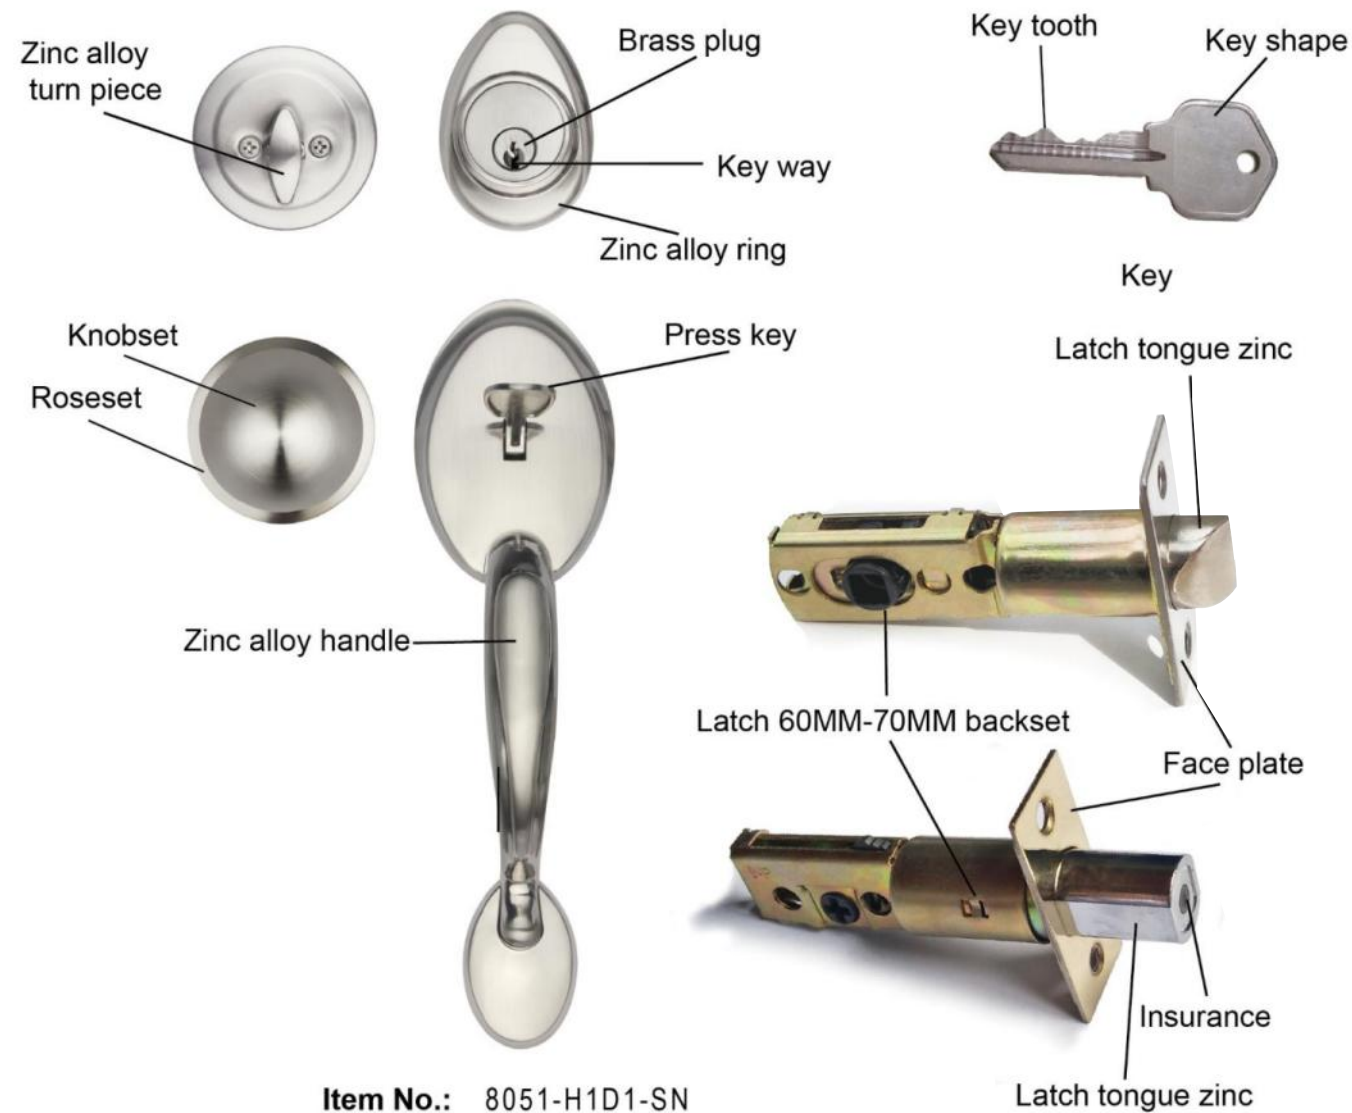

- Single handle, double handle, single cylinder and double cylinder function are available.
- Fit all standard doors form 1-3/8" to 1-3/4"(35mm to 45mm) thickness. Also can fit 2"(50mm) thickness door upon request.
- Brass Polished(US3), Satin Nickel(US15), Antique Brass(US5), Antique Copper(US11), Chrome Polished(US26), Oil Rubbed Bronze(US10B) and Satin Chrome(US26D) Finish are available.
- Inside door knob can be use tubular leverset, tubular knobset ,and handleset upon request.
- Adjust 2-3/8" to 2-3/4"(60mm-70mm) privacy latch and deadbolt backset .
- All conventional key shape you like.Construction key or master key for design.
- Brass cylinder with nickel plated brass keys and 5-pin tumbler mechanism.

Handleset door lock



8001-AB



8011-PB



8011H2D1-MB



8021-AB



8031-PB



8041-AB



8051-ORB



8061-AB



Handleset door lock



8051-H1D1-SN



8051-H2D1-SN



8051-H1D2-SN



8051-H1D1-AB



8051-H1D2-PB



8051-H2D2-PB



Handleset door lock



8071-AC



8081-PB+SN



8083-PB+SN



8091-AB



8093-AB



8111-H1D1-AB



8121-H2D2-AC



Handleset door lock



8051H1D1-AB



8051H1D2-AB



1998H1D1-PB



1998H1D1-ORB



1998H1D2-ORB



1998H1D2-PB



Handleset door lock



1998H1D1-SN



1998-H1D1-AB



1998-H1D2-PB



1998H1D2-SN



1998-PB



Handleset door lock



1998H1D1-SN-WITH HANDLE



1998H1D2-SN-WITH HANDLE



1998H1D1-CP-WITH HANDLE



1998H1D1-ORB-WITH HANDLE



1998H1D2-ORB-WITH HANDLE



Handleset door lock



2001H1D1-AB-WITH HANDLE



2001H1D1-CP-WITH HANDLE



2001H1D1-MB-WITH HANDLE



2001H1D2-AB-WITH HANDLE



2001H1D2-CP-WITH HANDLE



2001H1D1-SN-WITH HANDLE



Handleset door lock



2001H1D2-MB-WITH HANDLE



2001H1D2-SN-WITH HANDLE



2001-H1D1-ORB HEAVY
WITH HANDLE



2001-H1D1-AB



2001-PC



2002-AB



2003H1D1-MB



Handleset door lock



5835-H1D1-SN HANDLE



5998-H1D2-SN




9901-AB



9910-AC



7360-PC

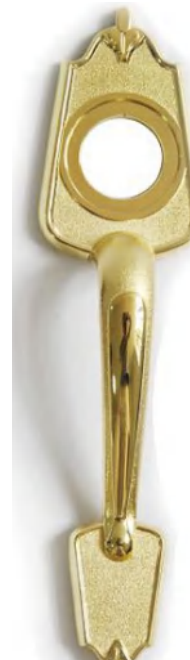

7360-PB



2213-AC

Rim lock



2015DL-SN

- Size :130x106x40MM
- Double loose cylinder
- Lift door opening



2015DR-SN

- Size :130x106x40MM
- Double loose cylinder
- Lift door opening



2015DTL-SN

- Size :130x106x40MM
- Double loose cylinder
- Button inside
- Lift door opening



2015DTR-SN

- Size :130x106x40MM
- Double loose cylinder
- Button inside
- Lift door opening



2015DBL-SN

- Size :130x106x40MM
- Double loose cylinder
- Turn piece inside
- Lift door opening




2015DBR-SN

- Size :130x106x40MM
- Double loose cylinder
- Turn piece inside
- Lift door opening

MAGNETIC LOCK

© Electric source: Input voltage:
AC110V(60HZ) - 220V(50HZ),
Output voltage: DC 12V

© Brass cylinder with nickel
plated brass keys and 5-pin
tumbler mechanism.

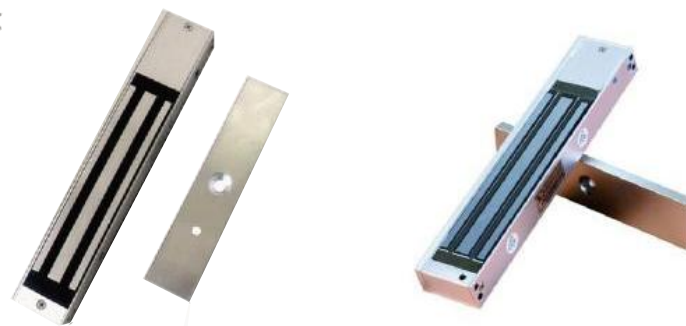

Rim lock



DW01-CP




SL01-AB



2015SL-SP



599RL-SP

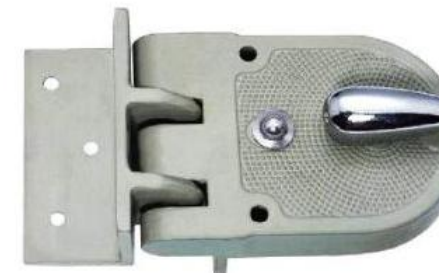

TG101-SP



TG102-SP



TG112-SP



2992-Green



Rim lock



564-AB



564-MB



564-PB




564-SN



2442-Green



2552-Green

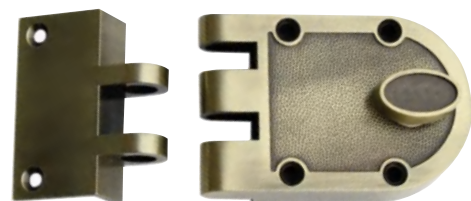

2661-AB



2661-CP



Rim lock



2661-MB




2661-SC



2661-PB



2661-SN

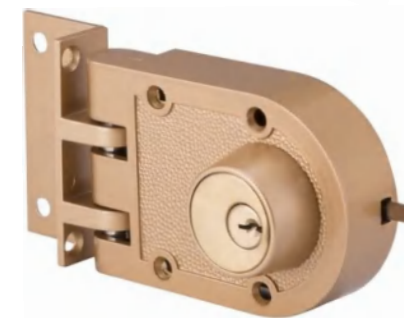

2662-PB



2882-Green



KY-I34



KY-SY12



KY-SY13



KY-P22



KY-L3



KY-T55Dtuya



KY-P4



KY-BX80



KY-BOX03



KY-L13



KY-L1+



KY-P4



KY-U003D long/U003D short



KY-T4



KY-C3



KY-GQ10F

TOP SECURITY

SMART LOCK



KY-Q1



KY-D001



KY-C001



KY-C101



KY-C102



KY-CG102



KY-T071



KY-T102

TOP SECURITY

SMART LOCK



KY-L003



KY-L002



KY-Q235



KY-Q236



KY-T334



KY-T335

Keyway




YaLe



schlage



C4







kwikset



waiser

key shape

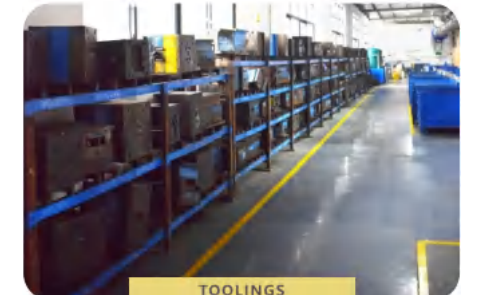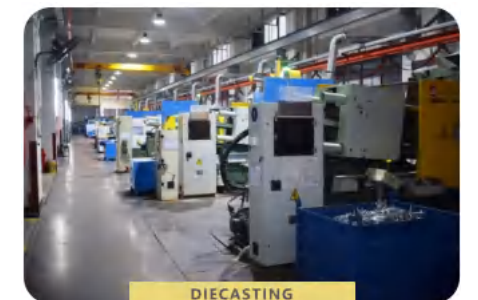
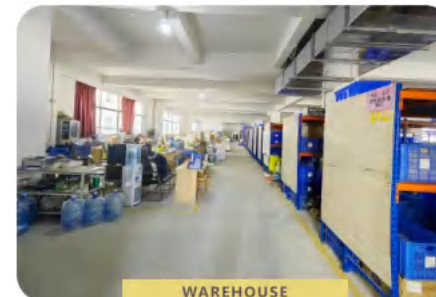
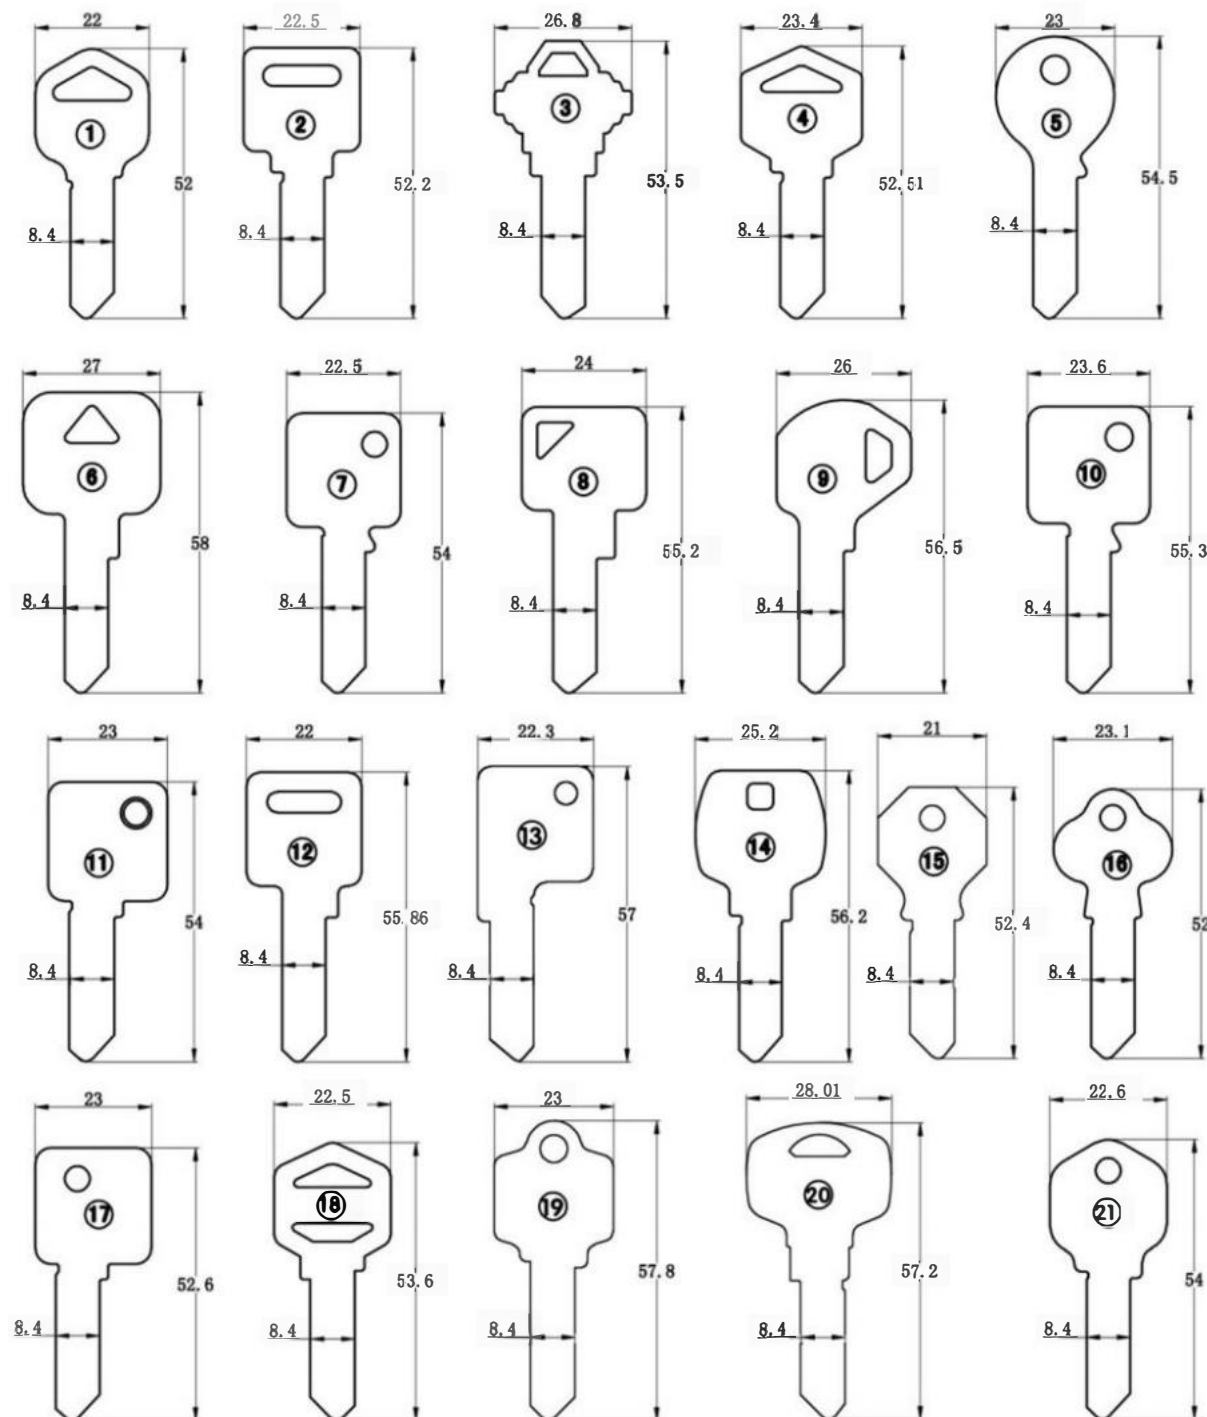


HOW TO CHOOSE THE DIRECTION OF THE DOOR

Standard for opening directions

DIN



Specification for confirming the door kind by opening direction according to Germany standard DIN107. When the door is closed, people stand on the side which hinge can be seen. Hinge on the left, it is called DIN left; hinge on the right, it is called DIN right.

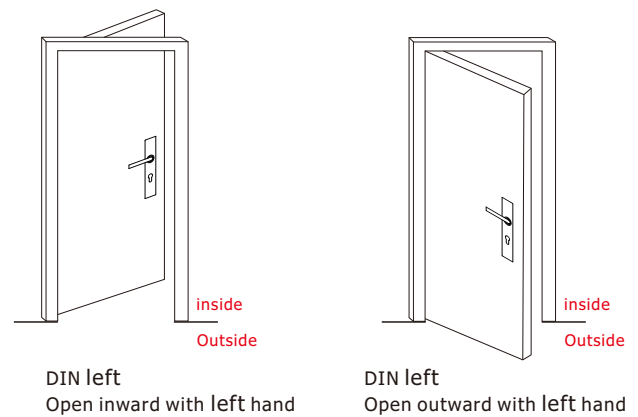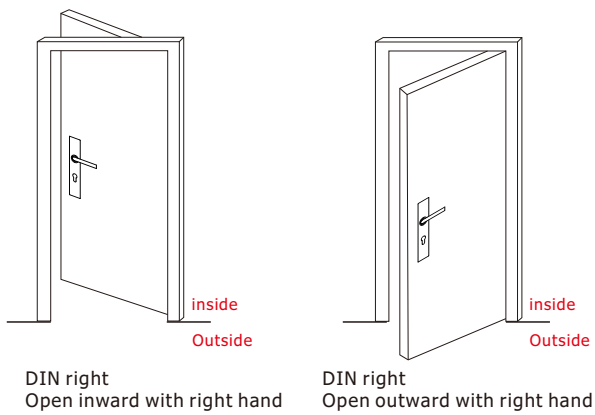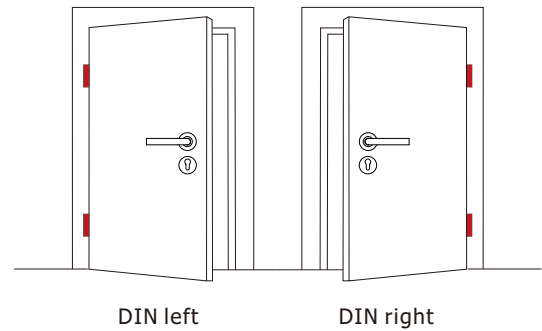

Standard for opening directions

ANSI


Door opening direction under ANSI standard as follows: when the door is close, people stand outdoor, hinge on the left, it is called ANSI left; hinge on the right, it is called ANSI right.

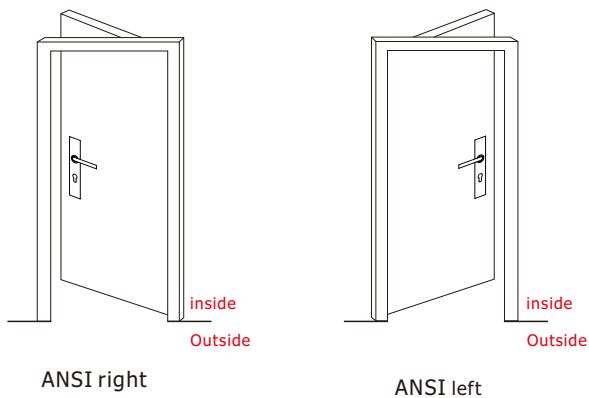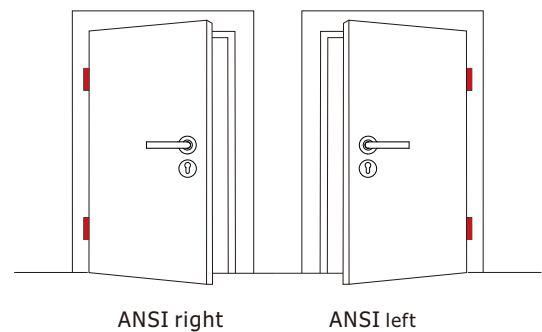

FUNCTION AVAILABLE

1(F81)


Entrance Lock/Office Lock



Turn/Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned.

8(F80)


Communicating Lock



Dead locking latch bolt operated by lever from either side. Turning key in either lever locks or unlocks its own lever independently.

1A(F82)


Entrance Lock/Office Lock



Pushing button in inside lever locks outside lever. Turning inside lever or operating key in outside lever releases button automatically. Closing door does not release button. Button can not be fixed in lock position. Inside lever always free. Latch bolt

8E(F87)


Institutional Lock



Dead locking latch bolt operated by key in lever from either side. Both levers always inoperable. Operating the key in the outside lever shall permit the latch bolt to be retracted by operating either the inside or outside lever, providing the key can not be removed in the unlocked.

2(F76)


Bathroom/Privacy



Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.

8A


Communicating Lock



Outside knob/lever always locked and only opened by outside keys; Inside lever/knob can locked or unlocked by key; when locked position the lever can NOT operate the deadlatch bolt; when unlocked position the lever can operate the deadlatch bolt; rotation 45° which inside lever can operate the deadlatch bolt.

3(F75)


Passage/Closet



Both levers always unlocked.

9(F89)

Exit Lock



Dead locking latch bolt retracted by lever from inside at all times. Outside lever is always inoperable.

0(F87)


Dummy Lock



Dummy trim for one side of door pull function.

4(F86)


Storeroom Lock



Outside lever always locked and only opened by outside keys; Inside lever always active providing emergency exit

9A(NoKey)


Connecting Room/Exit Lock



Exit function(for adjoining room), Outside blank rose only; Deadlocking latchbolt operated from inside only.

5(F84)


Classroom Lock



Outside lever can locked (anticlockwise rotation 45°) which outside lever can not operate the deadlatch bolt from outside or unlocked (clockwise rotation 45°) which outside lever can operate the deadlatch bolt; Inside lever always active providing emergency exit.

9B(Key)

Connecting Room/Exit Lock



























Outside blank rose only; with keys open the lock; Inside knob/lever Lock or unlock by key, when unlock it provide exit; When locked will stop exit. Deadlocking latchbolt operated from inside only.

KEYWAY

					
Kwikset T=2.0mm	T=2.0mm	Schlage T=2.2mm	Yale T=2.2mm	Computer T=2.5mm	Computer T=2.5mm

BLANK KEY

 K015 Hexagonal key 5 pin	 K016 Hexagonal key 6 pin	 K025 Hexagonal key 5 pin	 K026 Hexagonal key 6 pin	 Y015 Round head 5 pin	 Y016 Round head 6 pin
 E015 Schlage head 5 pin	 E016 Schlage head 6 pin	 M015 Plum blossom head 5 pin	 M016 Plum blossom head 6 pin	 D015 oval head 5 pin	 D016 oval head 6 pin
 C015 apple head 5 pin	 F015 square head 5 pin	 F016 square head 6 pin	 F025 square head 5 pin	 F026 square head 6 pin	 F035 square head 5 pin
 H015 crown head 5 pin	 CD015 apple head computer 5pin	 CD016 apple head 6 pin computer	 DD016 oval head computer 6 pin	 DD025 computer 5 pin	 DD026 computer 6 pin

Finish: Not all products available in all finishes



Satin Nickle
US15/619



Satin Chrome
US26D/626



Polished Brass
US3/605




Antique Copper
US11/616




Antique Brass
US5/609




Polished Chrome
US26/681




Matt Black



Oil Rubbed Bronze
US10B



Black Powder
Coated Matt



Satin Black Nickel

TRUST CODE	DESCRIPTION	ANSI/BHMA
SS	Satin Stainless Steel	630/US32D
SN	Satin Nickle	619/US15
SC	Satin Chrome	626/US26D
MB	Matt Black	US10B
RB	Oil Rubbed Bronze	613/US10B
AB	Antique Brass	609/US5
AC	Antique Copper	616/US11
CP	Polished Chrome	281/US26
PB	Polished Brass	605/US3
AN	Antique Nickle	US15A
SP	Polish Stainless Steel	629/US32
VB	Venetian Bronze	US11P
PVD	Particle Vapour Deposition	

ABBREVIATION	FUNCTION	SIZE	SHAPE
Kw	Kwikset	T=2.0mm	
Sc	Schlage	T=2.2mm	
C4	C4 keyway	T=2.0mm	
YI	Yale	T=2.2mm	
CM	Computer	T=2.5mm	

PACKAGE OPTIONAL		
White Box	Color Box	Blister
Standard Package	BOX Pack: 10 set/Ctn VP Pack: 10 set/Ctn	

Physical Vapor Deposition

The film prepared by PVD technology has the advantages of high hardness, low friction coefficient , good wear resistance and chemical stability, and the salt spray test exceeds 91 hours.



TRUST CODE	DESCRIPTION
TIS	Titanium Satin
TIB	Titanium Bright
ZIS	Zirconium Gold Satin
RRS	Rose Red Satin
RRB	Rose Red Bright
RGS	Rose Gold Satin
PAC	PVD Antique Copper
PAB	PVD Antique Bronze
PMB	PVD Matt Black
PBB	PVD Bright Black


Finish: Not all products available in all finishes

HEAVY DUTY COMMERCIAL LEVER SERIES-GRADE 2




Special Design for Heavy Duty Locks

Conforms with ANSI A156.2 series 450,000 Grade 2.

- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm).
- **Door Thick:** 1-3/8"(35mm) to 1-3/4"(50mm) thickness door Standard.
- **Backset:** 2-3/4"(70mm) standard. 2-3/8"(60mm) optional.
- **Latch:** 1/2" throw dead latch and spring latch.
- **Faceplate:** Square corner 1-1/8"2-1/4"(28.5×57mm) standard, 1" 2-1/4"(25.4×57mm) optional.
- **Through Bolts:** Removable through bolts.
- **Clutch:** Clutch (Free Wheel) function available for ET(Entry), ST(Storage) function.
- **Cylinder:** 6 pin removable core, Schlage C keyway, (Kwikset, C4 keyway optional).
- **Strikes:** T-Strike 2-3/4"x2-3/4"(44x70mm) standard, ASA-Strike 4-7/8" x 1-1/4"(123.8x31.7mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage), ST(4:Storeroom), CL(5:Classroom), CM(8:Communication), EX(9:Exit).

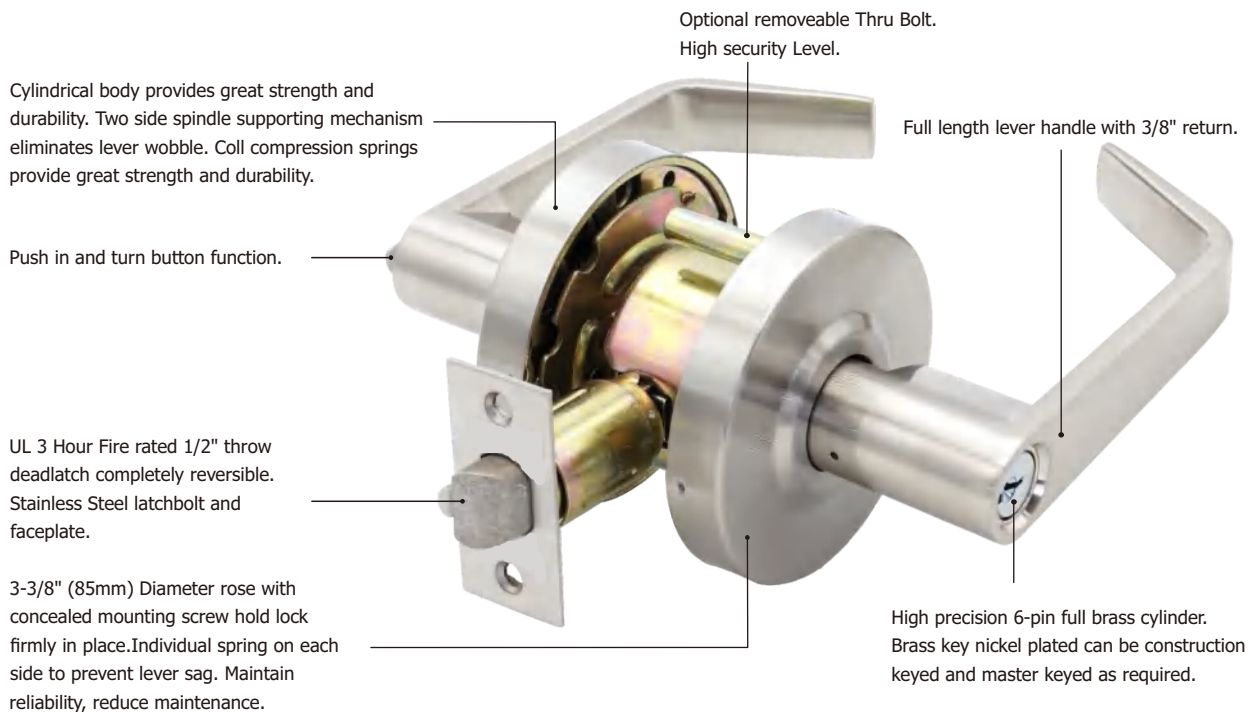

4571SN-ET

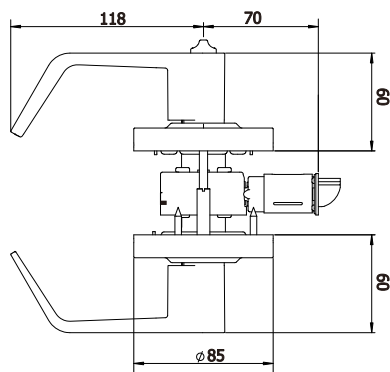


Standard Cylinder



I.C. Cylinder

ASSEMBLING

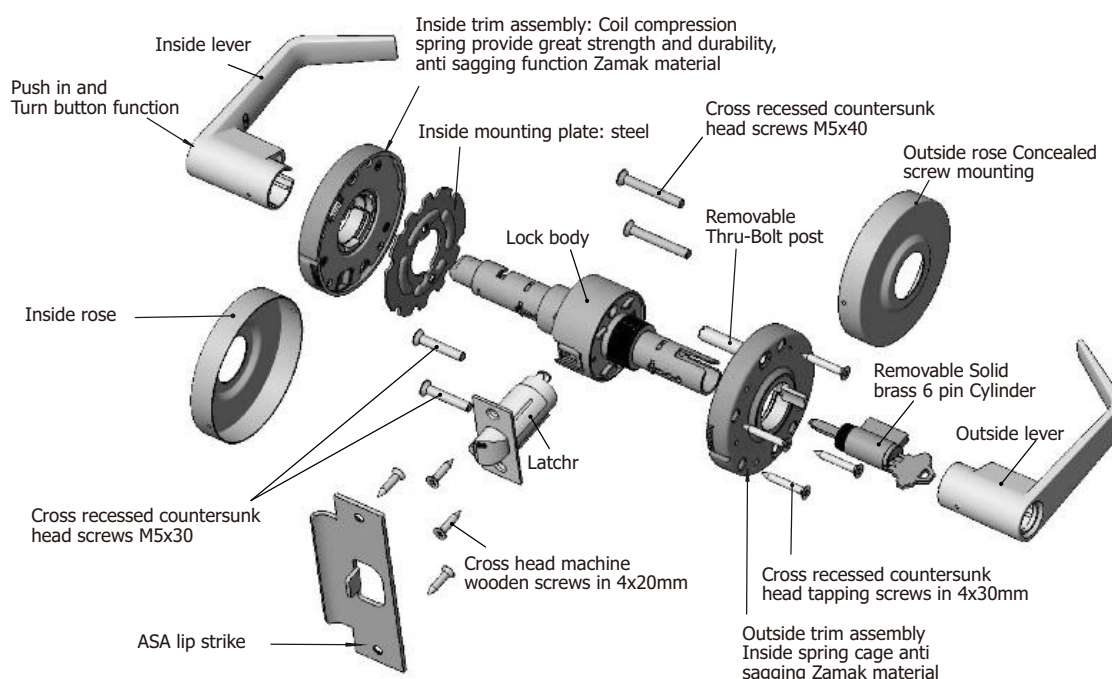

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
* ① 4571 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	4578E(F87) Communication(CM)		Entry or Exit by key only. Both levers always fixed.
* 4572 Bathroom(BK)		Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.	4578A Communication(CM)		1. Outside knob/lever always locked and only opened by outside keys; 2. Inside lever/knob can locked or unlocked by key.
4573 Passage(PS)		Both levers always unlocked.	4579 Exit(EX)		Dead locking latch bolt retracted by lever from inside at all times. Outside lever is always inoperable.
* 4574 Storeroom(ST)		Inside lever always Free, Outside lever fixed and unlocks by key only.	4579A Exit(No key)		Exit function(for adjoining room), Outside blank rose only; Deadlocking latchbolt operated from inside only,
4575 Classroom(CL)		Inside lever always Free, Outside lever locks and unlocks by key.	4579B Exit(With key)		Outside blank rose only; with keys open the lock; Inside knob/lever Lock or unlock by key, when unlock it provide exit; When locked will stop exit. Deadlocking latchbolt operated from inside only,
4578(F80) Communication(CM)		Dead locking latch bolt operated by lever from either side. Turning key in either lever locks or unlocks its own lever independently.	4570 Dummy(DM)		Dummy trim for oneside of door pull function.
* Available with Clutch Feature			① Available with I.C. Cylinder		

PRODUCT ITEM



4571SC-IC-ET



4571SN-ET



4572SC-BK



4573SN-PS



4574SN-ST



4575SC-CL



4578A-SN-CM



4578(F80)-SN-CM



4578E-SN-CM



4579SN-EX



4579A-SN-EX




4579B-SN-EX




4570SN-DM


LEVER HANDLE OPTIONAL




4571PB



4591MB




4511SC




4581SN

STRIKE OPTIONAL




T-Strike




ASA-Strike

HIGH SECURITY CYLINDERS

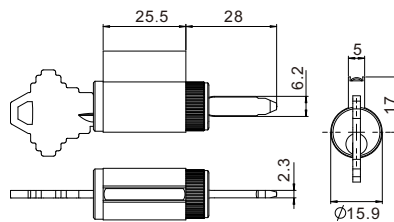

DOOR PREPARATION

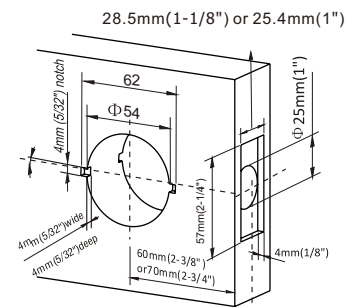

LATCH OPTIONAL



60mm latch
CODE:CL61-ET-SN



70mm latch
CODE:CL71-ET-SN

1-1/8"×2-1/4"(28.5×57×1.5mm) Square as standard
1"-2/4"(25×57×1.5mm) Square optional.

HOW TO ORDER

Example: MODEL: 4571SN-ET
4571SN(US15), Entry, 2 pc 6pin SC1 Keys,
Standard Cylinder, Free Wheeling, 70mm
latch(28.5*57mm), T-Strike.

CODE: 4 57 1 SN


Finish
Function
Lever Type
Series

P.S.: The Finish ,Keyway and Package optional in page 01




ANSI GRADE2 CYLINDRICAL LEVER SERIES

Special Design for Standard Duty Meets With ANSI A156.2 Grade 2.Exceeds 450,000 Life Cycles.

- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm).
- **Door Thick:** 1-3/8"(35mm) to 2"(50mm) thickness door Standard.
- **Backset:** 2-3/4"(70mm) standard. 2-3/8"(60mm) optional.
- **Latch:** 1/2" throw dead latch and spring latch.
- **Cylinder:** 6 pin removable core, Schlage C keyway, (Kwikset, C4 keyway optional).
- **Clutch:** Clutch (Free Wheel) function available for ET(Entry), ST(Storage) function.
- **Faceplate:** Square corner 1-1/8"2-1/4"(28.5x57mm) standard, 1" 2-1/4"(25.4x57mm) optional.
- **Strikes:** T-Strike 2-3/4"x2-3/4"(44x70mm) standard, ASA-Strike 4-7/8" x 1-1/4"(123.8x31.7mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage), ST(4:Storeroom), CL(5:Classroom), CM(8:Communication), EX(9:Exit).

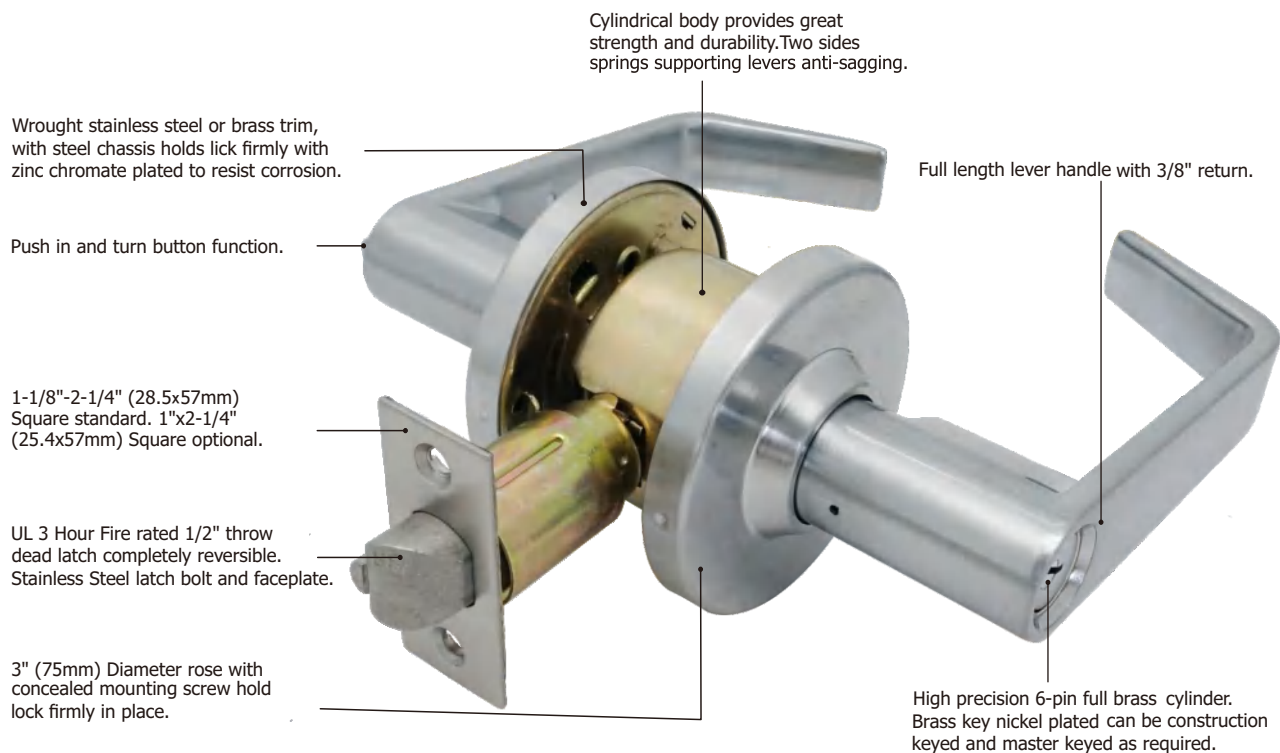

4471SC-ET

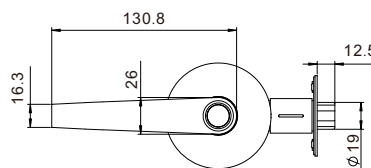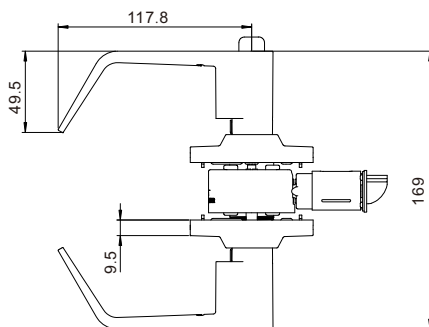


Standard Cylinder



I.C. Cylinder

ASSEMBLING

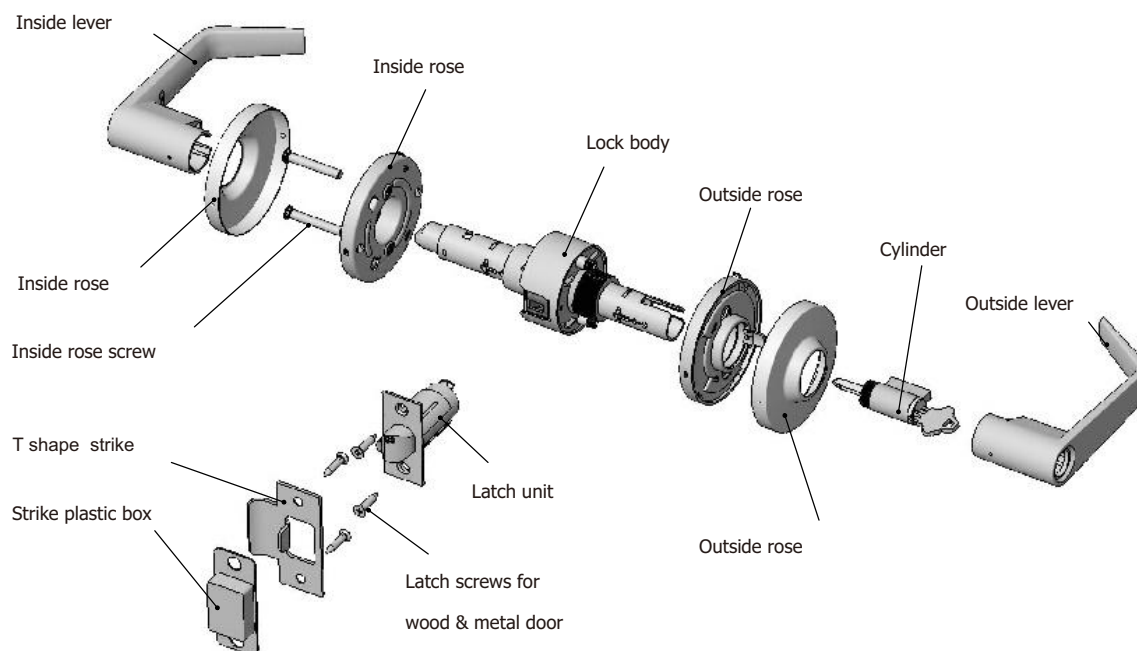

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
* ① 4471 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	4478E(F87) Communication(CM)		Entry or Exit by key only. Both levers always fixed.
* 4472 Bathroom(BK)		Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.	4478A Communication(CM)		1. Outside knob/lever always locked and only opened by outside keys; 2. Inside lever/knob can locked or unlocked by key.
4473 Passage(PS)		Both levers always unlocked.	4479 Exit(EX)		Dead locking latch bolt retracted by lever from inside at all times. Outside lever is always inoperable.
* 4474 Storeroom(ST)		Inside lever always Free, Outside lever fixed and unlocks by key only.	4479A Exit(No key)		Exit function(for adjoining room), Outside blank rose only; Deadlocking latchbolt operated from inside only,
4475 Classroom(CL)		Inside lever always Free, Outside lever locks and unlocks by key.	4479B Exit(With key)		Outside blank rose only; with keys open the lock; Inside knob/lever Lock or unlock by key, when unlock it provide exit; When locked will stop exit. Deadlocking latchbolt operated from inside only,
4478(F80) Communication(CM)		Dead locking latch bolt operated by lever from either side. Turning key in either lever locks or unlocks its own lever independently.	4470 Dummy(DM)		Dummy trim for onside of door pull function.

* Available with Clutch Feature

① Available with I.C. Cylinder

PRODUCT ITEM



4471SN-ET



4472SC-BK



4473SN-PS



4474SC-ST



4475SC-CL



4478A-SN-CM



4478(F80)-SN-CM



4478E-SN-CM



4479SN-EX



4479A-SN-EX




4479B-SN-EX




4470SN-DM


LEVER HANDLE OPTIONAL




4471PB



4491MB




4411SC



4481SN


STRIKE OPTIONAL

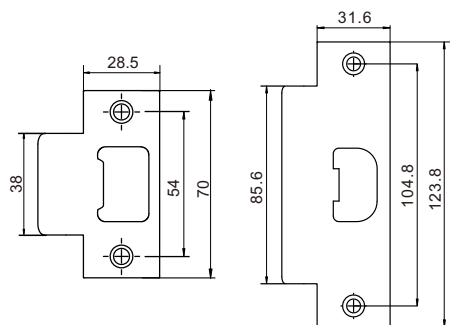


T-Strike

ASA-Strike

HIGH SECURITY CYLINDERS

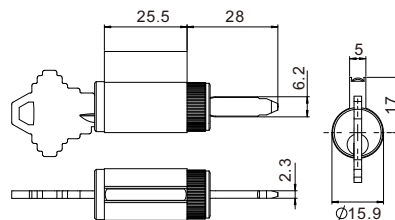

DOOR PREPARATION

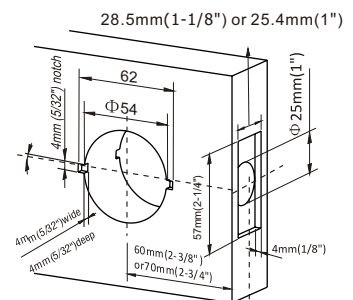

LATCH OPTIONAL



60mm latch
CODE:CL61SN-ET

1-1/8"×2-1/4"(28.5×57×1.5mm) Square as standard
1"-2/4"(25×57×1.5mm) Square optional.



70mm latch
CODE:CL71SN-ET

HOW TO ORDER

Example: MODEL: 4471SN-ET
4471SN(US15), Entry, 2 pc 6pin SC1 Keys,
Standard Cylinder, Free Wheeling, 70mm
latch(28.5*57mm), T-Strike.

CODE: 4 47 1 SN
Finish
Function
Lever Type
Series

P.S.: The Finish ,Keyway and Package optional in page 01

HEAVY DUTY COMMERCIAL KNOB SERIES-GRADE 2

Special Design for Standard Duty
Meets With ANSI A156.2 Grade 2.Exceeds 450,000 Life Cycles.

- **Door Prep:** Cross bore 2-1/8"(54mm),Edge bore 1 "(25mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 1-3/4"(50mm) thickness doors Standard.
- **Backset:** 2-3/4"(70mm) standard. 2-3/8"(60mm) optional.
- **Latch:** 1/2 throw dead latch and spring latch.
- **Cylinder:** 6-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25.4x57mm) standard,1-1/8"2-1/4"(28.5x57mm) optional.
- **Strike:** T-Strike 2-3/4"x2-3/4"(44x70mm) standard, ASA-Strike 4-7/8" x 1-1/4"(123.8x31.7mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage), ST(4:Storeroom), CL(5:Classroom) CM(8:Communicaton).




Wrought stainless steel or brass trim, with steel chassis holds lock firmly with zinc chromate plated to resist corrosion.

Push in button function.


1"x2-1/4" (25x57mm)
Square standard.

UL 3 Hour Fire rated 1/2" throw
deadlatch completely reversible.
Stainless Steel latchbolt and
faceplate.

Cylindrical body provides
great strength and durability.

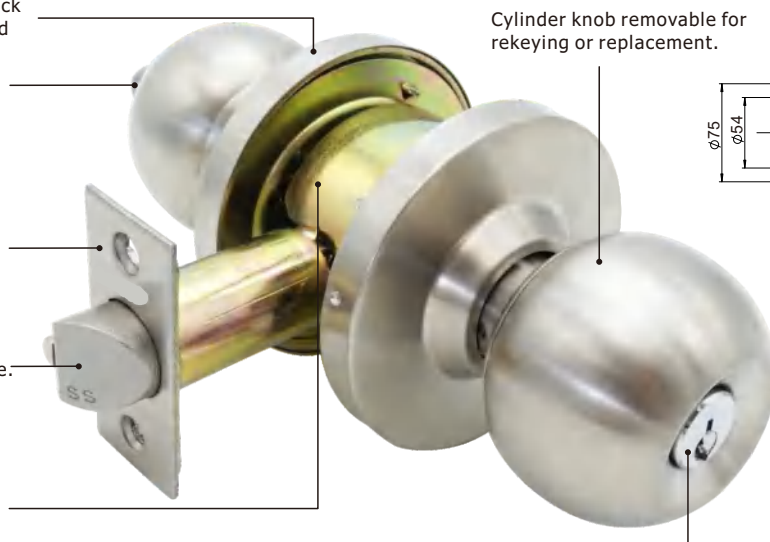

Cylinder knob removable for
rekeying or replacement.



High precision 6-pin full brass cylinder.
Brass key nickel plated can be construction
keyed and master keyed as required.

4371SS-ET

PRODUCT ITEM



4371SS-ET



4372PB-BK



4373SS-PS



4374SS-ST



4375SS-CL



4378A-SS-CM



4378(F80)-SS-CM



4378E-SS-CM



4379SS-EX



4379A-SS-EX



4379B-SS-EX



4370SS-DM

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
4371 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	4378E(F87) Communication(CM)		Dead locking latch bolt operated by key in lever from either side. Both levers always inoperable.
4372 Bathroom(BK)		Can be opened from outside when turning emergency slot, Pushing/turning button locks outside lever, turning inside lever to release button.	4378A Communication(CM)		Key in either lever locks or unlocks each lever independently.
4373 Bathroom(BK)		Can be opened from outside when turning emergency slot, Pushing/turning button locks outside lever, turning inside lever to release button.	4379 Exit(EX)		Dead locking latch bolt retracted by lever from inside at all times. Outside lever is always inoperable.
4374 Passage(PS)		Inside lever always Free, Outside lever fixed and unlocks by key only .	4379A Exit(EX)		Exit function(for adjoining room), Outside blank rose only; Deadlocking latchbolt operated from inside only,
4375 Dummy(DM)		Inside lever always Free, Outside lever locks and unlocks by key.	4379B Exit(EX)		Outside blank rose only; with keys open the lock; Inside knob/lever Lock or unlock by key, when unlock it provide exit; When locked will stop exit. Deadlocking latchbolt operated from inside only,
4378(F80) Communication(CM)		Outside lever can locked or unlocked by key separately ; Deadbolt operated by lever from either side.	4370 Dummy(DM)		Dummy trim for one side of door pull function.

LATCH OPTIONAL




60mm latch
CODE: CCL62SS-ET



70mm latch
CODE: CCL72SS-ET


STRIKE OPTIONAL

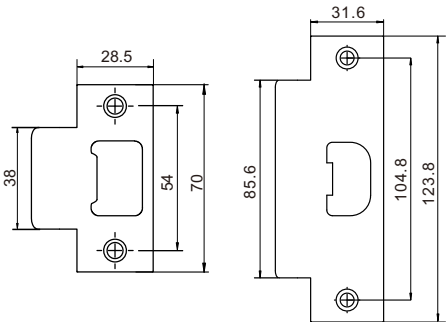


T-Strike

ASA-Strike

HIGH SECURITY CYLINDERS

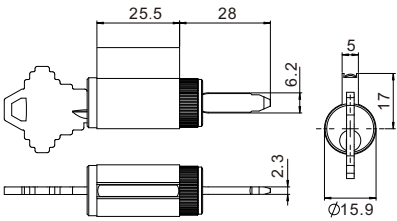

DOOR PREPARATION



HOW TO ORDER

Example: MODEL:4371 SS-ET
(US32D), Entry 2PC KW Keys,
60mm latch, T-Strike

P.S.: The Finish ,Keyway and Package optional in page 01

CODE: 4 37 1 SS

- Finish
- Function
- Lever Type
- Series



HEAVY DUTY COMMERCIAL DEADBOLT-ANSI GRADE 2

Special Design for Heavy-Duty, Commercial Quality,
Meets with ANSI A156.2 Grade 2. Exceeds 450,000 Cycles.

- **Door Prep:** Cross bore 1"(25mm), Edge bore 1"(25mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 2"(50mm) thick.
- **Backset:** 2-3/4"(70mm) or 2-3/8"(60mm) fixed standard, adjustable 60/70mm optional.
- **Latch:** Full 1"(25mm) throw deadbolt with hardened bolt.
- **Cylinder:** 6-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1-1/8"2-1/4"(28.5×57mm) as standard.
- **Strikes:** Square corner 1-1/8" × 2-3/4"(28.5×70mm).



COMMERCIAL DEADBOLT

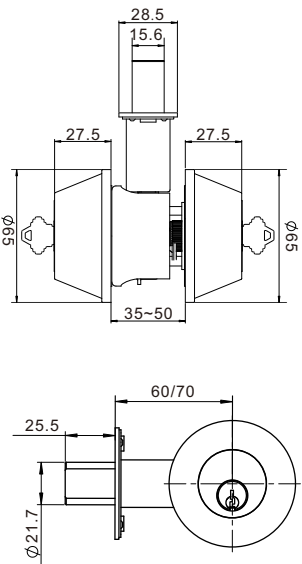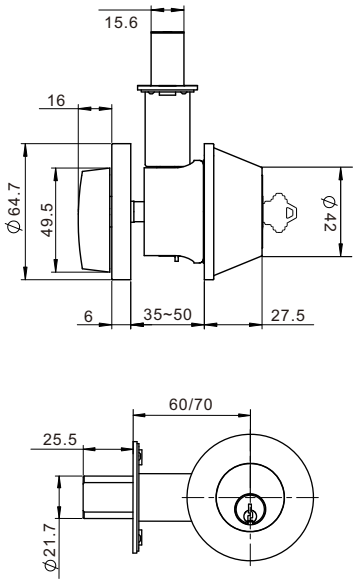


ASSEMBLING




MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
4301 Single Cylinder		Deadbolt by outside key or inside thumb turn. 60mm Fixed or 70mm Fixed or 67mm Fixed(60/70mm).	4312 Double Cylinder		Deadbolt by key either side 60mm Fixed or 70mm Fixed or 67mm Fixed(60/70mm).

HIGH SECURITY CYLINDERS

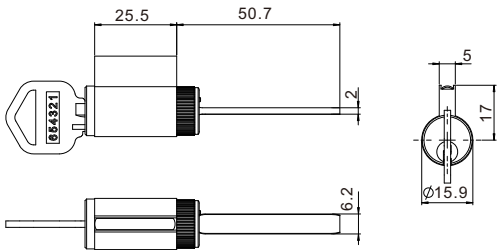

DOOR PREPARATION

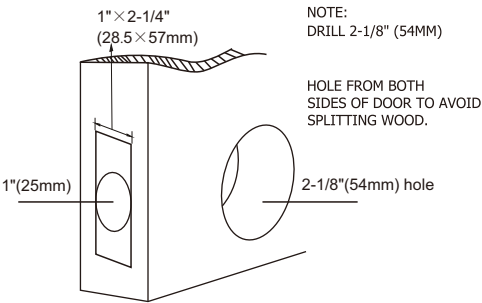

LATCH OPTIONAL



60mm latch
CODE: CDL60SS



70mm latch
CODE: CDL70SS



60/70mm adjustable latch
CODE: CDL67SS




60/70mm G2 Adjustable
Commercial Smart Deadbolt
CODE: 4301DE67Z1-SS

HOW TO ORDER

Example: MODEL: 4301SS
(US32D), 2PC KW Keys, adj 60/70 mm latch.

P.S.: The Finish ,Keyway and Package optional in page 01




LIGHT DUTY COMMERCIAL DEADBOLT-ANSI GRADE 2

**Special Design for Heavy-Duty, Commercial Quality,
Meets with ANSI A156.2 Grade 2. Exceeds 450,000 Cycles.**



- **Door Prep:** Cross bore 1"(25mm), Edge bore 1"(25mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 2"(50mm) thick.
- **Backset:** 2-3/4"(70mm) or 2-3/8"(60mm) fixed standard, adjustable 60/70mm optional.
- **Latch:** Full 1"(25mm) throw deadbolt with hardened bolt.
- **Cylinder:** 6-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1-1/8"2-1/4"(28.5×57mm) standard.
- **Strikes:** Square corner 1-1/8" ×2-3/4"(28.5×70mm) standard.



DEADBOLT

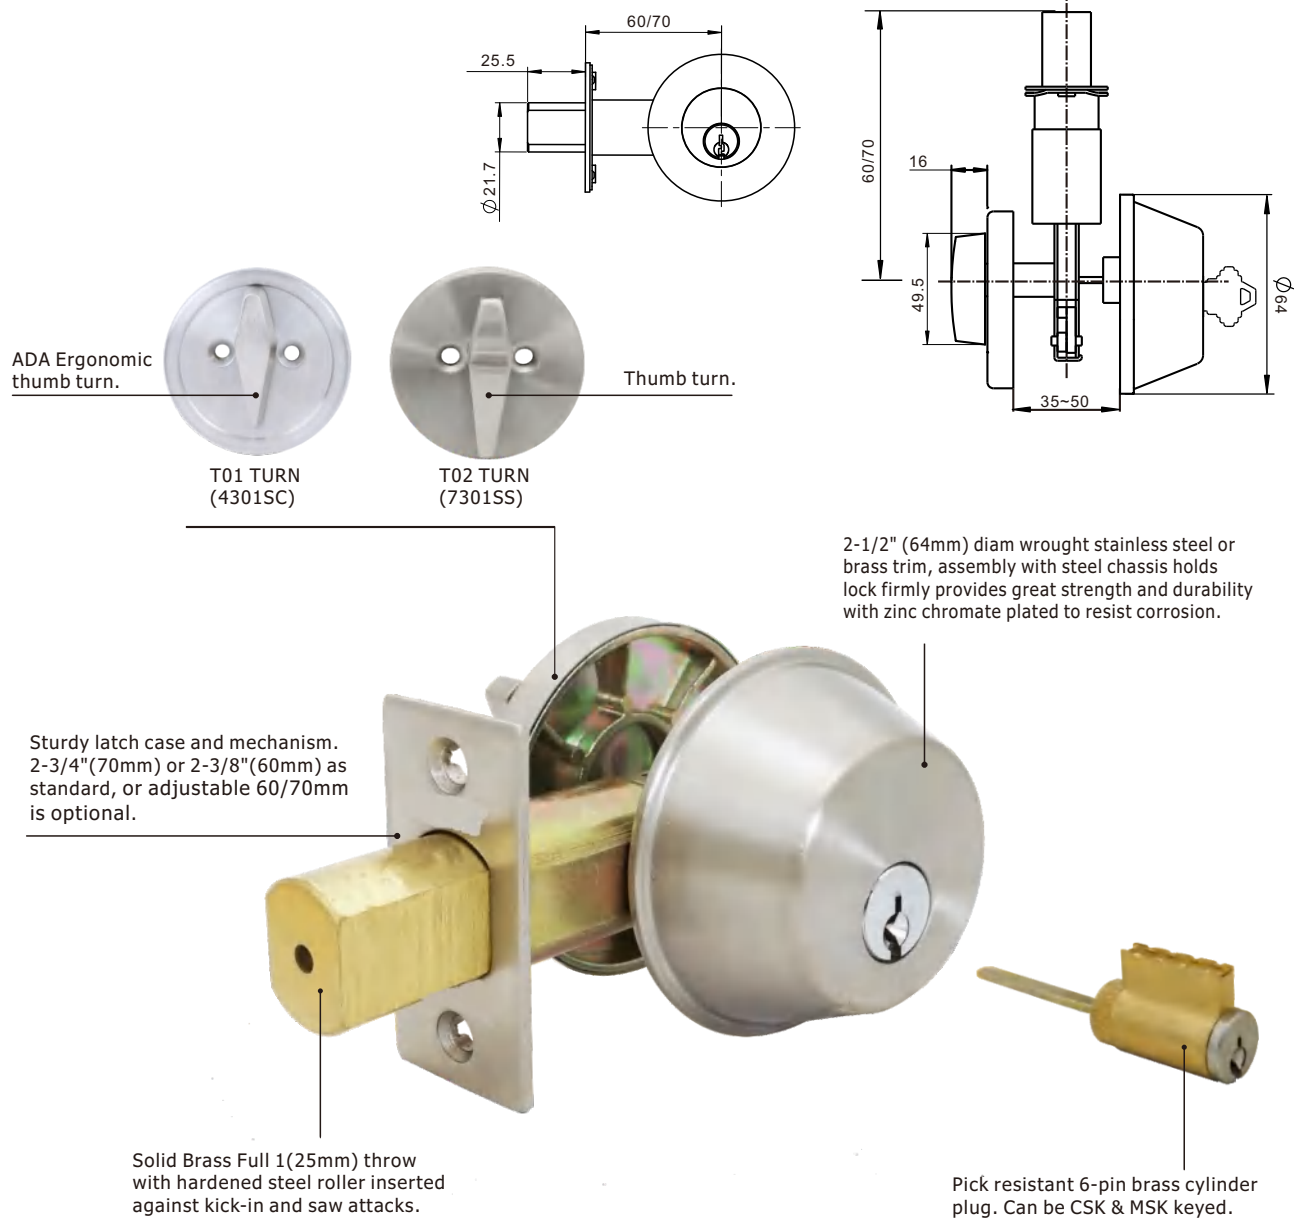


4331SS(Single Cylinder)

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
4331 Single Cylinder		Deadbolt by outside key or inside thumbturn 60mm Fixed or 70mm Fixed or 67mm Fixed(60~70mm).	4332 Double Cylinder		Deadbolt by key either side 60mm Fixed or 70mm Fixed or 67mm Fixed(60~70mm).

PHYSICAL DISPLAY





4331SS
 (Single Cylinder)

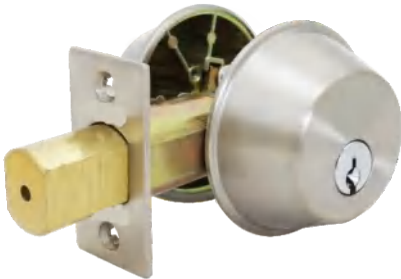

4332SS
 (Double Cylinder)


HIGH SECURITY CYLINDERS
 DOOR PREPARATION

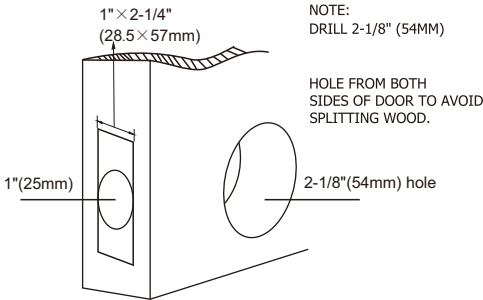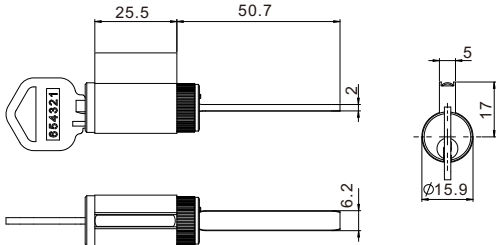

LATCH OPTIONAL



60mm latch
 CODE: CDL60SS



70mm latch
 CODE: CDL70SS



60/70mm adjustable latch
 CODE: CDL67SS



60/70mm G2 Adjustable
 Commercial Smart Deadbolt
 CODE: 4301DE67Z1-SS

HOW TO ORDER

Example: MODEL: 4331SS
 (US32D), 2PC KW Keys, adj 60/70 mm latch.

P.S.: The Finish ,Keyway and Package optional in page 01

CODE: 4 33 1 SS

Finish
 Function
 Type
 Series


STANDARD DUTY DEADBOLT- GRADE 3

Special Design for Standard-Duty, Meets with ANSI A156.2 Grade 3.



- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"x2-1/4"(25.4x57mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 2"(50mm) thick.
- **Backset:** Adjustable 2-3/8"(60mm) standard or 2-3/4"(70mm).
- **Latch:** Full 1"(25mm) throw deadbolt with hardened bolt. Grade 3 adjustable 60/70mm or Grade 2 60 or 70mm (C60,C70) or Grade 2 adjustable 60/70mm (C67) Optional.
- **Cylinder:** 5-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner optional.
- **Strikes:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner optional.



DEADBOLT

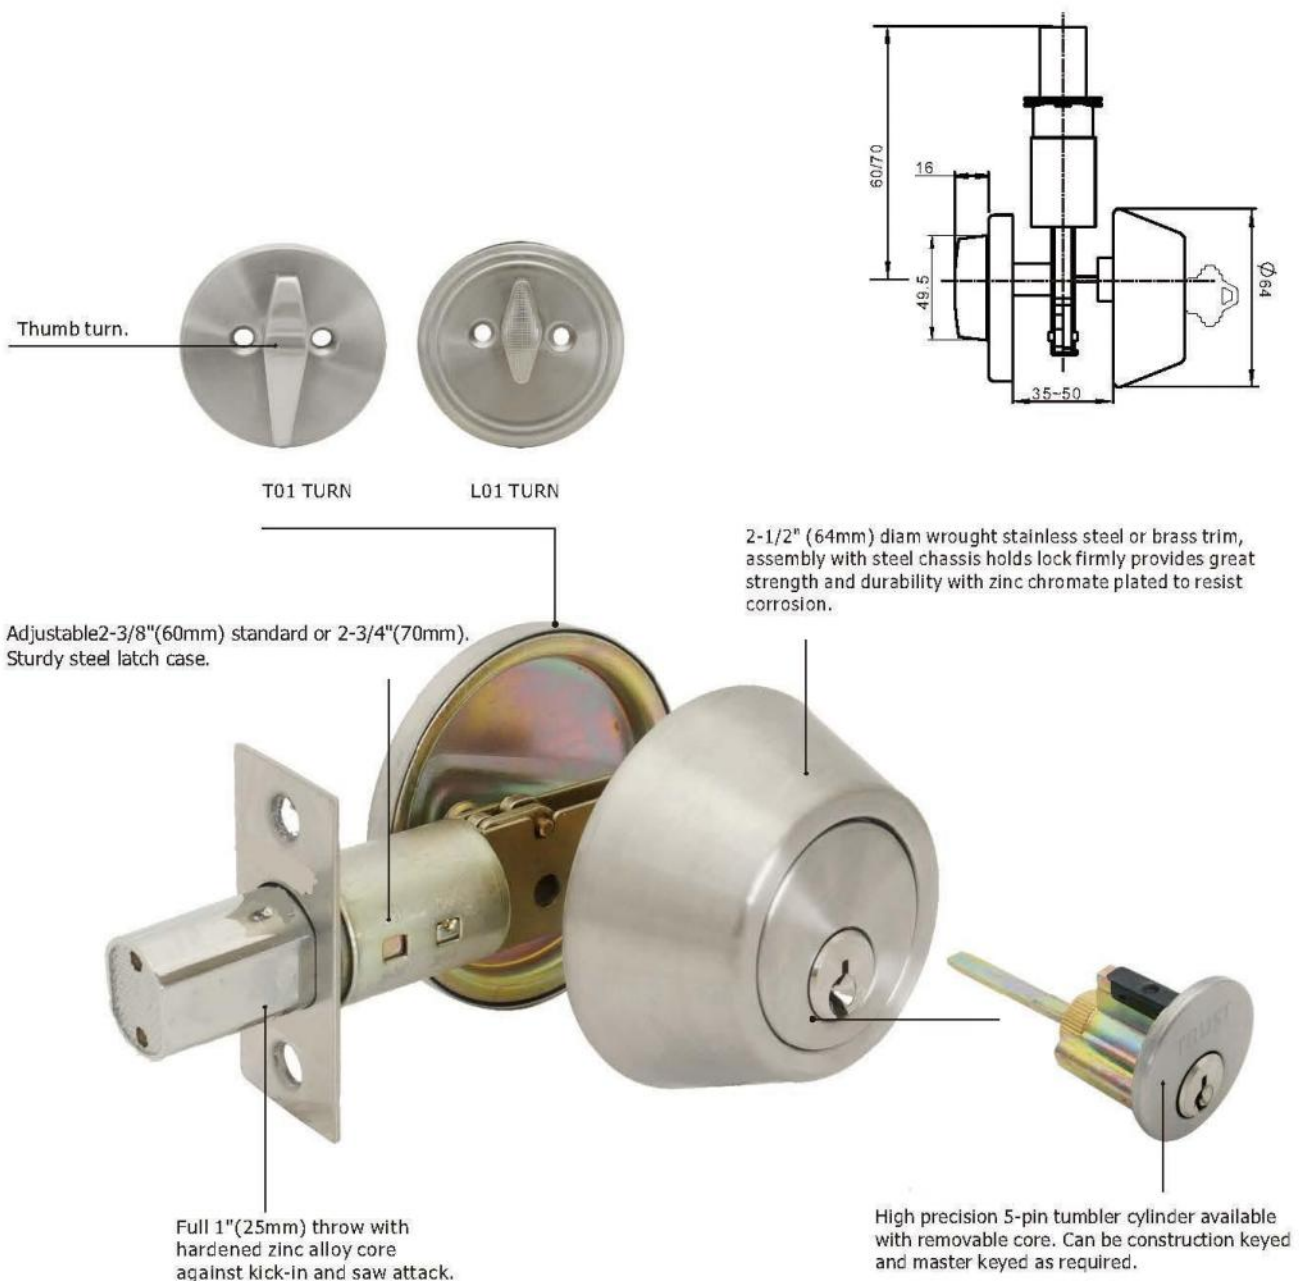

7301SS(Single Cylinder)

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
7301 Single Cylinder		Deadbolt by outside key or inside thumb turn. Grade 3 adjustable 60/70mm or Grade 2 60mm or 70mm or Grade 2 adjustable 60/70mm	7312 Double Cylinder		Deadbolt by key either side Grade 3 adjustable 60/70mm or Grade 2 60mm or 70mm or Grade 2 adjustable 60/70mm

PHYSICAL DISPLAY



7301SS-C60
(Single Cylinder)
Grade 2 70mm Latch Fixed



7312AC Square Corner
(Double Cylinder)



7303PB Square Corner
(One Side Deadbolt)

CYLINDER




7301 core



7312 core

DOOR PREPARATION

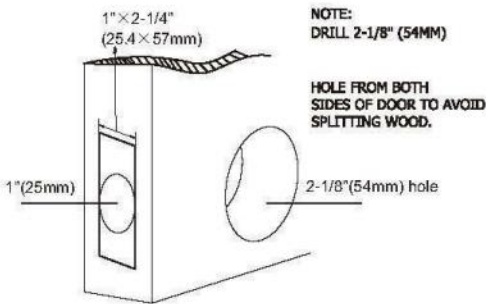

LATCH OPTIONAL



Grade 3 adjustable
60/70mm latch
CODE: CDL60SS



Grade 2 60 or 70mm latch
CODE: CDL60SS
CODE: CDL70SS



Grade 2 adjustable
60/70mm latch
CODE: CDL67SS



60/70mm G2 Adjustable
Commercial Smart Deadbolt
CODE: 4301DE67Z1-SS

HOW TO ORDER

Example: MODEL: 7301SS
(US32D), 2PC KW Keys, Square Corner Faceplate
Grade 3 adj 60/70 mm latch, Square Corner Strike

P.S.: The Finish ,Keyway and Package optional in page 01

CODE: 7 30 1 SS

- Finish
- Function
- Type
- Series


STANDARD DUTY DEADBOLT- GRADE 3

Special Design for Standard-Duty, Meets with ANSI A156.2 Grade 3.



- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"x2-1/4"(25.4x57mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 2"(50mm) thick.
- **Backset:** Adjustable 2-3/8"(60mm) standard or 2-3/4"(70mm).
- **Latch:** Full 1"(25mm) throw deadbolt with hardened bolt. Grade 3 adjustable 60/70mm or Grade 2 60 or 70mm (C60,C70) or Grade 2 adjustable 60/70mm (C67) Optional.
- **Cylinder:** 5-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner optional.
- **Strikes:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner optional.



DEADBOLT

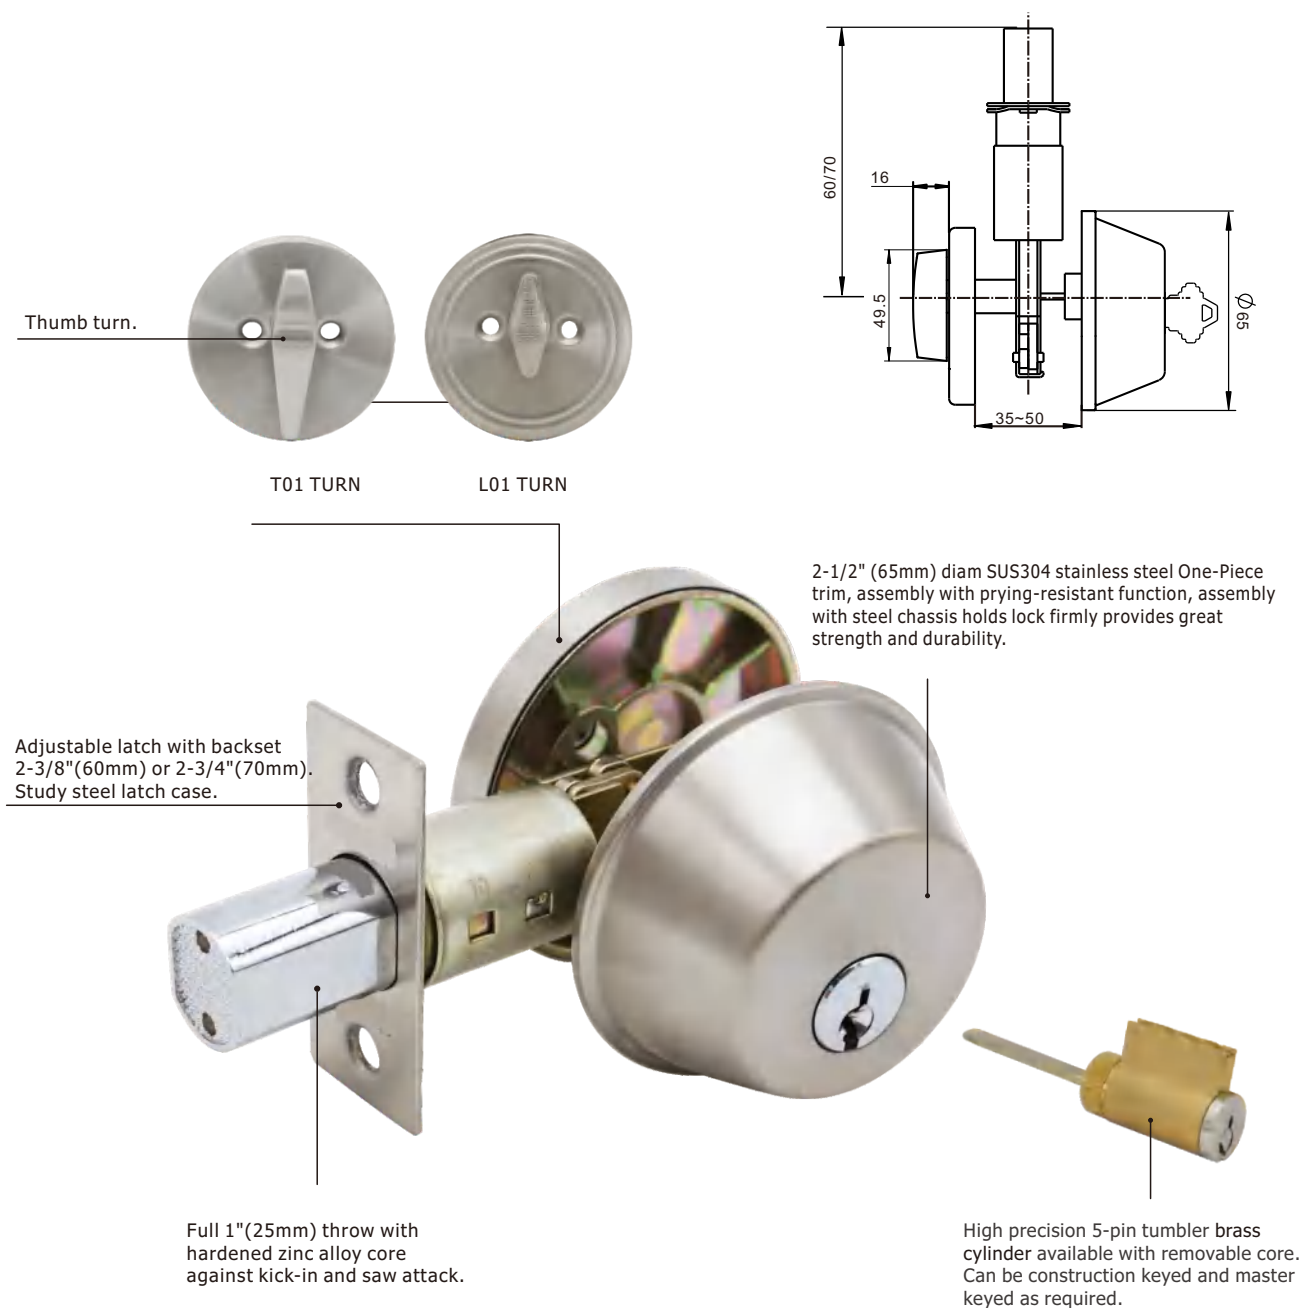

7331SS(Single Cylinder)

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
7331 Single Cylinder		Deadbolt by outside key or inside thumbturn Grade 3 or Grade 2 latch 60mm Fixed or 70mm Fixed or 67mm Fixed(60/70mm).	7332 Double Cylinder		Deadbolt by key either side Grade 3 or Grade 2 latch 60mm Fixed or 70mm Fixed or 67mm Fixed(60/70mm).

PHYSICAL DISPLAY





7331SS Square Corner
(Single Cylinder)



7332SS Square Corner
(Double Cylinder)

SECURITY CYLINDERS

DOOR PREPARATION

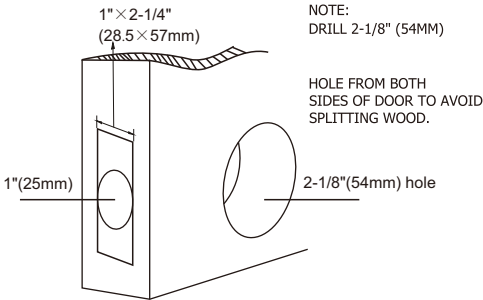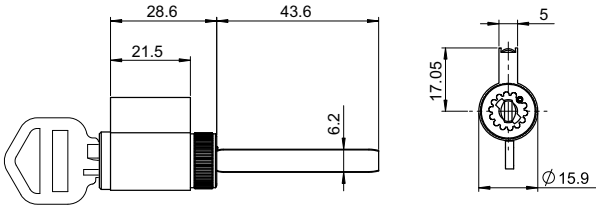

LATCH OPTIONAL



Grade 3 adjustable
60/70mm latch
CODE: CDL60SS



Grade 2 60 or 70mm latch
CODE: CDL60SS
CODE: CDL70SS



Grade 2 adjustable
60/70mm latch
CODE: CDL67SS




60/70mm G2 Adjustable
Commercial Smart Deadbolt
CODE: 4301DE67Z1-SS

HOW TO ORDER

Example: MODEL: 7331SS
(US32D), 2PC KW Keys, Square Corner Faceplate
Grade 3 adj 60/70 mm latch, Square Corner Strike

P.S.: The Finish ,Keyway and Package optional in page 01




STANDARD DUTY DEADBOLT- GRADE 3

Special Design for Standard-Duty, Meets with ANSI A156.2 Grade 3.



- **Door Prep:** Cross bore 2-1/8" (54mm), Edge bore 1" (25mm), Latch face 1"x2-1/4" (25.4x57mm).
- **Door Thick:** Fit doors 1-3/8" (35mm) to 2" (50mm) thick.
- **Backset:** Adjustable 2-3/8" (60mm) standard or 2-3/4" (70mm).
- **Latch:** Full 1" (25mm) throw deadbolt with hardened bolt. Grade 3 adjustable 60/70mm or Grade 2 60 or 70mm (C60, C70) or Grade 2 adjustable 60/70mm (C67) Optional.
- **Cylinder:** 5-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4" (25.4x57mm) standard, radius corner optional.
- **Strikes:** Square corner 1"x2-1/4" (25.4x57mm) standard, radius corner optional.



DEADBOLT

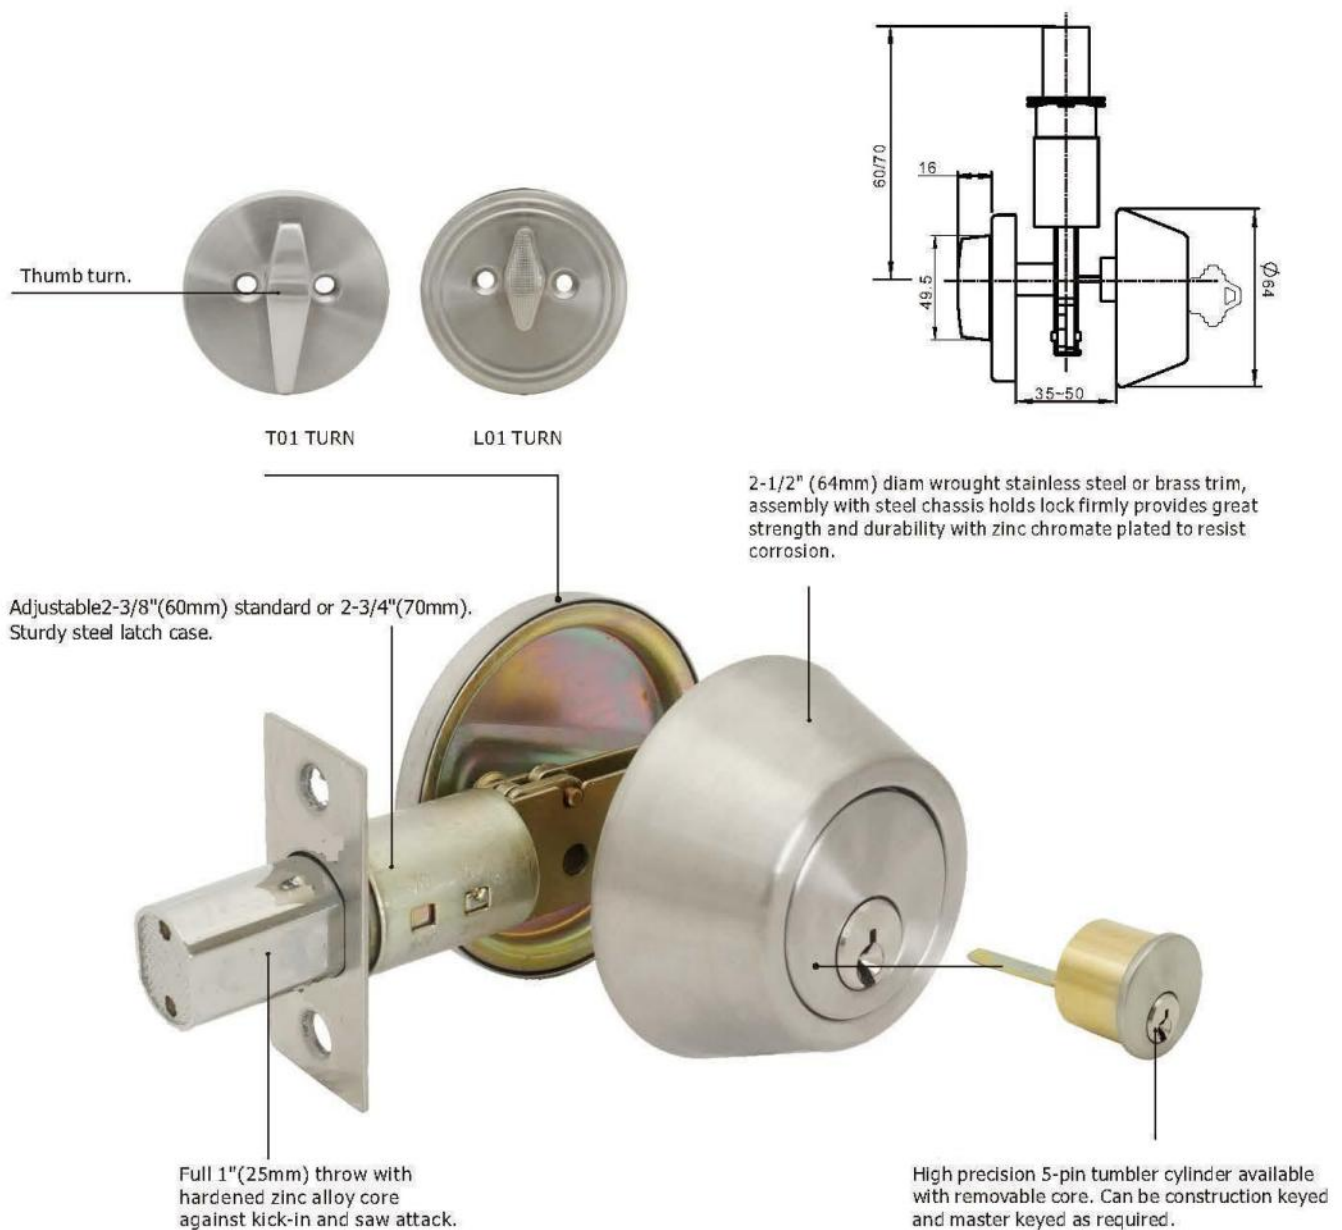

7351SS(Single Cylinder)

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
7351 Single Cylinder		Deadbolt by outside key or inside thumb turn. Grade 3 adjustable 60/70mm or Grade 2 60mm or 70mm or Grade 2 adjustable 60/70mm	7352 Double Cylinder		Deadbolt by key either side Grade 3 adjustable 60/70mm or Grade 2 60mm or 70mm or Grade 2 adjustable 60/70mm

PHYSICAL DISPLAY




7351-RB Radius Corner
(Single Cylinder)



7352SS Radius Corner
(Double Cylinder)

CYLINDER




7351 core



7352 core

DOOR PREPARATION

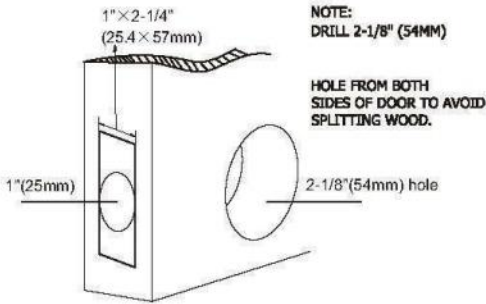

LATCH OPTIONAL



Grade 3 adjustable
60/70mm latch
CODE: CDL60SS



Grade 2 60 or 70mm latch
CODE: CDL60SS
CODE: CDL70SS



Grade 2 adjustable
60/70mm latch
CODE: CDL67SS



60/70mm G2 Adjustable
Commercial Smart Deadbolt
CODE: 4301DE67Z1-SS

HOW TO ORDER

Example: MODEL: 7351SS
(US32D), 2PC KW Keys, Square Corner Faceplate
Grade 3 adj 60/70 mm latch, Square Corner Strike

P.S.: The Finish ,Keyway and Package optional in page 01

CODE: 7 35 1 SS

Finish
Function
Type
Series

STANDARD DUTY DEADBOLT- GRADE 3

Special Design for Standard-Duty, Meets with ANSI A156.2Grade 3.



- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"×2-1/4" (25×57mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 1-3/4"(45mm) thick.
- **Backset:** Adjustable 2-3/8"(60mm) standard or 2-3/4"(70mm)
- **Latch:** Full 1"(25mm) throw deadbolt with hardened bolt.
- **Faceplate:** Changeable Square corner 1"x2-1/4"(25x57mm) as standard, radius corner optional.
- **Cylinder:** Cylinder optional see in page 1.




SINGLE CYLINDER




7361SC(Single Cylinder)

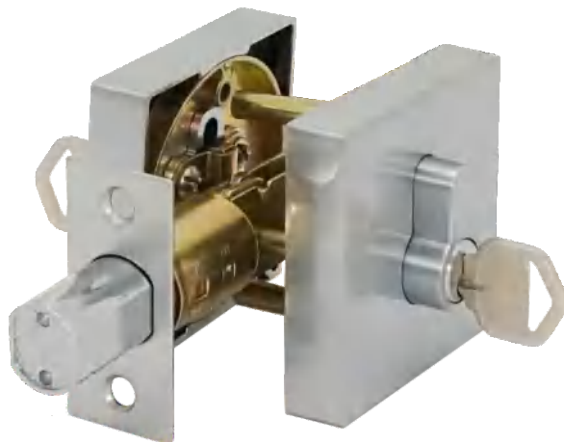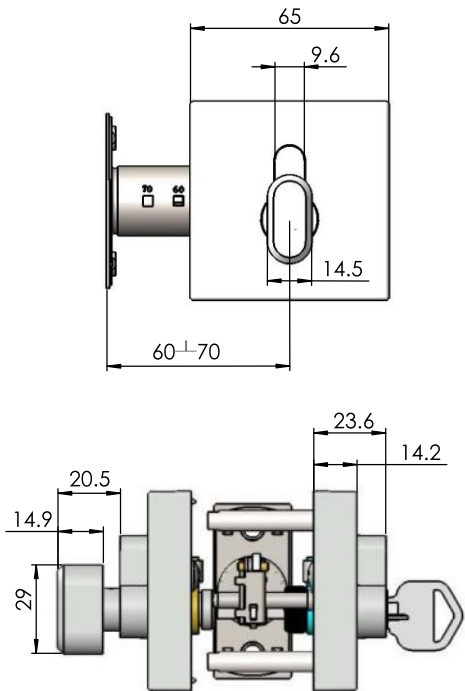

7362SC(Double Cylinder)

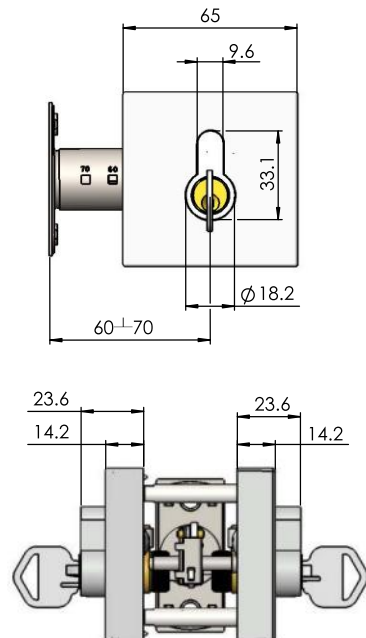

ASSEMBLING

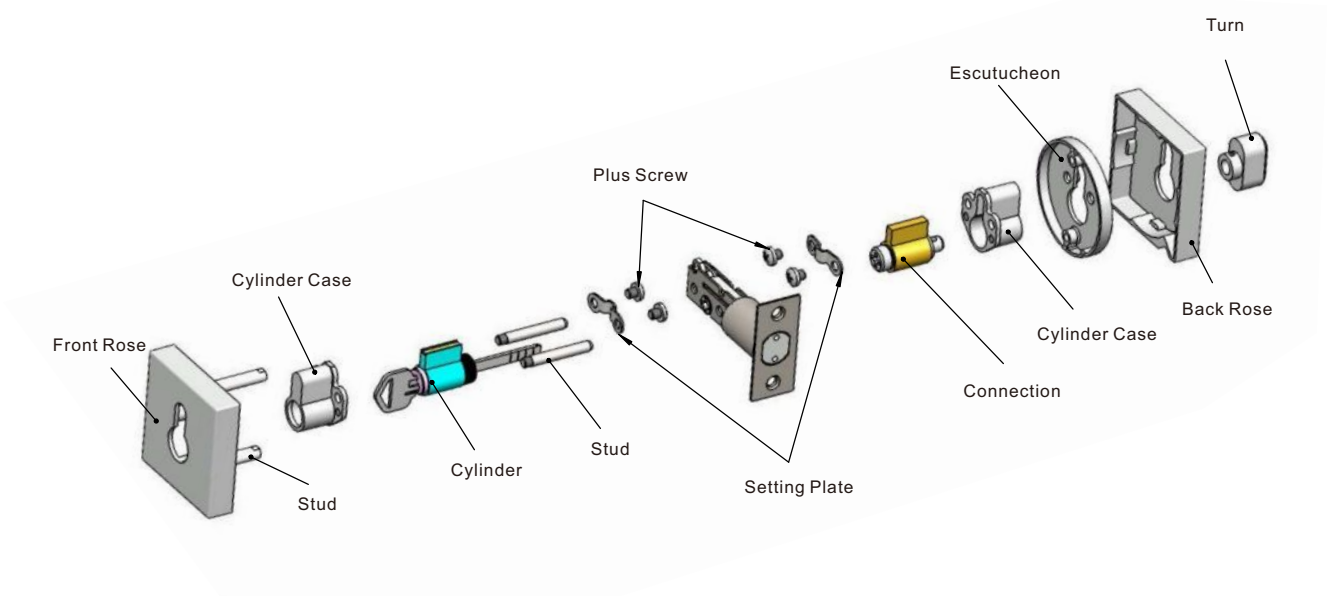

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
7361 Single Cylinder		Deadbolt by outside key or inside thumb turn. Grade 3 adjustable 60/70mm or Grade 2 60mm or 70mm or Grade 2 adjustable 60/70mm	7362 Double Cylinder		Deadbolt by key either side Grade 3 adjustable 60/70mm or Grade 2 60mm or 70mm or Grade 2 adjustable 60/70mm

LATCH OPTIONAL



Grade 3 adjustable
60/70mm latch
CODE: CDL60SS



Grade 2 60 or 70mm latch
CODE: CDL60SS
CODE: CDL70SS



Grade 2 adjustable
60/70mm latch
CODE: CDL67SS



60/70mm G2 Adjustable
Commercial Smart Deadbolt
CODE: 4301DE67Z1-SS

HOW TO ORDER

Example: MODEL: 7361SC
(US26D), 2PC KW Keys, Square Corner Faceplate
Grade 3 adj 60/70 mm latch, Square Corner Strike

P.S.: The Finish ,Keyway and Package optional in page 01



CODE: 7 36 1 SC

Finish
Function
Type
Series

TUBULAR LEVER SERIES

Special Design for Heavy duty.
Meets with ANSI A156.2 Grade 3. Exceeds 250,000 cycles.


- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"x 2-1/4"(25.4x57mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 2"(50mm) thick.
- **Latch:** Adjustable 2-3/8"(60mm) standard or 2-3/4"(70mm) optional.
- **Cylinder:** 5-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Strikes:** T-Strike 1-1/2"x2-3/4" (38x70mm) standard, D-Strike 1-1/2" x 2-1/4"(39.5x57mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage).

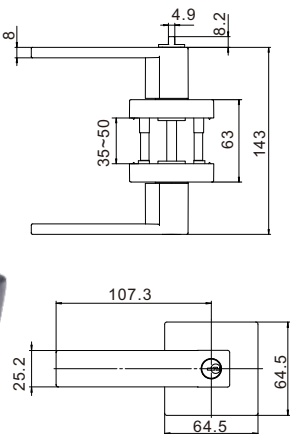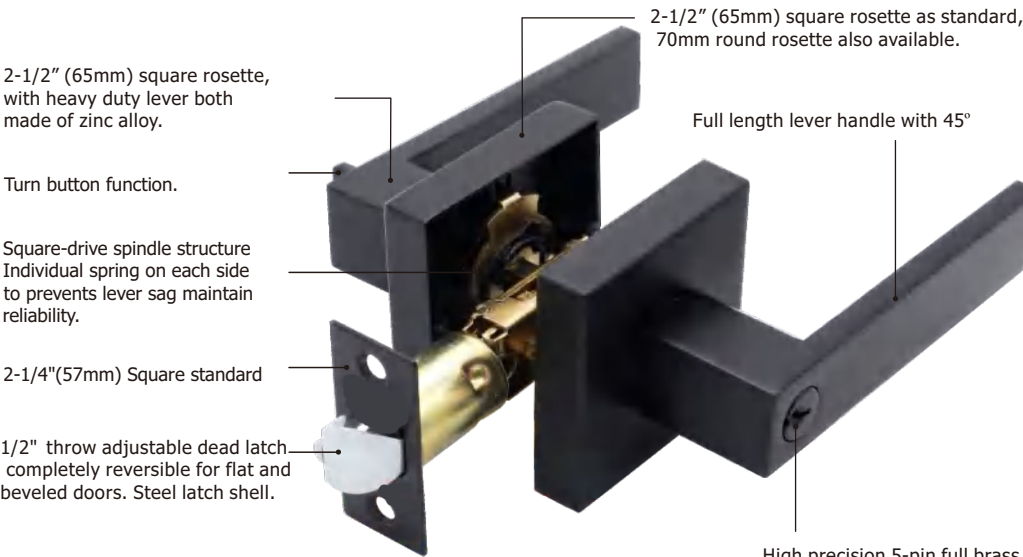


6911MB-ET

LEVER HANDLE OPTIONAL


ROSE OPTIONAL




6911MB






6931RB



Square



Round

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
6911 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	6913 Passage(PS)		Both levers always unlocked.
6912 Bathroom(BK)		Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.	6910 Dummy(DM)		Dummy trim for oneside of door pull function.

PRODUCT ITEM



6931RB-ET



6912SN-BK




6913CP-PS




6910MB-DM


STRIKE OPTIONAL



T-Strike



D-Strike

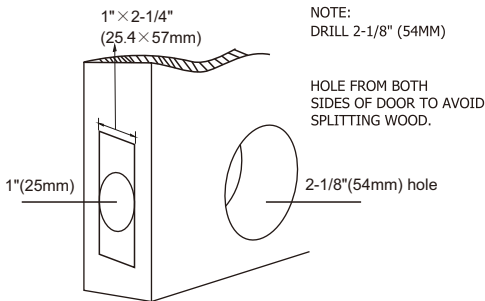

HOW TO ORDER

Example: MODEL: 6911SN-ET
(US15), Entry 2PC KW Keys, Square Rose,
adj 60/70 mm latch, D-Strike

P.S.: The Finish ,Keyway and Package optional in page 01

CODE: 6 91 1 SN

- 6: Series
- 91: lever Type
- 1: Function
- SN: Finish

TUBULAR LEVER SERIES

Special Design for Standard duty.
Meets with ANSI A156.2 Grade 3. Exceeds 250,000 cycles.

- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"x2-1/4"(25.4x57mm).
- **Door Thick:** Fitdoors 1-3/8"(35mm) to 2"(50mm) thick.
- **Latch:** Adjustable 2-3/8"(60mm) or 2-3/4"(70mm).
- **Cylinder:** 5-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner also available.
- **Strikes:** T-Strike 1-1/2"x2-3/4" (38x70mm) standard, D-Strike 1-1/2" x 2-1/4"(39.5x57mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage).



2-1/2" (65mm) square rosette, with heavy duty lever both made of zinc alloy,

Turn button function.


Square-drive spindle structure
Individual spring on each side to prevents lever sag maintain reliability.

1/2" throw adjustable dead latch completely reversible for flat and beveled doors. Steel latch shell.

2-1/2" (65mm) square rosette as standard, 70mm round rosette also available.


Extra long Zinc Alloy lever for easy operation.

High precision 5-pin tumbler brass cylinder can be construction keyed and master keyed as required.

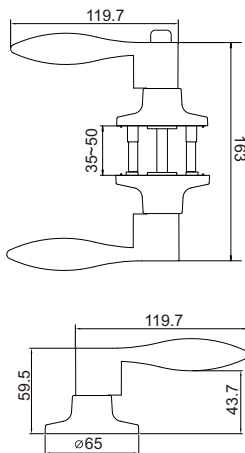


6461MB-ET


LEVER HANDLE OPTIONAL




6413RB




6422MB




6481SN



6432SN



6463RB



6491SN

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
6461 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	6463 Passage(PS)		Both levers always unlocked.
6462 Bathroom(BK)		Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.	6460 Dummy(DM)		Dummy trim for oneside of door pull function.

PRODUCT ITEM



6461AB-ET



6462MB-BK




6463SN-PS




6460RB-DM

STRIKE OPTIONAL




T-Strike



D-Strike


DOOR PREPARATION

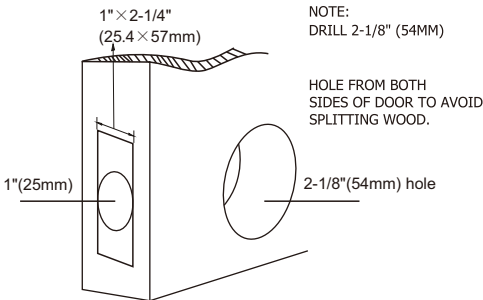

HOW TO ORDER

Example: MODEL: 6461SN-ET
(US15), Entry 2PC KW Keys, Square Faceplate
adj 60/70mm latch, D-Strike

P.S.: The Finish ,Keyway and Package optional in page 01



CYLINDRICAL LEVER SERIES

Special Design for Standard duty.
Meets with ANSI A156.2 Grade 3. Exceeds 250,000 cycles.

- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"x2-1/4"(25.4x57mm).
- **Door Thick:** Fitdoors 1-3/8"(35mm) to 2"(50mm) thick.
- **Latch:** 2-3/4"(70mm) or 2-3/8"(60mm) fixed standard, adjustable 60/70mm optional.
- **Cylinder:** 5-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner also available.
- **Strikes:** T-Strike 1-1/2"x2-3/4" (38x70mm) standard, D-Strike 1-1/2" x 2-1/4"(39.5x57mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage), ST(4:Storeroom).




Wrought stainless steel or brass trim,
assembly with steel chassis holds lock firmly
provides great strength and durability with
zinc chromate plated to resist corrosion.

Push in and turn button function.


1"x2"-1/4"(25x57mm) Square
standard, round corner also available.

1/2" throw dead latch completely
reversible for flat and beveled doors.

Cylindrical body provides great
strength and durability.

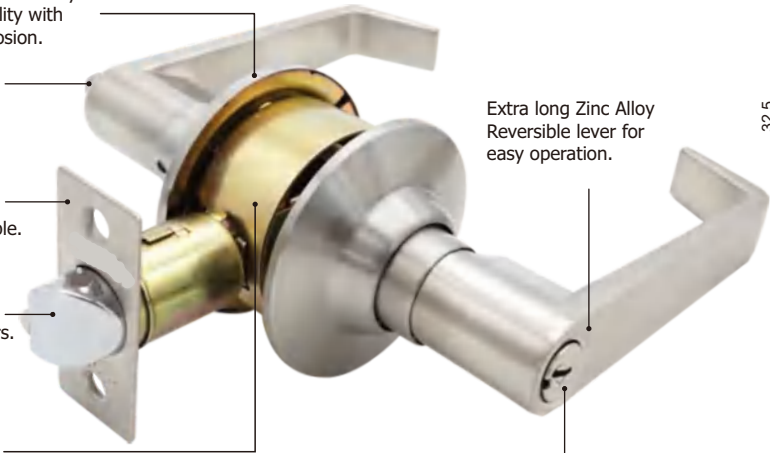


Extra long Zinc Alloy
Reversible lever for
easy operation.

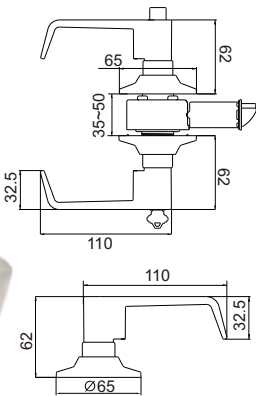


High precision 5-pin tumbler brass cylinder.
Brass key nickel plated can be construction
keyed and master keyed as required.

3431SN-ET


LEVER HANDLE OPTIONAL




3413RB




3422MB




3481SN



3432SN



3463RB



3491SN

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
3431 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	3433 Passage(PS)		Both levers always unlocked.
3432 Bathroom(BK)		Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.	3430 Dummy(DM)		Dummy trim for oneside of door pull function.




PHYSICAL DISPLAY

3431MB-ET	3432RB-BK	3433SN-PS	3430SN-DM

LATCH OPTIONAL

60mm Square Corner latch CODE: CL60SN-ET	70mm Square Corner latch CODE: CL70SN-ET	60/70mm Radius Corner adjustable latch CODE: CL67SN-ET


STRIKE OPTIONAL

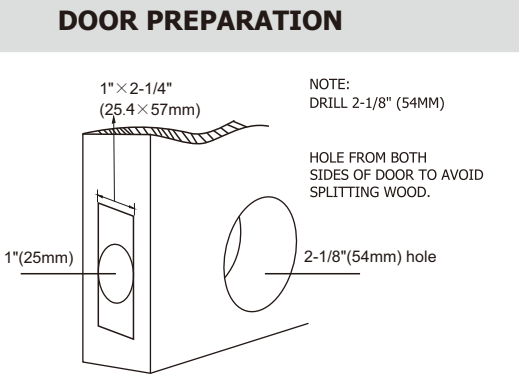

HOW TO ORDER

Example: MODEL: 3431SN-ET
(US15), Entry 2PC KW Keys, Square Faceplate
60mm latch, D-Strike

P.S.: The Finish ,Keyway and Package optional in page 01



TUBULAR KNOB SERIES-SQUARE-DRIVE SPINDLE

Special design for Standard Duty.
Meets with ANSI A156.2 Grade 3. Exceeds 250,000 cycles.

- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"x2-1/4"(25.4x57mm).
- **Door Thick :** Fit doors 1-3/8"(35mm) to 2"(50mm) thick.
- **Latch:** Adjustable 2-3/8"(60mm) or 2-3/4"(70mm);
6 way latch. (Fits 2-3/8" and 2-3/4" backset latch bolt + Square corner & 1/4" Radius Latch plate with re-changeable Type + Square & Radius Strike Plate, both required).
- **Handing:** Completely reversible.
- **Cylinder:** 5-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner also available.
- **Strikes:** T-Strike 1-1/2"x2-3/4" (38x70mm) standard, D-Strike 1-1/2" x 2-1/4"(39.5x57mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage).



Steel mounting plate holds lock firmly in place stainless steel or brass roses



Turn button function

Full lip 2-1/4" (57mm)
Square standard,
round corner also available

1/2" Throw adjustable dead latch completely reversible for flat and beveled doors. Steel latch shell

All steel rack and cam mechanism provide long lifetime.


Cylinder knob removable for re-keying or replacement




5-pin tumbler brass cylinder. Brass key nickel plated can be construction keyed and master keyed as required.

6871SS-ET


KNOB OPTIONAL




6871SS




6351AC




6111AB




6361PB




6712PB






6882AC



6381PB



6101SS

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
6871 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	6873 Passage(PS)		Both levers always unlocked.
6872 Bathroom(BK)		Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.	6870 Dummy(DM)		Dummy trim for oneside of door pull function.

PHYSICAL DISPLAY



6871SS-ET



6872AB-BK




6873SS-PS




6870SS-DM

STRIKE OPTIONAL




T-Strike



D-Strike

DOOR PREPARATION

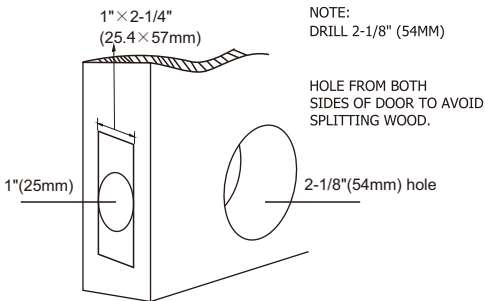

HOW TO ORDER

Example: MODEL: 6871SS-ET
(US32D), Entry 2PC KW Keys, Square Corner
adj 60/70 mm latch, D-Strike

P.S.: The Finish ,Keyway and Package optional in page 01

CODE: 6 87 1 SS

Finish

Function

Knob Type

Series

CYLINDRICAL KNOB SERIES

Special design for Standard Duty.
Meets with ANSI A156.2 Grade 3. Exceeds 250,000 cycles.

- **Door Prep:** Cross bore 2-1/8"(54mm), Edge bore 1"(25mm), Latch face 1"x2-1/4"(25.4x57mm).
- **Door Thick :** Fit doors 1-3/8"(35mm) to 2"(50mm) thick.
- **Backset:** 2-3/4"(70mm) standard. 2-3/8"(60mm) optional.
- **Latch:** 2-3/4"(70mm) or 2-3/8"(60mm) fixed standard, adjustable 60/70mm optional.
- **Cylinder:** 5-pin or 6-pin removable core, Schlage C Keyway or Kwikset, or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25.4x57mm) standard, radius corner also available.
- **Strikes:** T-Strike 1-1/2"x2-3/4" (38x70mm) standard, D-Strike 1-1/2" x 2-1/4"(39.5x57mm) optional.
- **Function:** DM(0:Dummy), ET(1:Entrance), BK(2:Privacy), PS(3:Passage), ST(4:Storeroom).





Wrought stainless steel or brass trim, with steel chassis holds lock firmly with zinc chromate plated to resist corrosion.

Push in button function.

Full lip 2-1/4" (25x57mm)
Square standard,
round corner also available.


1/2" Throw dead latch
completely reversible
for flat and beveled doors
steel latch shell.

2-3/8"(60mm) as standard;
2-3/4" (70mm) latch optional
UL optional.

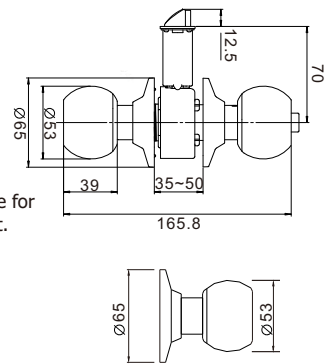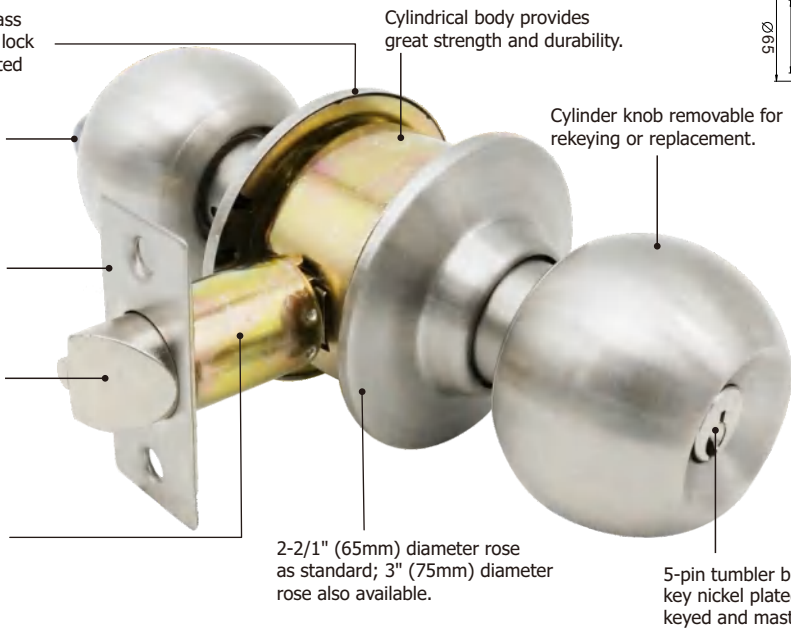


3871SS-ET


KNOB OPTIONAL




3871RB




3351SS




3371SS




3361AB




3881SS







3112SS



3711PB



3691PB

MODEL FUNCTION	IMAGE	DESCRIPTION	MODEL FUNCTION	IMAGE	DESCRIPTION
3871 Entrance(ET)		Pushing/turning button locks outside lever only if use key to release the button or tuning inside lever to unlock the lock.	3873 Passage(PS)		Both levers always unlocked.
3872 Bathroom(BK)		Can be opened from outside when turning emergency lot, Pushing/turning button locks outside lever, turning inside lever to release button.	3874 Storeroom(ST)		Inside lever always Free, Outside lever fixed and unlocks by key only.
			3870 Dummy(DM)		Dummy trim for oneside of door pull function.




PRODUCT ITEM



LATCH OPTIONAL



STRIKE OPTIONAL

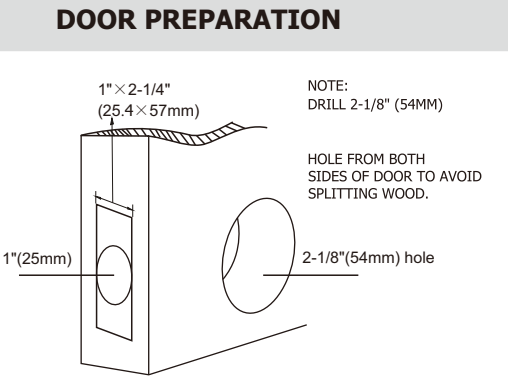

HOW TO ORDER

Example: MODEL: 3871SS-ET
(US32D), Entry 2PC KW Keys, Square Corner
adj 60/70 mm latch, D-Strike

P.S.: The Finish ,Keyway and Package optional in page 01

CODE: 3 87 1 SS

Finish

Function

Knob Type

Series

GRADE 1&2 CYLINDRICAL LATCH SERIES



60mm G1 commercial latch
CODE: CCL61-ET-SS



70mm G1 commercial latch
CODE: CCL71-ET-SS



60mm G2 commercial latch
CODE: CCL62-ET-SS



70mm G2 commercial latch
CODE: CCL72-ET-SS

DEADBOLT LATCH SERIES



60-70mm G3 Adjustable Deadbolt
CODE: DL67-MB



60mm G2 Commercial Deadbolt
CODE: CDL60-SS



70mm G2 Commercial Deadbolt
CODE: CDL70-SS



60/70mm G2 Adjustable
Commercial Deadbolt
CODE: CDL67-SS



60/70mm G2 Adjustable
Commercial Smart Deadbolt
CODE: 4301DE67ZX-SS



60/70mm G2 Adjustable
Commercial Smart Deadbolt
CODE: 4301DE67Z1-SS

TUBULAR LATCH SERIES



60/70mm G3 Adjustable
tubular RADIUS Latch
CODE: STL6070-ET-SS



60/70mm G3 Tubular 45 Degree
Adjustable tubular SQUARE Latch
CODE: STL60/70-SS



60/70mm G3 6 WAY
Adjustable tubular SQUARE Latch
CODE: STL60/70-6W-ET-SS



60/70mm G3 Adjustable
tubular RADIUS Latch
CODE: RTL60/70-ET-MB



60/70mm G3 Adjustable
tubular SQUARE drive-in Latch
CODE: SDL60/70-BK

GRADE 3 CYLINDRICAL LATCH SERIES



Square Corner
60mm G3 Cylindrical Latch
CODE: CL60-ET-SS



Square Corner
70mm G3 Cylindrical Latch
CODE: CL70-ET-SS



Radius Corner
60/70mm G3 Adjustable
Cylindrical Latch
CODE: CL60/70-ET-SS



85mm G3 commercial Latch
CODE: CL85-ET-SS



95mm G3 commercial Latch
CODE: CL90-ET-SS



127mm G3 Cylindrical Latch
CODE: CL127-ET-SS

ZH LATCH SERIES



60mm backset Passage Latch
CODE: TL60PS-SS



60mm backset Privacy Latch
CODE: PL60BK-SS



Fixing Cap For Both
Privacy/Passage Latch
CODE: PL60A-SS



Security Latch SUS304 material
CODE: SR Latch-SS



Zinc Alloy material
CODE: ZS45SS




Zinc Alloy material
CODE: ZS60SS


STRIKE SERIES




Grade 2 ASA Strike
CODE: ASA4571SS





Grade 2 T Strike
CODE: TSK4471SS




Square Corner
Full Lip T Strike
CODE: TSK3871S-SS



Radius Corner
Full Lip D Strike
CODE: DSK6871R-SS




Radius Corner
(Square Corner optional)
DeadBolt Lock Strike
CODE: SK7301R-SS



Square Corner
(Radius Corner optional)
CODE: 4301DE67ZXFSS



Square Corner
Full Lip D Strike
CODE: DSKZH036SS





8501 SERIES


Solid Brass Pitcher Handleset Meets ANSI A156.2 Grade 3

- **Door Prep:** Cross bore 2-1/8" (54mm) , Edge bore 1" (25mm) , Latch face 1"x2-1/4" (25x57mm).
- **Door Thick:** Fit doors 1-3/8" (35mm) to 2-3/8" (45mm) thick.
- **Backset:** Adjustable 2-3/8" (60mm) or 2-3/4" (70mm).
- **Latch:** Full 1" (25mm) throw deadbolt with hardened bolt; 1/2" throw spring latch smooth operated by thumb piece on outside and knob on inside .
- **Cylinder:** 5 or 6 pin removable core, Schlage C Keyway or Kwikset or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4" (25x57mm) as standard.
- **Strike:** Full lip 1"x2-1/4" (25x57mm) square corner standard; radius corner also available.

CODE: **8 50 1 -K87-AB**

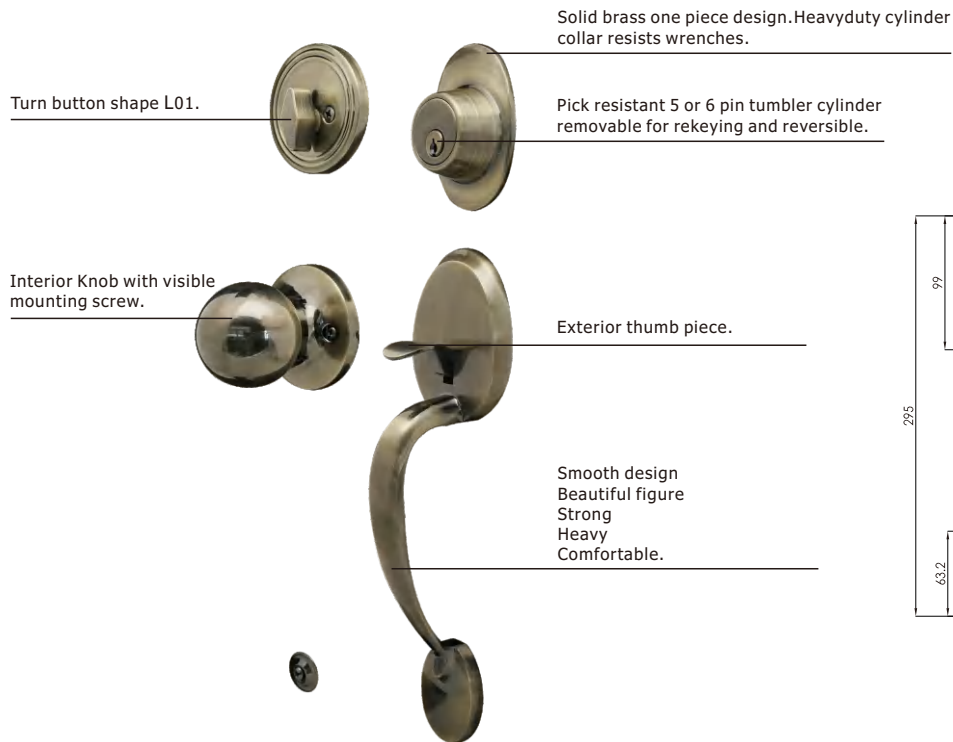

8501-K87-AB

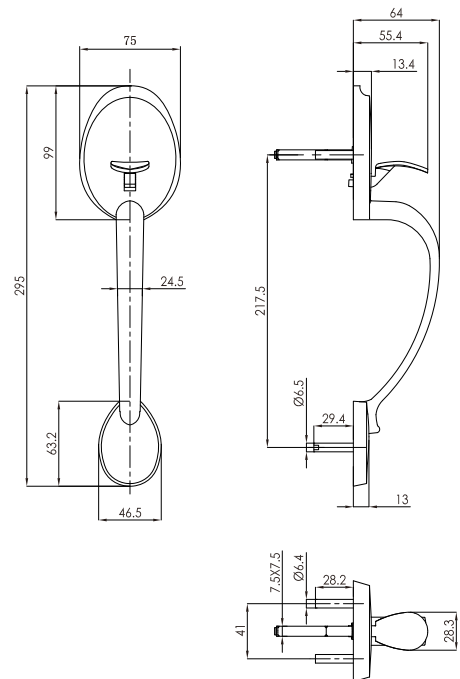

8501-K87-SN







8501-L43-SN

8501 SERIES

Zinc Alloy Pitcher Handleset Meets ANSI A156.2 Grade 3

- **Door Prep:** Cross bore 2-1/8"(54mm) , Edge bore 1"(25mm) , Latch face 1"x2-1/4"(25x57mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 2-3/8"(45mm) thick.
- **Backset:** Adjustable 2-3/8"(60mm) or 2-3/4"(70mm).
- **Latch:** Full 1"(25mm) throw deadbolt with hardened bolt; 1/2" throw spring latch smooth operated by thumb piece on outside and knob on inside .
- **Cylinder:** 5 or 6 pin removable core, Schlage C Keyway or Kwikset or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25x57mm) as standard.
- **Strike:** Full lip 1"x2-1/4"(25x57mm) square corner standard; radius corner also available.

CODE: **8 50 1 Z-K87-AB**

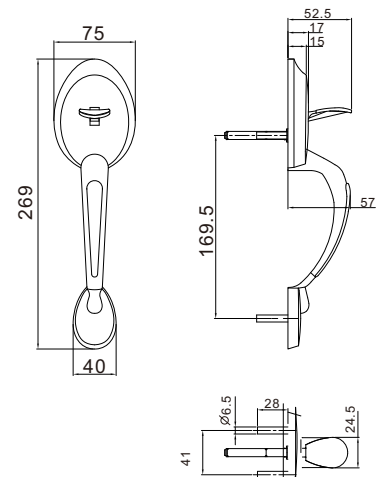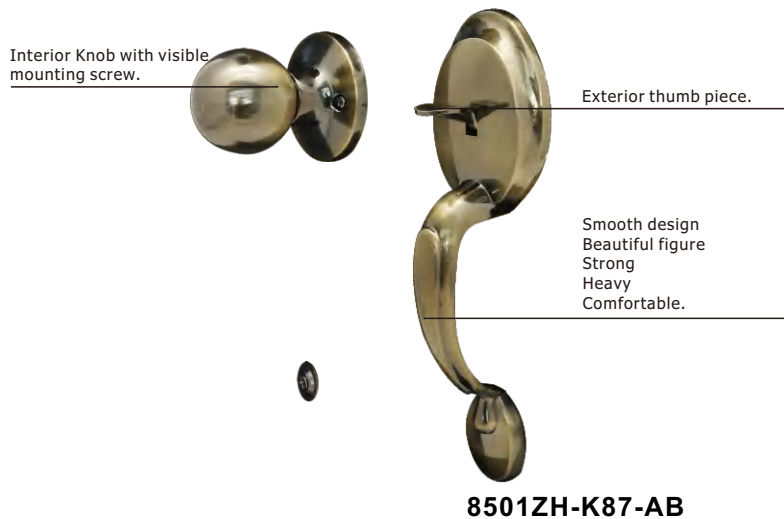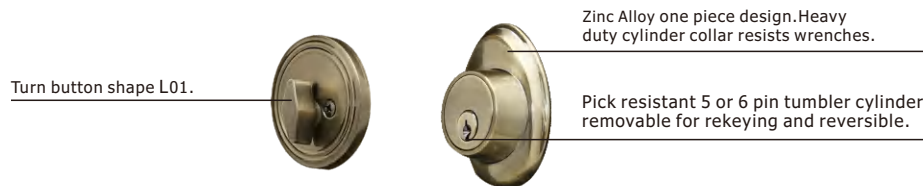


8531 SERIES

Solid Brass Pitcher Handleset Meets ANSI A156.2 Grade 3

- **Door Prep:** Cross bore 2-1/8" (54mm) , Edge bore 1" (25mm) , Latch face 1"x2-1/4" (25x57mm).
- **Door Thick:** Fit doors 1-3/8" (35mm) to 2-3/8" (45mm) thick.
- **Backset:** Adjustable 2-3/8" (60mm) or 2-3/4" (70mm).
- **Latch:** Full 1" (25mm) throw deadbolt with hardened bolt; 1/2" throw spring latch smooth operated by thumb piece on outside and knob on inside .
- **Cylinder:** 5 or 6 pin removable core, Schlage C Keyway or Kwikset or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4" (25x57mm) as standard.
- **Strike:** Full lip 1"x2-1/4" (25x57mm) square corner standard; radius corner also available.

CODE: **8 50 1 -L03-SN**



Solid brass one piece design. Heavy duty cylinder collar resists wrenches.

Pick resistant 5 or 6 pin tumbler cylinder removable for rekeying and reversible.




Turn button shape L01.

Exterior thumb piece.



Interior Lever REVERSIBLE with visible mounting screw.

Smooth design
Beautiful figure
Strong
Heavy
Comfortable.

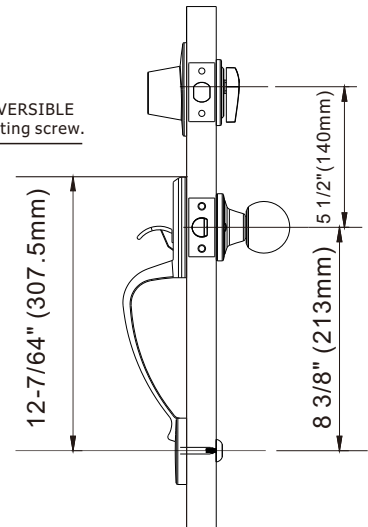


8531-L43-SN



8531-K87-SN



8531ZS-K87-SN


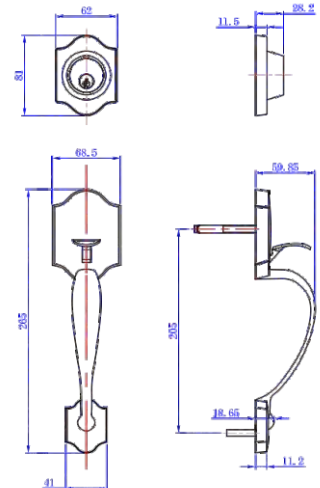


8521 SERIES

Solid Brass Pitcher Handleset Meets ANSI A156.2 Grade 3

- **Door Prep:** Cross bore 2-1/8" (54mm) , Edge bore 1" (25mm) , Latch face 1"x2-1/4" (25x57mm).
- **Door Thick:** Fit doors 1-3/8" (35mm) to 2-3/8" (45mm) thick.
- **Backset:** Adjustable 2-3/8" (60mm) or 2-3/4" (70mm).
- **Latch:** Full 1" (25mm) throw deadbolt with hardened bolt; 1/2" throw spring latch smooth operated by thumb piece on outside and knob on inside .
- **Cylinder:** 5 or 6 pin removable core, Schlage C Keyway or Kwikset or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4" (25x57mm) as standard.
- **Strike:** Full lip 1"x2-1/4" (25x57mm) square corner standard; radius corner also available.

CODE: 8 52 1 -K87-RB

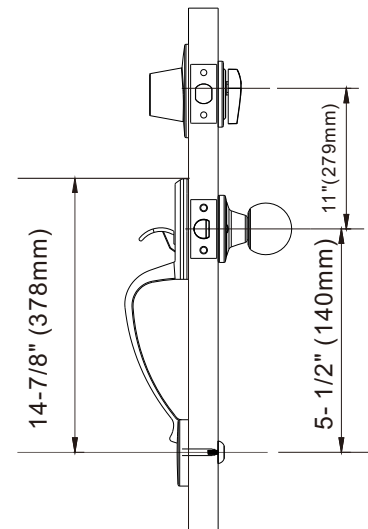


8521-K87-RB

H8591 SERIES

Solid Brass Pitcher Handleset

When combined with keylock gives appearance of an expensive.
2-1/8" (54mm) Hole Dia. Fit all makes & models of Tubular & Cylindrical locksets.
Simple to install with included fasted screws.
Package availbel White Box with label or Individually Display Carded.






H8591PB

80 SERIES


Zinc Alloy Pitcher Handleset Meets ANSI A156.2 Grade 3

- **Door Prep:** Cross bore 2-1/8" (54mm) , Edge bore 1" (25mm) , Latch face 1"x2-1/4" (25x57mm).
- **Door Thick:** Fit doors 1-3/8" (35mm) to 2-3/8" (45mm) thick.
- **Backset:** Adjustable 2-3/8" (60mm) or 2-3/4" (70mm).
- **Latch:** Full 1" (25mm) throw deadbolt with hardened bolt;
1/2" throw spring latch smooth operated by thumb piece on outside and knob on inside .
- **Cylinder:** 5 or 6 pin removable core, Schlage C Keyway or Kwikset or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4" (25x57mm) as standard.
- **Strike:** Full lip 1"x2-1/4" (25x57mm) square corner standard; radius corner also available.


CODE: 8 52 1 -K87-RB

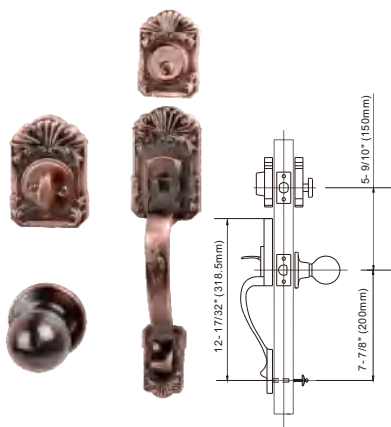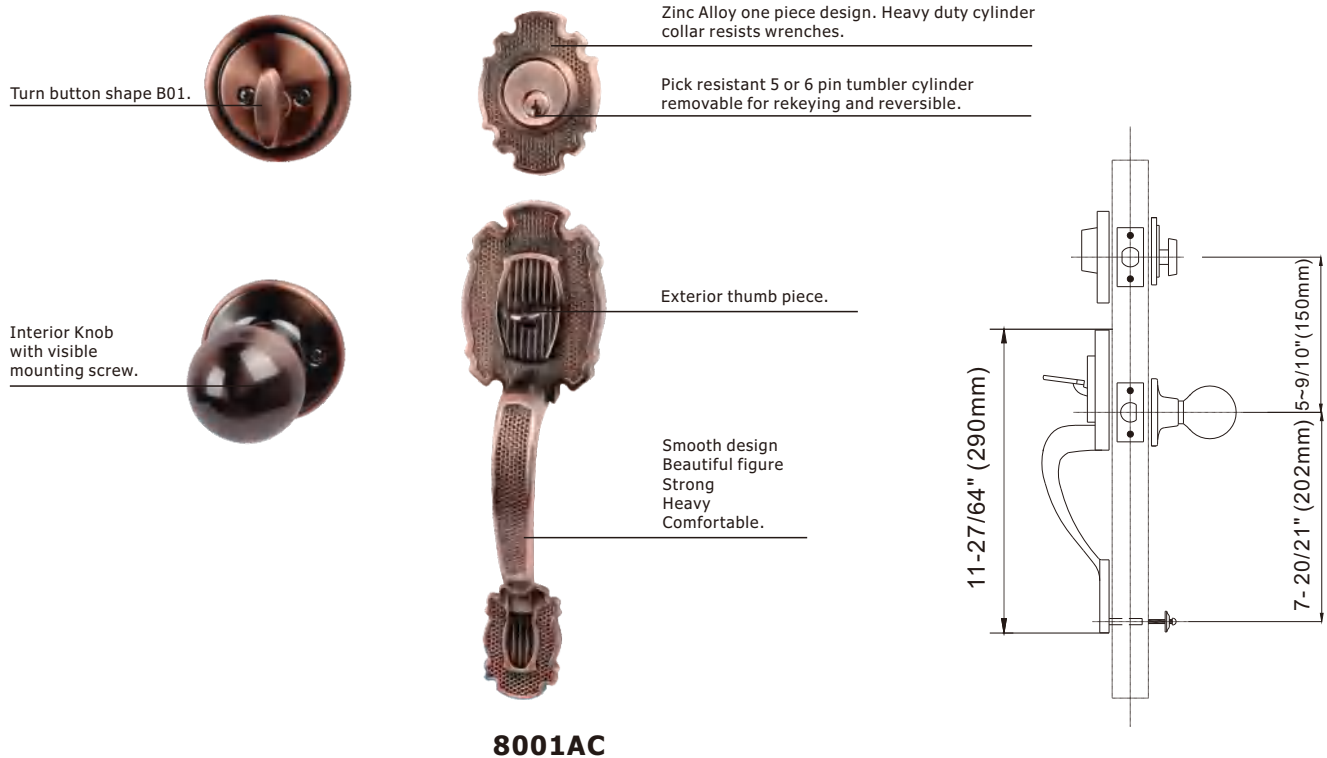

8021AC

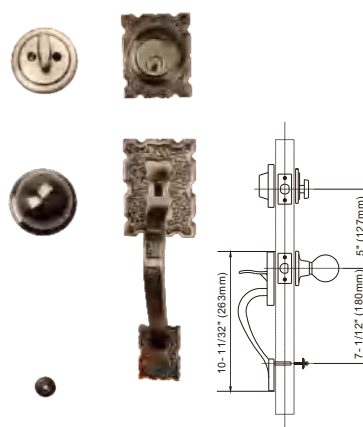

8041AB

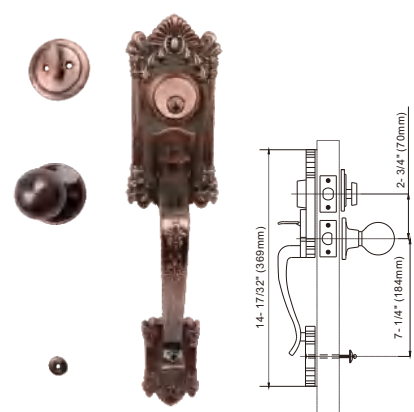



8071AC

80 SERIES


Zinc Alloy Pitcher Handleset Meets ANSI A156.2 Grade 3

- **Door Prep:** Cross bore 2-1/8"(54mm) , Edge bore 1"(25mm) , Latch face 1"x2-1/4"(25x57mm).
- **Door Thick:** Fit doors 1-3/8"(35mm) to 2-3/8"(45mm) thick.
- **Backset:** Adjustable 2-3/8"(60mm) or 2-3/4"(70mm).
- **Latch:** Full 1"(25mm) throw deadbolt with hardened bolt; 1/2" throw spring latch smooth operated by thumb piece on outside and knob on inside .
- **Cylinder:** 5 or 6 pin removable core, Schlage C Keyway or Kwikset or YALE or C4 keyway and other optional.
- **Faceplate:** Square corner 1"x2-1/4"(25x57mm) as standard.
- **Strike:** Full lip 1"x2-1/4"(25x57mm) square corner standard; radius corner also available.

CODE: 8 02 1 -DH-AB

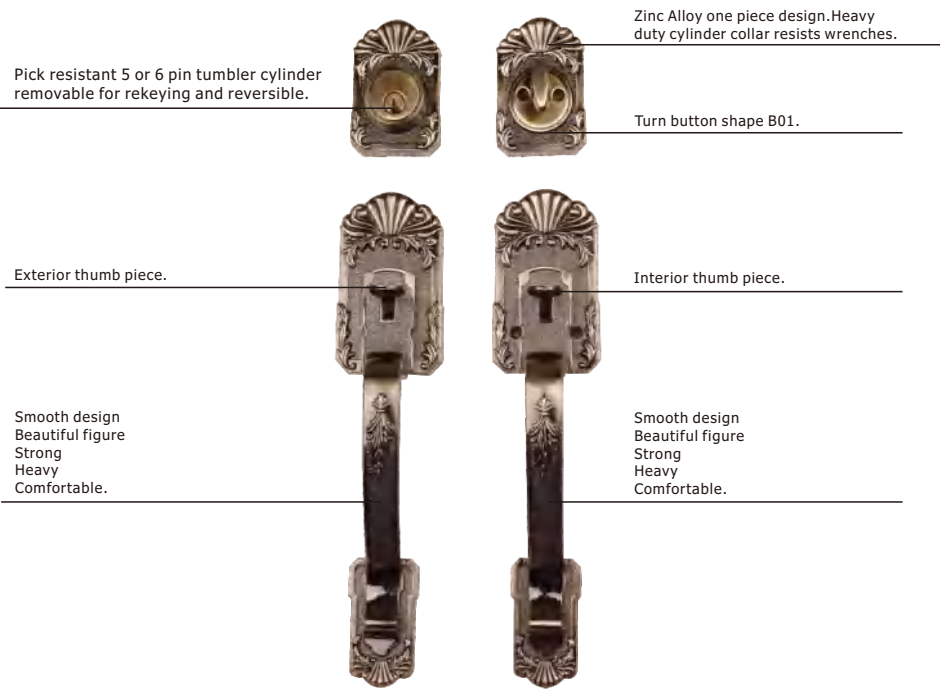

8521DH-AB

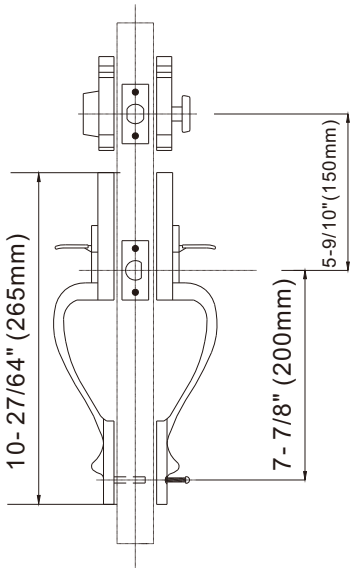

8061DH-AB

